405722

R

200224

Holmes & Narver, Inc.

Engineers - Constructors

1949-50 HORIZONTAL CONTROL SURVEY

ENIWETOK ATOLL, MARSHALL ISLANDS

HORIZONTAL CONTROL SURVEY
ENIWETOK ATOLL
MARSHALL ISLANDS
1949-50

CONTENTS

Summary of general features of the scheme

Location map

Location of control points

Geographic position and azimuth

Field procedure

List of geographic positions

List of directions

Eccentric reductions

Abstract of directions

Computation of triangles

Check computations of Joint Task Force Seven Survey

Computation of geographic positions

Base line computations

Station discription and recovery notes

Vertical control

A scheme of second order triangulation composed of check figures was executed from a second order base line on Runit Island. The scheme extends northward to Bogallua Island and southward to Eniwetok Island. The survey was for the purpose of coordinating local surveys on project islands and to establish distances and azimuths between certain installations.

Standard procedure and specifications of the U.S. Coast and Geodetic Survey for second order triangulation was the criteria for this survey. The geometry of the scheme was checked by the Los Angeles Office of that organization before field work started and the results of observing the scheme were checked as to procedure in January of this year.

The scheme was so executed that it can be expanded to include the complete atoll and where possible the permanency of station locations was considered. All station markers on project islands were referenced. Referencing of the two stations in the lagoon and on the sand spits south of Runit Were not pratical.

Two previous surveys have been made of the eastern portions of the atoll. As stated in the reconnaissance report of January 7, 1949 these surveys were not readily adapted to the requirements of this project and were necessarily reoccupied to expand the present scheme.

The U.S.S. BOWDITCH SURVEY made in 1944 was of third order accuracy and covered the eastern portion of the atoll from Igurin to Bogumbogo. The apparent purpose was hydrographic charts of the atoll. It included a base line on Runit Island and control points on eleven other islands, also a station in the lagoon in the vicinity of the existing station, Coral. The geographical position of station North Base on Runit Island and the azimuth of the base line between stations North Base and South Base were determined by astronomical observations. As most of the stations on this survey were not on project islands and the reoccupation of its stations would have been necessary in any case for system expansion the values found in th e U.S.S. Bowditch Survey were not incorporated into the present survey, except that the Joint Task Force Seven Survey determination of the latitude and longitude of station Runit was based on the original geographical position of station North

A copy of the Report of the Engineer, Joint Task Force Seven, Part 2 was made available to us and has been of great assistance in planning and executing this survey.

Base as established by this survey. Also, the azimuth of the line North Base-Sand was accepted.

The JOINT TASK FORCE SEVEN SURVEY made in 1947-48 and covering the eastern portion of the lagoon from Aniyaanii to Engebi, consisted of a limited scheme with stations on Engebi, Aoman, Runit and Aniyaanii and station Coral in the lagoon.

The scheme was stated to be of first order accuracy and first order procedure was used. However, the base expansion figure was not consistant with specifications of the U.S. Coast and Geodetic Survey and it was only because of the limited extent of the scheme that it could be considered of a high order of accuracy.

Of the seven stations included in this survey, station Graflex on Aoman Island had been destroyed and the station on Aniyaanii was of little value in expanding the scheme. To establish a new station on Aoman for the present survey required reoccupying three of the five remaining stations. It thus was apparent that the expanded requirements of the present survey involved re-establishment of a complete triangulation network.

Station South Base of the U.S.S. Bowditch Survey was not recovered and a new station "Runit" was established at the south end of the island. The line North Base-Runit became the base line of this survey.

The geographical position of station North Base and the azimuth of the line North Base-Sand as established by the U.S.S. Bowditch Survey were accepted and became the origin of position and azimuth. Although the original azimuth observations were made from station North Base to station South Base an examination of the corrections obtained for the angle in the U.S.S. Bowditch triangulations showed that but little accuracy would be lost by accepting the azimuth of the line from station North Base to station Sand as the basis of azimuths for the survey. Therefore it was considered that reobservation for azimuth was not justified.

The line North Base-Runit was measured to first order accuracy and the azimuth of the line was computed from its relation to the line N. Base-Sand.

[illegible] involved in establishing the azimuth of this new base line [illegible] for reference purposes.

Location of Control Points

To meet the requirements of the present project, a horizontal net has been established consisting of fifteen stations, including five stations of the Joint Task Force Seven Survey. Two of these five were original stations of the U.S.S. Bowditch Survey, and an additional station of that survey on Eniwetok is also included. Stations are located so that all project islands are tied in directly to the scheme or can be tied in by local triangulation. A new station in the lagoon off the south end of Runit Island was established to strengthen the base expansion quadrangle.

Where practical, stations have been given the name of the island on which they are located. This was done to simplify reference to these stations. Some of the U.S.S. Bowditch and Joint Task Force Seven stations have been renamed and reference to this is made in the station recovery notes. The stations of the survey and location are as follows:

BOGA -------- Bogallua Island
Teiteir ----- Teiteiripucchi Island
Engebi ------ Engebi Island
Bokon ------- Bokonaarappu Island
Aomon ------- Aomon Island
Piiraai ----- Piiraai Island
North Base -- Runit Island
Runit ------- Runit Island
Coral ------- In lagoon
Pinnacle ---- In lagoon
Photo ------- Photo tower in lagoon
Islet ------- First sand island south of Runit
Sand -------- Third sand island south of Runit
Aniyaanii --- Aniyaanii Island
Parry ------- Parry Island
Eniwetok ---- Eniwetok Island

The islands of Muzinbaarikku, Kirinian and Aareaubiru will be tied in by local triangulation. Japtan is not included in present control requirements but can be tied in by the same method if desired.

Geographic Position and Azimuth

In the interests of economy and because we concurred with the Joint Task Force Seven Survey that little accuracy would be lost, it was our intention to accept the geographical position of station North Base and the azimuth of the new base line as the origin of position and azimuth for the present survey. Also the length of the base line would be accepted.

In observing for the present survey the base expansion quadrangle was observed last due to the necessity of constructing the new station, Pinnacle, in the lagoon. The results obtained indicated that the present location of the marker was eccentric to the position from which the Task Force Seven observations were taken and could not be accepted as the point of origin of the present survey. A computed difference of approximately four tenths of a foot in a northeasterly direction was found. This difference may have been caused by physical displacement of the monument.

The Los Angeles office of the U.S.C.& G.S. concurred in the conclusion that station North Base could not be accepted as being in its true position, also in the decision to measure the line from the present position of station North B ase to station Runit to establish a base line for the present survey. The geographical position of station Runit and the azimuth of the line from station Runit to station Coral would be accepted for position and azimuth as the limited extent of the adjustments involved would not appreciably effect the accuracy requirements of this project.

Field Procedure

A reconnaissance of all locations involved was made and markers set for the triangulation stations. Actual observing on this survey started in October, 1949.

The observing party consisted of an observer, recorder and a varying number of light tenders. The party was quartered on an L.C.T. which moved to convenient points in the lagoon as required. An L.C.M. and a DUKW were used for transportation to the stations, and when practical, planes were used between the islands having landing strips.

Four Bilby steel towers were available for the survey and were moved to new stations as the survey progressed. Where low towers could be used they were constructed of wood. The towers were adequately braced and little vibration was experienced. All observing was at night using lights for targets. A Wild T-2 theodolite was used for observing and found to be very satisfactory. Some difficulty was experienced with the exterior lighting probably due to moisture. Station lights were constructed from U.S. Navy battle lamps by installing a rheostat. This made it possible to dim the lights to correct intensity and they made a satisfactory target.

Continuous inter-station communications were considered necessary due to the remote location of the stations. This was realized by using U.S. Army Type 619 portable radios. Considerable time was saved by this means of communication as the light intensity could be adjusted instantly and changes in plans could be transmitted to all personnel involved. This was often necessary due to weather conditions.

The observing was done at a period of the year when considerable rain and high wind velocity was experienced. Some time was lost due to weather both in being unab le to get to the stations and poor visibility while occupying the stations.

Water transportation was adequate but necessarily slow and the personnel were usually away from the base of operations fourteen to sixteen hours.

Travel after dark in the lagoon was considered dangerous and the personnel were distributed before dark and picked up after sunrise in the morning.

Observing procedure consisted of adjusting the intensity of the station lights to the minimum which could be observed thereby obtaining a small targer considering the distance involved. This was done as early in the evening as sufficient darkness was obtained and from one to three sets of six positions each were observed. Due to weather it was sometimes only possible to complete one satisfactory set in an evening. From two to five hours were spent in observing. When results obtained were within the specifications of the U.S. Coast and Geodetic Survey no attempt was made to obtain further refinement.

The strength of figures obtained for the net was an RI of 74.4 with a maximum of 130 allowed.

A maximum triangle closure of 2.5 seconds and an average closure of 1.3 seconds was obtained with the maximum of 8 seconds for one triangle and 3 seconds for the average closure allowed by specifications.

The RUNIT BASE LINE is a broken base consisting of four sections connecting the two stations, North Base and Runit. This was necessary due to the configuration of the island. Traverse Station Runit of the Joint Task Force Seven Survey is an angle point in this traverse and was also included in the former traverse.

Standard procedure of the U.S. Coast and Geodetic Survey for second order base line measurement was used. Angles were measured with the Wild T-2 theodolite and the measurement was made with three Lovar tapes using thermometers and stretcher apparatus of an approved type. The calibration certificates of these tapes are included in the record of the survey.

Stakes were set at fifty meter intervals for chaining points and the tapes were alternated so that in completing the forward and backward measurement all three tapes were used in each direction.

Due to the velocity of the wind at this period of the year it was necessary to use a wind break in order to obtain accurate results. This consisted of a thirty

six inch strip of canvas approximately fifty five meters long which was held parallel to the line as each measurement was made.

The computed probable error of the total measurement is 1 part in 648,000. The allowable maximum probable error is one part in 500,000.

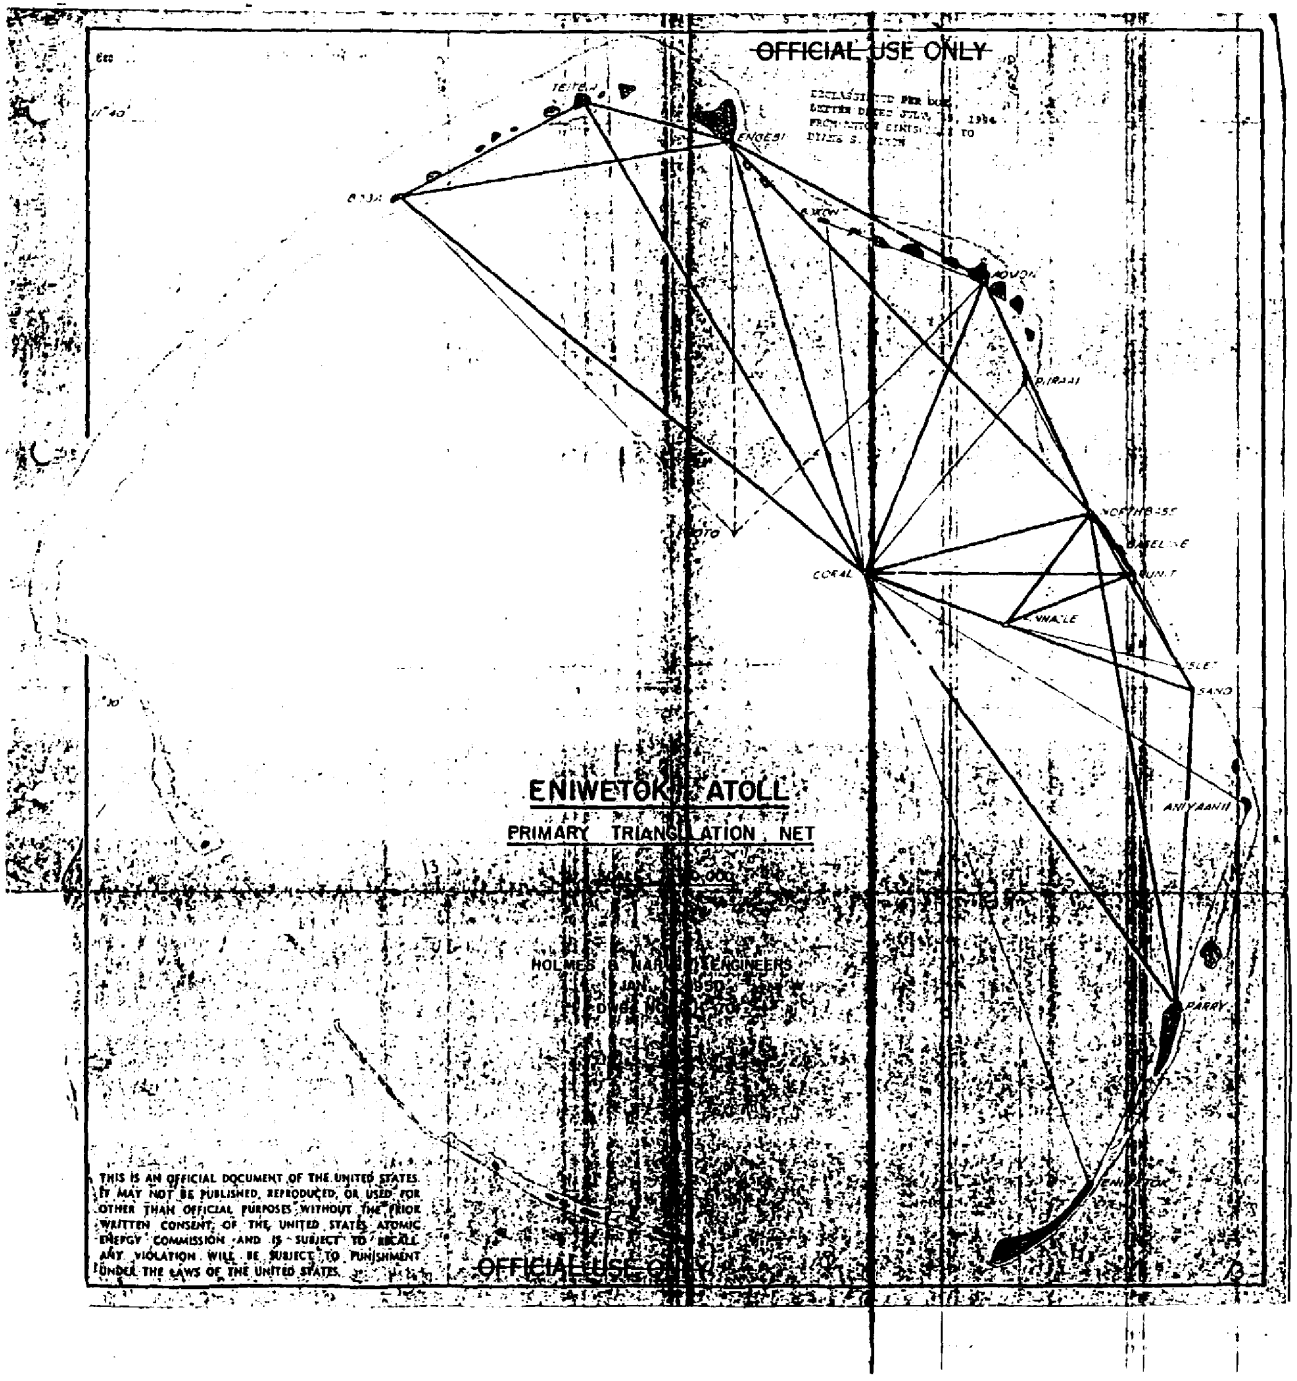
OFFICIAL USE ONLY
ENGEBI
AOMON
KOUKI
DIJRAJI
CORAL
WHALE
SAND
ANIYAANII
PARRY
ENIWETOK ATOLL
PRIMARY TRIANGULATION NET
HOLMES & NARVER, ENGINEERS
THIS IS AN OFFICIAL DOCUMENT OF THE UNITED STATES. IT MAY NOT BE PUBLISHED, REPRODUCED, OR USED FOR OTHER THAN OFFICIAL PURPOSES WITHOUT THE PRIOR WRITTEN CONSENT OF THE UNITED STATES ATOMIC ENERGY COMMISSION AND IS SUBJECT TO RECALL. ANY VIOLATION WILL BE SUBJECT TO PUNISHMENT UNDER THE LAWS OF THE UNITED STATES.
OFFICIAL USE ONLY

HOLMES & NARVER ENGINEERS JOB NO. 640

GEOGRAPHIC POSITIONS

LOCALITY ENIWETOK ATOLL MARSHALL ISLANDS DATUM ENIWETOK ASTRONOMIC 1944 SECOND ORDER TRIANGULATION

STATION	LATITUDE AND LONGITUDE	SECONDS IN METERS	AZIMUTH	BACK AZIMUTH	TO STATION	DISTANCE		
						LOGARITHM METERS	METERS	FEET
Pinnacle	11-31-26.010 N		109-36-57.6	289-56-26.8	Coral	3.6959722	4965.61	16291.3
	162-19-45.307 E		215-25-34.5	35-25-51.4	North Base	3.6455679	4421.48	14506.1
			249-34-07.5	69-34-34.8	Runit	3.6442259	4407.84	14461.4
			282-51-12.0	102-51-49.4	Islet	3.7649177	5819.93	19094.2
Aoman	11-37-15.282 N		336-29-53.3	156-30-13.8	North Base	3.8906165	7773.50	25503.6
	162-19-27.584 E		24-32-57.2	204-32-29.8	Coral	3.9984988	9965.49	32695.1
			46-21-59.5	226-21-04.6	Photo	4.0588211	11450.40	37566.9
			111-26-41.6	291-26-06.9	Bokon	3.7491203	5612.03	18412.1
			118-38-56.3	298-38-01.3	Engebi	3.9732497	9402.64	30848.5
Engebi	11-39-41.964 N		298-38-01.3	118-38-56.3	Aoman	3.9732497	9402.64	30848.5
	162-14-55.152 E		343-08-00.5	163-08-27.9	Coral	4.1517262	14181.63	46527.6
			0-09-02.6	180-09-02.4	Photo	4.0937487	12409.34	40713.0
			80-45-22.3	260-44-14.1	Boga	4.0156166	10366.13	34009.5
			103-29-31.7	283-29-00.1	Teiteir	3.6867231	4860.97	15948.0
Boga	11-38-47.715 N		260-44-14.1	80-45-22.3	Engebi	4.0156166	10366.13	34009.5
	162-09-17.366 E		309-40-17.6	129-41-52.8	Coral	4.2705251	18643.40	61165.9
			316-28-20.9	136-29-28.6	Photo	4.1706707	14813.95	48602.1
Teiteir	11-40-18.863 N		283-29-00.1	103-29-31.7	Engebi	3.6867231	4860.97	15948.0
	162-12-19.086 E		328-58-32.4	148-59-31.2	Coral	4.2344911	17158.96	56295.7
Bokon	11-38-22.046 N		291-26-06.9	111-26-41.6	Aoman	3.7491203	5612.03	18412.1
	162-16-35.138 E		354-25-31.8	174-25-39.0	Coral	4.0480178	11169.09	36643.9

16

HOLMES & NARVER ENGINEERS JOB Nº 640

~~OFFICIAL USE ONLY~~

GEOGRAPHIC POSITIONS

LOCALITY Eniwetok Atoll Marshall Islands DATUM Eniwetok Astronomic 1944 Second ORDER TRIANGULATION

STATION	LATITUDE AND LONGITUDE	SECONDS IN METERS	AZIMUTH	BACK AZIMUTH	TO STATION	DISTANCE		
						LOGARITHM METERS	METERS	FEET
North Base	11-33-23.267N		322-47-25.7	142-47-36.1	Runit	3.4136308	2591.9749	8503.84
	162-21-09.893E		327-56-56.1	147-57-19.5	Sand	3.8247895	6680.20	21916.6
			35-25-51.4	215-25-34.5	Pinnacle	3.6455679	4421.48	14506.1
			75-02-07.9	255-01-20.1	Coral	3.8747533	7494.68	24588.8
			156-30-13.8	336-29-53.3	Aoman	38906165	7773.50	25503.6
			154-55-56.7	334-55-44.2	Piiraai	3.6491067	4457.66	14624.8
Runit	11-32-16.080N		331-25-38.2	151-25-48.3	Islet	3.5087376	3226.54	10585.7
	162-22-01.621E		69-34-34.8	249-34-07.5	Pinnacle	3.6442259	4407.84	14461.4
			142-47-36.1	322-47-25.7	North Base	3.4136308	2591.9749	8503.84
Coral	11-32-20.254N		255-01-20.1	75-02-07.9	North Base	3.8747533	7494.68	24588.8
	162-17-10.944E		289-02-53.4	109-04-04.5	Sand	4.0573318	11411.21	37438.3
			289-36-26.8	109-36-57.6	Pinnacle	3.6959722	4965.61	16291.3
			300-55-07.4	120-56-28.8	Aniyaanii	4.1585639	14406.68	47265.9
			324-04-06.6	144-05-13.0	Parry	4.2360560	17220.90	56498.9
			339-03-46.6	159-04-35.0	Eniwetok	4.3156485	20684.66	67862.9
			129-41-52.8	309-40-17.6	Boga	4.2705251	18643.40	61165.9
			148-59-31.2	328-58-32.4	Teiteir	4.2344911	17158.96	56295.7
			163-08-27.9	343-08-00.5	Engebi	4.1517262	14181.63	46527.6
			174-25-39.0	354-25-31.8	Bokon	4.0480178	11169.09	36643.9
			204-32-29.8	24-32-57.2	Aoman	3.9984988	9965.49	32695.1
			221-50-49.3	41-51-24.7	Piiraai	3.9041724	8019.96	26312.2

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB NO 640

~~OFFICIAL USE ONLY~~

GEOGRAPHIC POSITIONS

LOCALITY Eniwetok Atoll Marshall Islands DATUM Eniwetok Astronomic 1944 Second ORDER TRIANGULATION

STATION	LATITUDE AND LONGITUDE	SECONDS IN METERS	AZIMUTH	BACK AZIMUTH	TO STATION	DISTANCE		
						LOGARITHM METERS	METERS	FEET
Pinnacle	11-31-26.010 N		109-36-57.6	289-36-26.8	Coral	3.6959722	4965.61	16291.3
	162-19-45.307 E		215-25-32.5	35-25-51.4	North Base	3.6455679	4421.48	14506.1
			249-34-07.5	69-34-34.8	Runit	3.6442259	4407.84	14461.4
			282-51-12.0	102-51-49.4	Islet	3.7649177	5819.93	19094.2
Aoman	11-37-15.282 N		336-29-53.3	156-30-13.8	North Base	3.8906165	7773.50	25503.6
	162-19-27.584 E		24-32-57.2	204-32-29.8	Coral	3.9984988	9965.49	32695.1
			46-21-59.5	226-21-04.6	Photo	4.0588211	11450.40	37566.9
			111-26-41.6	291-26-06.9	Bokon	3.7491203	5612.03	18412.1
			118-38-56.3	298-38-01.3	Engebi	3.9732497	9402.64	30848.5
Engebi	11-39-41.964 N		298-38-01.3	118-38-56.3	Aoman	3.9732497	9402.64	30848.5
	162-14-55.152 E		343-08-00.5	163-08-27.9	Coral	4.1517262	14181.63	46527.6
			0-09-02.6	180-09-02.4	Photo	4.0937487	12409.34	40713.0
			80-45-22.3	260-44-14.1	Boga	4.0156166	10366.13	34009.5
			103-29-31.7	283-29-00.1	Teiteir	3.6867231	4860.97	15948.0
Boga	11-38-47.715 N		260-44-14.1	80-45-22.3	Engebi	4.0156166	10366.13	34009.5
	162-09-17.366 E		309-40-17.6	129-41-52.8	Coral	4.2705251	18643.40	61165.9
			316-28-20.9	136-29-28.6	Photo	4.1706707	14813.95	48602.1
Teiteir	11-40-18.863 N		283-29-00.1	103-29-31.7	Engebi	3.6867231	4860.97	15948.0
	162-12-19.086 E		328-58-32.4	148-59-31.2	Coral	4.2344911	17158.96	56295.7
Bokon	11-38-22.046 N		291-26-06.9	111-26-41.6	Aoman	3.7491203	5612.03	18412.1
	162-16-35.138 E		354-25-31.8	174-25-39.0	Coral	4.0480178	11169.09	36643.9

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB NO 640

GEOGRAPHIC POSITIONS

LOCALITY *ENIWETOK ATOLL MARSHALL ISLANDS* DATUM *ENIWETOK ASTRONOMIC 1944* *SECOND* ORDER TRIANGULATION

STATION	LATITUDE AND LONGITUDE	SECONDS IN METERS	AZIMUTH	BACK AZIMUTH	TO STATION	DISTANCE		
						LOGARITHM METERS	METERS	FEET
Piiraai	11-35-34.679 N		334-55-44.2	154-55-56.7	North Base	3.6491067	4457.66	14624.8
	162-20-07.552 E		41-51-24.7	221-50-49.3	Coral	3.9041724	8019.96	26312.2
Islet	11-30-43.856 N		102-51-49.4	282-51-12.0	Pinnacle	3.7649177	5819.93	19094.2
	162-22-52.644 E		151-25-48.3	331-25-38.2	Runit	3.5087376	3226.54	10585.7
Sand	11-30-18.985 N		3-49-52.1	183-49-47.6	Parry	4.0104080	10242.55	33604.1
	162-23-06.870 E		109-04-04.5	289-02-53.4	Coral	4.0573318	11411.21	37438.3
			147-57-19.5	327-56-56.1	North Base	3.8247895	6680.20	21916.6
Parry	11-24-46.372 N		144-05-13.0	324-04-06.6	Coral	4.2360560	17220.90	56498.9
	162-22-44.294 E		183-49-47.6	3-49-52.1	Sand	4.0104080	10242.55	33604.1
			199-01-47.4	19-02-02.2	Aniyaanii	3.8400459	6919.04	22700.2
			26-48-35.5	206-48-17.8	Eniwetok	3.7796823	6021.19	19754.5
Aniyaanii	11-28-19.252 N		120-56-28.8	300-55-07.4	Coral	4.1585639	14406.68	47265.9
	162-23-58.729 E		19-02-02.2	199-01-47.4	Parry	3.8400459	6919.04	22700.2
Eniwetok	11-21-51.465 N		159-04-35.0	339-03-46.6	Coral	4.3156485	20684.66	67862.9
	162-21-14.725 E		206-48-17.8	26-48-35.5	Parry	3.7796823	6021.19	19754.5
Photo	11-32-58.091 N		136-29-28.6	316-28-20.9	Baga	4.1706707	14813.95	48602.1
	162-14-54.074 E		180-09-02.4	0-09-02.6	Engebi	4.0937487	12409.34	40713.0
			226-21-04.6	46-21-59.5	Aomon	4.0588211	11450.40	37566.9

HOLMES & NARVER, ENGINEERS JOB NO 640

GEOGRAPHIC POSITIONS

LOCALITY *ENIWETOK ATOLL MARSHALL ISLANDS* DATUM *ENIWETOK ASTRONOMIC 1944* *SECOND* ORDER TRIANGULATION

STATION	LATITUDE AND LONGITUDE	SECONDS IN METERS	AZIMUTH	BACK AZIMUTH	TO STATION	DISTANCE		
						LOGARITHM METERS	METERS	FEET
Piiraai	11-35-34.679 N		334-55-24.2	154-55-56.7	North Base	3.6491067	4457.66	14624.8
	162-20-07.552 E		41-51-24.7	221-50-49.3	Coral	3.9041724	8019.96	26312.2
Islet	11-30-43.856 N		102-51-49.4	282-51-12.0	Pinnacle	3.7649177	5819.93	19094.2
	162-22-52.644 E		151-25-48.3	331-25-38.2	Runit	3.5087376	3226.54	10585.7
Sand	11-30-18.985 N		3-49-52.1	183-49-47.6	Parry	4.0104080	10242.55	33604.1
	162-23-06.870 E		109-04-04.5	289-02-53.4	Coral	4.0573318	11411.21	37438.3
			147-57-19.5	327-56-56.1	North Base	3.8247895	6680.20	21916.6
Parry	11-24-46.372 N		144-05-13.0	324-04-06.6	Coral	4.2360560	17220.90	56498.9
	162-22-44.294 E		183-49-47.6	3-49-52.1	Sand	4.0104080	10242.55	33604.1
			199-01-47.4	19-02-02.2	Aniyaanii	3.8400459	6919.04	22700.2
			26-48-35.5	206-48-17.8	Eniwetok	3.7796823	6021.19	19754.5
Aniyaanii	11-28-19.252 N		120-56-28.8	300-55-07.4	Coral	4.1585639	14406.68	47265.9
	162-23-58.729 E		19-02-02.2	199-01-47.4	Parry	3.8400459	6919.04	22700.2
Eniwetok	11-21-51.465 N		159-04-35.0	339-03-46.6	Coral	4.3156485	20684.66	67862.9
	162-21-14.725 E		206-48-17.8	26-48-35.5	Parry	3.7796823	6021.19	19754.5
Photo	11-32-58.091 N		136-29-28.6	316-28-20.9	Boga	4.1706707	14813.95	48602.1
	162-14-54.074 E		180-09-02.4	0-09-02.6	Engebi	4.0937487	12409.34	40713.0
			226-21-04.6	46-21-59.5	Aomon	4.0588211	11450.40	37566.9

~~OFFICIAL USE ONLY~~

LIST OF DIRECTIONS

STATION ANIYAANII (Kodak) DATE 3/17/50

CHIEF OF PARTY LSH COMPUTED BY LSH

OBSERVER FPC CHECKED BY LMP

OBSERVED STATION	OBSERVED DIRECTION	ECC. RED.	SEA LEVEL RED.	CORRECTED DIR. ZERO INITIAL	ADJ. DIR.
Parry	0° 00' 00.00"			0° 00' 00.00"	
Coral	101-54-26.6	-			
R.M. No. I 17.495 M	214-55-42.6	-			
Photo Tower 21.425 M	304-50-46.2	-			
R.M. No. 2 33.778 M	326-01-28.6	-			

No eccentricity of lights or instrument at this station

Observations made from a 16 foot wood tower

Reference marks were established by the Joint Task Force Seven Survey

~~OFFICIAL USE ONLY~~

LIST OF DIRECTIONS

STATION BOGA DATE 3/17/50

CHIEF OF PARTY LSH COMPUTED BY LSH

OBSERVER FPC CHECKED BY LMP

OBSERVED STATION	OBSERVED DIRECTION	ECC. RED.	SEA LEVEL RED.	CORRECTED DIR. ZERO INITIAL	ADJ. DIR.
Coral	0° 00' 00.00"			0° 00' 00.00"	
Photo	6-48-04.0	-			
R.M. No. 1 59.015 M	94-53-50.0	-			
R.M. No. 2 36.576 M	154-54-00.0	-			
Teiteir	293-21-24.7	-			
Engebi	311-03-56.3	-			

No eccentricity of lights or instrument at this station

Observations made from 40 foot steel tower

Reference marks are bronze disks in concrete blocks

HOLMES & NARVER ENGINEERS JOB No. 640

~~OFFICIAL USE ONLY~~

LIST OF DIRECTIONS

STATION BOKON DATE 3/17/50

CHIEF OF PARTY LSH COMPUTED BY LSH

OBSERVER FPC CHECKED BY LMP

OBSERVED STATION	OBSERVED DIRECTION	ECC. RED.	SEA LEVEL RED.	CORRECTED DIR. ZERO INITIAL	ADJ. DIR.
Aomon	0° 00' 00.00"			0° 00' 00.00"	
Coral	62-59-24.7	-			
R.M. No. 1 15.240 M	207-24-12.2	-			
R.M. No. 2 15.240 M	279-24-12.2	-			

No eccentricity of lights or instrument at this station

Observations made from a 15 foot wood tower

Reference marks are bronze disks in concrete blocks

LIST OF DIRECTIONS

STATION CORAL DATE 3/17/50

CHIEF OF PARTY LSH COMPUTED BY LSH

OBSERVER FPC CHECKED BY LMP

OBSERVED STATION	OBSERVED DIRECTION	ECC. RED.	SEA LEVEL RED.	CORRECTED DIR. ZERO INITIAL	ADJ. DIR.
N. Base	0° 00' 00.00"			0° 00' 00.00"	
Runit	15-46-14.6	-			
Sand	34-01-32.5	-			
Pinnacle	34-35-07.2	-			
Aniyaanii	45-53-47.1	-			
Parry	69-02-46.3	-			
Eniwetok	84-03-20.2	-54.0			02-26.2
Boga	234-40-33.4	-			
Teiteir	253-58-12.8	-			
Engebi	268-07-08.7	-			
Bokon	279-24-19.4	-			
Aomon	309-31-10.1	-			
Piiraai	326-49-29.3	-			

No eccentricity of lights or instrument at this station

Observations made from a 14 foot wood tower set on existing circular concrete cell

No reference marks set

~~OFFICIAL USE ONLY~~

LIST OF DIRECTIONS

STATION ENGEBI (Elgin) DATE 3/17/50

CHIEF OF PARTY LSH COMPUTED BY LSH

OBSERVER FPC CHECKED BY FPC

OBSERVED STATION	OBSERVED DIRECTION	ECC. RED.	SEA LEVEL RED.	CORRECTED DIR. ZERO INITIAL	ADJ. DIR.
Coral	0° 00' 00.00"			0° 00' 00.00"	
Photo	17-01-02.5	-			
Boga	97-37-22.0	-			
Teiteir	120-21-30.3	-			
R.M. No. 1 15.240 M	105-11-10.0	-			
R.M. No. 2 15.240 M	195-11-10.0	-			
Aomon	315-30-01.4	-			
N. Base	322-39-45.3	-			

No eccentricity of lights or instrument at this station

Observations made from 40 foot steel tower

Reference marks are bronze disks in concrete blocks

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB Nº. 640

~~OFFICIAL USE ONLY~~

LIST OF DIRECTIONS

STATION ENIWETOK (Privilege) DATE 3/17/50

CHIEF OF PARTY LSH COMPUTED BY LSH

OBSERVER FPC CHECKED BY LMP

OBSERVED STATION	OBSERVED DIRECTION	ECC. RED.	SEA LEVEL RED.	CORRECTED DIR. ZERO INITIAL	ADJ. DIR.
Coral	0° 00' 00.00"			0° 00' 00.00"	
Parry	47-49-22.5	05'-39.8"			43-42.7
R.M. No. 1 11.924 M	62-46-17.4	-			
R.M. No. 2 11.924 M	332-46-17.4	-			

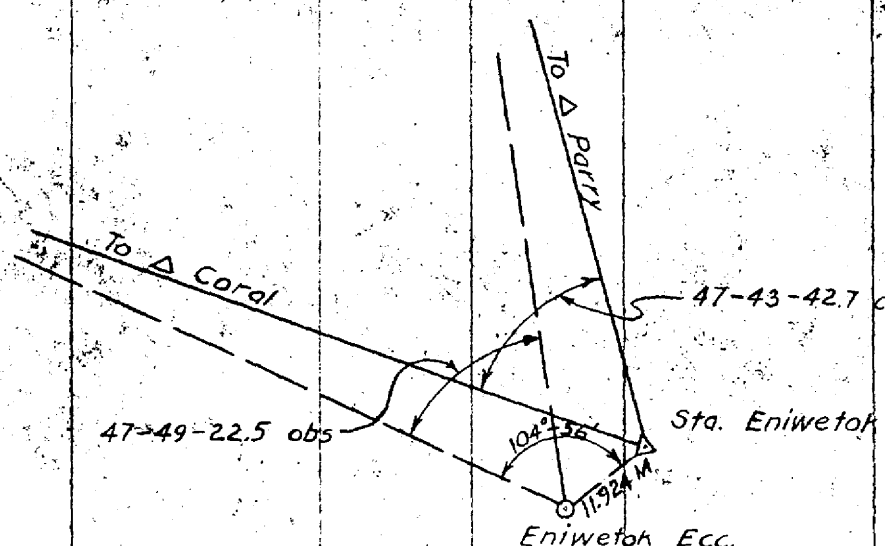

Observations taken from eccentric station

Light was eccentric for observation from Coral
Light was at true station for observation from Parry
Observation was made from a 40 foot steel tower
Reference marks are bronze disks in concrete blocks

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

~~OFFICIAL USE ONLY~~

LIST OF DIRECTIONS

STATION ISLET DATE 3/17/50

CHIEF OF PARTY LSH COMPUTED BY LSH

OBSERVER FFC CHECKED BY LHP

OBSERVED STATION	OBSERVED DIRECTION	ECC. RED.	SEA LEVEL RED.	CORRECTED DIR. ZERO INITIAL	ADJ. DIR.
Coral	0°00'00.00"			0°00'00.00"	
Runit	48-33-58.9	-			

No eccentricity of lights or instrument at this station

Observations made from 11 foot wood tower

No reference monuments set

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

LIST OF DIRECTIONS ~~OFFICIAL USE ONLY~~

STATION NORTH BASE DATE 3/17/50

CHIEF OF PARTY LSH COMPUTED BY LSH

OBSERVER FPC CHECKED BY LMP

OBSERVED STATION	OBSERVED DIRECTION	ECC. RED.	SEA LEVEL RED.	CORRECTED DIR. ZERO INITIAL	ADJ. DIR.
Coral	0° 00' 00.00"			0° 00' 00.00"	
Engebi	60-40-51.5	-			
Piiraai	79-53-48.5	-			
Aomon	81-28-05.5	-			
R.M. No. 3 45.686 M	101-59-20.0	-			
Runit	247-45-17.2	-			
Sand	252-54-49.1	-			
R.M. No. I 31.992 M	267-33-20.0	-			
Parry	274-44-59.7	-			
Pinnacle	320-23-43.0	-			
R.M. No. 2 25.233 M	340-35-50.0	-			

No eccentricity of lights or instrument at this station

Observations made from 40 foot steel tower

Reference marks are bronze disks set in reef ledge

~~OFFICIAL USE ONLY~~

LIST OF DIRECTIONS

STATION PARRY DATE 3/17/50

CHIEF OF PARTY LSH COMPUTED BY LSH

OBSERVER FPC CHECKED BY LMP

OBSERVED STATION	OBSERVED DIRECTION	ECC. RED.	SEA LEVEL RED.	CORRECTED DIR. ZERO INITIAL	ADJ. DIR.
Coral	0° 00' 00.00"			0° 00' 00.00"	
N. Base	25-42-13.5	-			
Sand	39-44-35.3	-			
R.M. No. I 15.246 M	46-34-25.4	-			
Aniyaanii	54-56-34.4	-			
R.M. No. 2 15. 224 M	181-37-20.4	-			
Eniwetok	242-43-22.6	-			

No eccentricity of lights or instrument at this station

Observations made from 25 foot wood tripod in existing steel tower

Reference marks are bronze disks in concrete blocks

~~OFFICIAL USE ONLY~~

LIST OF DIRECTIONS

STATION PIIRAAI DATE 3/17/50

CHIEF OF PARTY LSH COMPUTED BY LSH

OBSERVER FPC CHECKED BY LMP

OBSERVED STATION	OBSERVED DIRECTION	ECC. RED.	SEA LEVEL RED.	CORRECTED DIR. ZERO INITIAL	ADJ. DIR.
N. Base	0° 00' 00.00"			0° 00' 00.00"	
R.M. No. 2 22.860 M	0-31-55.0	-			
Coral	66-55-40.3	-			
R.M. No. I 22.860 M	270-31-55.0	-			

No eccentricity of lights or instrument at this station

Observations taken from 16 foot wood tower

Reference marks are bronze disks in concrete blocks

~~OFFICIAL USE ONLY~~

LIST OF DIRECTIONS

STATION PINNACLE DATE 3/17/50

CHIEF OF PARTY LSH COMPUTED BY LSH

OBSERVER FPC CHECKED BY LMP

OBSERVED STATION	OBSERVED DIRECTION	ECC. REJ.	SEA LEVEL CORRECTED DIR. REDUCED TO ZERO INITIAL	ADJ. DIR.
Coral	° ' "		° ' "	
N. Base	105-48-37.3	-		
Runit	139-57-10.4	-		
Islet	173-14-14.9	-		

No eccentricity of lights or instrument at this station

Observations made from a steel tripod 10 feet above tide level

No reference marks set at this station

LIST OF DIRECTIONS ~~OFFICIAL USE ONLY~~

STATION RUNIT DATE 3/17/50

CHIEF OF PARTY LSH COMPUTED BY LSH

OBSERVER FPC CHECKED BY LMP

OBSERVED STATION	OBSERVED DIRECTION	ECC. RED.	SEA LEVEL RED.	CORRECTED DIR. ZERO INITIAL	ADJ. DIR.
N. Base	0° 00' 00.00"			0° 00' 00.00"	
R.M. No. I 15.520 M	8-37-19.4	-			
R.M. No. 2 14.650 M	107-02-33.4	-			
Islet	188-38-01.9	-			
Pinnacle	286-46-58.5	-			
Coral	308-02-56.2	-			

No eccentricity of lights or instrument at this station

Observations made from 20 foot wood tower

Reference marks shown were established by the Joint Task Force Seven Survey

~~OFFICIAL USE ONLY~~

LIST OF DIRECTIONS

STATION SAND DATE 3/17/50

CHIEF OF PARTY LSH COMPUTED BY LSH

OBSERVER FPC CHECKED BY LMP

OBSERVED STATION	OBSERVED DIRECTION	ECC RED.	SEA LEVEL RED.	CORRECTED DIR ZERO INITIAL	ADJ DIR.
Parry	0° 00' 00.00"			0° 00' 00.00"	
Coral	105-14-13.1	-			
N. Base	144-07-27.3	-			

No eccentricity of lights or instrument at this station

Observations made from 15 foot wood tower

No reference marks set at this station

LIST OF DIRECTIONS

STATION TEITEIR DATE 3/17/50

CHIEF OF PARTY LSH COMPUTED BY LSH

OBSERVER FPC CHECKED BY LMP

OBSERVED STATION	OBSERVED DIRECTION	ECC RED.	SEA LEVEL RED.	CORRECTED DIR. ZERO INITIAL	ADJ. DIR.
Coral	0° 00' 00.00"			0° 00' 00.00"	
Boga	94-03-47.5	-			
R.M. No. I 15.240M	125-23-00.0	-			
R.M. No. 2 15.240M	215-23-00.0	-			
Engebi	314-30-28.4	-			

No eccentricity of lights or instrument at this station

Observations made from 40 foot steel tower

Reference marks are bronze disks in concrete block

Eccentric Station—ENIWETOK

Log. d = 1.07642
colog Sin 1" = 5.31443
6.39085

d = 39.12 Ft. = 11.924 M.

	a ° '	Log. Sin a	Log s Meters	Log($\frac{\text{Sin a}}{\text{s}}$)	Log. red. in seconds	Reduction = C
Parry	255-04	9.98508	3.77967	6.20541	2.59626	394.7"
Coral	207-15	9.66075	4.31566	5.34509	1.73594	54.4"

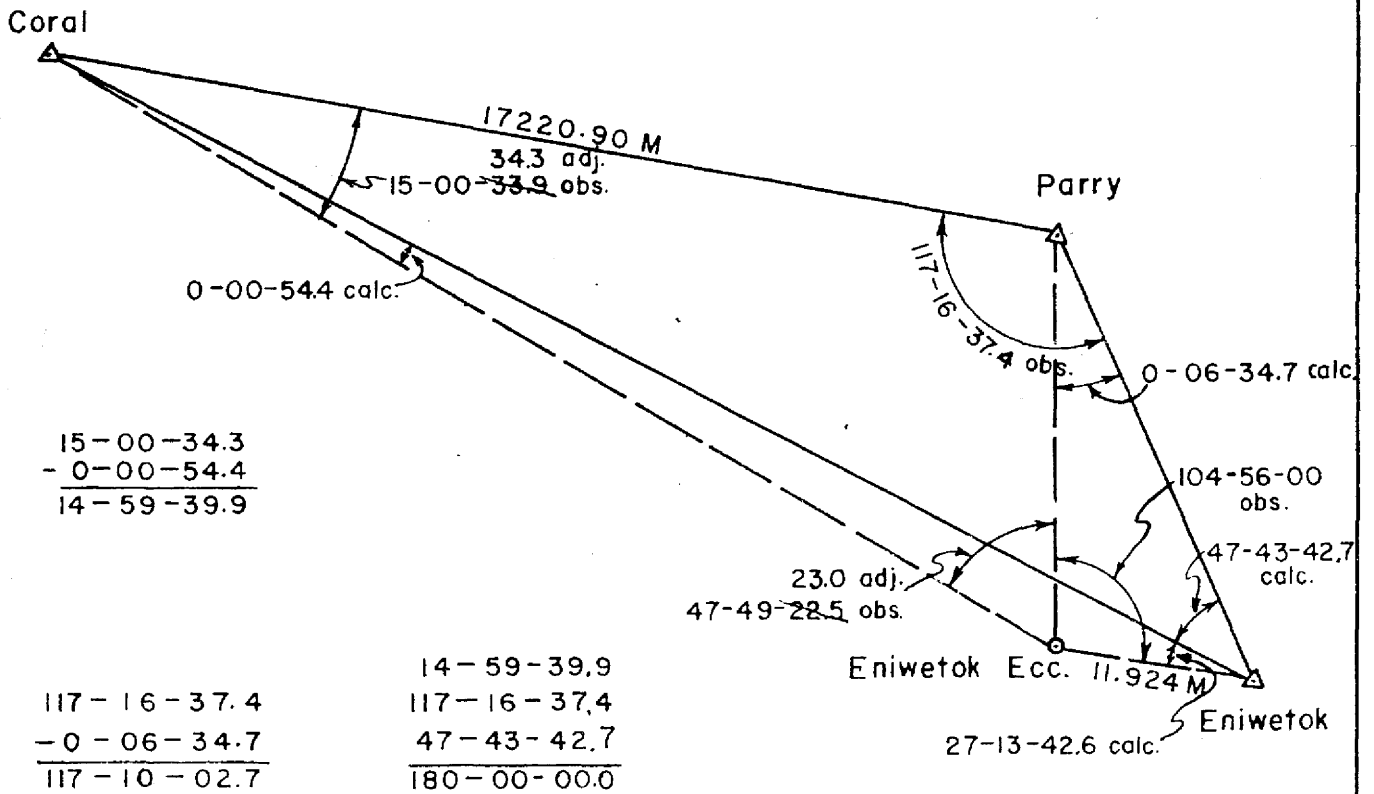

15-00-34.3
- 0-00-54.4
14-59-39.9

117-16-37.4
-0-06-34.7
117-10-02.7

14-59-39.9
117-16-37.4
47-43-42.7
180-00-00.0

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION Aniyaanii COMPUTED BY L.S.H. DATE 12-14-49

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED					
	Parry	Coral				
	INITIAL 0°00'	101°-54'				
1	0.00"	27.0				
2	0 00"	29.5				
3	0.00'	24.1				
4	0 00	26.1				
5	0.00'	29.3				
6	0 00	23.4				
7	0.00'					
8	0.00'					
SUM		159.4				
MEAN		26.6				
CORR FOR ECC.						
DIRECTION		26.6				

DECLASSIFIED PER DOE
[illegible] JUNE 15, 1994
[illegible] PERTINENT TO
DENNIS S. HIXON

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION AOMAN COMPUTED BY L.S.H. DATE Nov. 16, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED			
	Coral	Bokon	Engebi	North Base
	INITIAL 0.00	86°-53'	94°-05'	311°-56'
1	0 00	45.4	59.6	58.2
2	0 00	47.8	59.8	56.6
3	0 00	41.3	56.2	54.5
4	0.00	42.0	00.0	57.7
5	0.00	48.4	59.2	58.6
6	0 00	39.5	56.1	53.1
7	0 00			
8	0 00			
SUM		264.4	350.9	338.7
MEAN		44.1	58.5	56.4
CORR FOR ECC.				
DIRECTION		44.1	58.5	56.4

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB NO. 640

ABSTRACT OF DIRECTIONS

STATION AOMAN COMPUTED BY L.S.H. DATE NOV 29, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED	
	Coral	Photo
	INITIAL 0-00'	21°-49'
1	0.00"	02.1
2	0.00"	02.2
3	0 00'	03.2
4	0.00'	02.6
5	0.00'	05.4
6	0.00'	01.4
7	0 00'	
8	0.00"	
	SUM	16.9
	MEAN	02 8
CORR FOR ECC.		
	DIRECTION	02.8

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION Boga COMPUTED BY L.S.H. DATE Nov. 18, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED				
	Coral	Teiteir	Engebi		
	INITIAL 0°-00'	293°-21'	311°-03'		
1	0.00"	25.0	59.0		
2	0.00"	25.9	57.1		
3	0.00"	24.0	54.7		
4	0.00"	23.2	54.5		
5	0.00"	26.2	58.9		
6	0.00"	23.8	53.7		
7	0.00'				
8	0.00"				
SUM		148.1	337.9		
MEAN		24.7	56.3		
CORR. FOR ECC.					
DIRECTION		24.7	56.3		

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS

ABSTRACT OF DIRECTIONS

STATION BOGA COMPUTED BY L.S.H. DATE Oct 31, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST Wild T-2

POSITION	STATIONS OBSERVED	
	Engebi	Photo
	INITIAL 0.00	55°-44'
1	0.00	09.3
2	0.00	10.6
3	0.00	04.7
4	0.00	07.2
5	0.00	11.5
6	0.00	02.7
7	0.00	
8	0.00	
	SUM	46.0
	MEAN	07.7
	CORR FOR ECC	
	DIRECTION	07.7

~~OFFICIAL USE ONLY~~

39

HOLMES & NARVER ENGINEERS JOB NO. 640

ABSTRACT OF DIRECTIONS

STATION BOKON COMPUTED BY L.S.H. DATE Nov. 22, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED					
	Aoman	Coral				
	INITIAL 0°-00'	62°-59'				
1	0.00"	26.2				
2	0.00"	25.3				
3	0.00"	25.7				
4	0.00"	23.1				
5	0.00"	23.9				
6	0.00"	24.1				
7	0.00"					
8	0.00"					
SUM		148.3				
MEAN		24.7				
CORR. FOR ECC.						
DIRECTION		24.7				

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION CORAL COMPUTED BY L.S.H. DATE Nov. 21, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED						
	North Base	Boga	Teiteir	Engebi	Bokon	Aoman	Piiraai
	INITIAL 0°-00'	234°-40'	253°-56'	268°-07'	279°-24'	309°-31'	326°-49'
1	0.00"	30.5	13.4	10.4	19.3	12.4	31.0
2	0.00"	33.5	11.5	07.4	23.5	09.1	27.5
3	0.00"	33.4	10.5	06.7	16.3	08.6	28.4
4	0.00"	34.6	15.8	11.0	18.7	10.0	28.6
5	0.00"	35.0	14.2	10.1	21.8	11.2	29.8
6	0.00"	33.2	11.3	06.9	16.9	09.4	30.3
7	0.00"						
8	0.00"						
SUM		200.2	76.7	52.5	116.5	60.7	175.6
MEAN		33.4	12.8	08.7	19.4	10.1	29.3
CORR. FOR ECC.							
DIRECTION		33.4	12.8	08.7	19.4	10.1	29.3

41

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION CORAL COMPUTED BY L.S.H. DATE Dec. 5, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED					
	North Base	Runit	Sand	Pinnacle	Parry	
	INITIAL 0°-00'	15°-48'	34°-01'	34°-35'	69°-02'	
1	0.00"	15.0	31.2	09.7	45.1	
2	0.00"	14.3	34.6	07.6	48.8	
3	0.00"	16.9	32.5	07.1	47.0	
4	0.00"	13.5	30.9	07.8	46.9	
5	0.00"	13.1	34.6	07.3	46.3	
6	0.00"	14.8	31.4	04.0	43.7	
7	0.00"					
8	0.00"					
SUM		87.6	195.2	43.5	277.8	
MEAN		14.6	32.5	07.2	46.3	
CORR. FOR ECC.						
DIRECTION		14.6	32.5	07.2	46.3	

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION CORAL COMPUTED BY L.S.H. DATE Dec. 14, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED					
	Parry	Aniyaanii				
	INITIAL 0°-00'	336°-51'				
1	0.00"	00.4				
2	0.00"	00.0				
3	0.00"	02.0				
4	0.00"	00.7				
5	0.00"	00.9				
6	0.00"	00.9				
7	0.00"					
8	0.00"					
	SUM	04.9				
	MEAN	00.8				
	CORR FOR ECC.					
	DIRECTION	00.8				

~~OFFICIAL USE ONLY~~

43

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION CORAL COMPUTED BY L.S.H. DATE Dec. 22, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED					
	Parry	Eniwetok				
	INITIAL 0°-00'	15°-00'				
1	0.00"	34.5				
2	0.00"	34.6				
3	0.00"	34.5				
4	0.00"	32.6				
5	0.00"	34.6				
6	0.00"	32.7				
7	0.00"					
8	0.00"					
SUM		203.5				
MEAN		33.9				
CORR. FOR ECC.		- 54.0"				
DIRECTION		14°-59'-39.9"				

44

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION ENGEBI COMPUTED BY L.S.H. DATE Nov. 17, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED					
	Coral	Teiteir	Aoman	North Base		
	INITIAL 0°-00'	120°-21'	315°-30'	332°-33'		
1	0.00"	31.8	03.4	44.3		
2	0.00"	32.6	01.0	48.3		
3	0.00"	28.6	00.7	44.0		
4	0.00"	30.0	00.0	43.8		
5	0.00"	30.8	02.8	48.4		
6	0.00"	28.0	00.2	43.2		
7	0.00"					
8	0.00"					
SUM		181.8	08.1	272.0		
MEAN		30.3	01.4 ~~01.35~~	45.3		
CORR. FOR ECC.						
DIRECTION		30.3	01.4	45.3		

43

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION ENGEBI COMPUTED BY L.S.H. DATE NOV. 28, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED					
	Coral	Photo	Boga			
	INITIAL 0°-00'	17°-01'	97°-37'			
1	0.00"	01.6	24.0			
2	0.00"	01.2	21.6			
3	0.00"	03.9	21.2			
4	0.00"	02.7	24.7			
5	0.00"	05.0	22.1			
6	0.00"	00.8	18.2			
7	0.00"					
8	0.00"					
SUM		15.2	131.8			
MEAN		02.5	22.0			
CORR. FOR ECC.						
DIRECTION		02.5	22.0			

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

DECLASSIFIED PER DOE LETTER DATED JULY, 15, 1994 FROM ANTON SERRECALLI TO EVANS S. NYBON

STATION ENIWETOK COMPUTED BY L.S.H. DATE Dec. 19, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED					
	Coral	Parry				
	INITIAL 0°-00'	47°-49'				
1	0.00"	20.2				
2	0.00"	20.3				
3	0.00"	24.6				
4	0.00"	20.4				
5	0.00"	22.2				
6	0.00"	27.0				
7	0.00"					
8	0.00"					
SUM		134.7				
MEAN		22.5				
CORR. FOR ECC.		- 5'-40.3"				
DIRECTION		47°-43'-42.2"				

47

~~OFFICIAL USE ONLY~~

41

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION Islet COMPUTED BY L.S.H. DATE Dec. 11, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED					
	Pinnacle	Runit				
	INITIAL 0°-00'	48°-33'				
1	0.00"	59.5				
2	0.00"	01.9				
3	0.00"	55.5				
4	0.00"	59.0				
5	0.00"	01.5				
6	0.00"	56.2				
7	0.00"					
8	0.00"					
SUM		353.6				
MEAN		58.9				
CORR. FOR ECC.						
DIRECTION		58.9				

48

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION *NORTH BASE* COMPUTED BY *L.S.H.* DATE *Dec. 3, 1949*

OBSERVER *F.P.C.* CHECKED BY *W.E.H.* INST. *Wild T-2*

POSITION	STATIONS OBSERVED					
	Coral	*Engebi*	*Runit*	*Pinnacle*		
	INITIAL *0°-00'*	*60°-40'*	*247°-45'*	*320°-23'*		
1	*0.00"*	*55.2*	*20.8*	*47.2*		
2	*0.00"*	*48.5*	*16.0*	*42.8*		
3	*0.00"*	*52.3*	*17.6*	*38.8*		
4	*0.00"*	*51.9*	*17.6*	*42.4*		
5	*0.00"*	*51.4*	*15.8*	*47.6*		
6	*0.00"*	*49.9*	*15.1*	*38.9*		
7	*0.00"*					
8	*0.00"*					
SUM		*309.2*	*102.9*	*257.7*		
MEAN		*51.5*	*17.2* ~~*17.15*~~	*43.0* ~~*42.95*~~		
CORR. FOR ECC.						
DIRECTION		*51.5*	*17.2*	*43.0*		

49

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION NORTH BASE COMPUTED BY L.S.H. DATE Oct. 28, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED					
	Coral	Aomon	Sand	Parry		
	INITIAL 0°-00'	81°-28'	252°-54'	274°-44'		
1	0.00"	08.8	51.0	03.5		
2	0.00"	04.8	50.2	59.2		
3	0.00"	04.6	46.7	58.3		
4	0.00"	05.6	49.2	00.3		
5	0.00"	04.4	50.7	00.3		
6	0.00"	04.5	47.1	56.4		
7	0.00"					
8	0.00"					
SUM		32.7	294.9	358.0		
MEAN		05.5 ~~05.45~~	49.1	59.7		
CORR. FOR ECC.						
DIRECTION		05.5	49.1	59.7		

50

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION *NORTH BASE* COMPUTED BY *L.S.H.* DATE *Nov. 30, 1949*

OBSERVER *F.P.C.* CHECKED BY *W.E.H.* INST. *Wild T-2*

POSITION	STATIONS OBSERVED					
	Coral	*Piiraai*				
	INITIAL *0°-00'*	*79°-53'*				
1	*0.00"*	*47.2*				
2	*0.00"*	*49.8*				
3	*0.00"*	*46.1*				
4	*0.00"*	*49.0*				
5	*0.00"*	*50.2*				
6	*0.00"*	*48.5*				
7	*0.00"*					
8	*0.00"*					
SUM		*290.8*				
MEAN		*48.5*				
CORR. FOR ECC.						
DIRECTION		*48.5*				

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION PARRY COMPUTED BY L.S.H. DATE Dec. 13, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED				
	Coral	North Base	Sand	Aniyaanii	Eniwetok
	INITIAL 0°-00'	25°-42	39°-44'	54°-56'	242°-43'
1	0.00"	16.0 ~~18.6~~	35.7	36.0	23.0
2	0.00"	14.0	35.8	32.1	24.3
3	0.00"	15.2	34.7	37.1	25.3
4	0.00"	10.6	33.9	35.5	18.9
5	0.00"	10.7	35.6	31.5	19.2
6	0.00"	14.8	35.9	34.0	24.9
7	0.00"				
8	0.00"				
SUM		81.3 ~~83.9~~	211.6	206.2	135.6
MEAN		13.5 ~~14.0~~	35.3	34.4	22.6
CORR. FOR ECC.					
DIRECTION		13.5	35.3	34.4	

~~OFFICIAL USE ONLY~~

52

15

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION PINNACLE COMPUTED BY L.S.H. DATE Dec. 2, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED					
	Coral	North Base	Runit	Islet		
	INITIAL 0°-00'	105°-48'	139°-57'	173°-14'		
1	0.00"	36.6	12.8	13.7		
2	0.00"	39.7	10.3	18.1		
3	0.00"	37.8	11.1	12.1		
4	0.00"	35.5	13.1	16.1		
5	0.00"	37.4	08.6	18.2		
6	0.00"	36.6	06.5	11.5		
7	0.00"					
8	0.00"					
SUM		223.6	62.4	89.7		
MEAN		37.3	10.4	14.95		
CORR. FOR ECC.						
DIRECTION		37.3	10.4	14.9		

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION PIIRAAI COMPUTED BY L.S.H. DATE Nov. 20, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED					
	Worth Base	Coral				
	INITIAL 0°-00'	66°-55'				
1	0.00"	44.5				
2	0.00"	39.1				
3	0 00'	39.9				
4	0.00'	41.9				
5	0.00'	37.8				
6	0 00'	38.8				
7	0 00"					
8	0.00'					
	SUM	242.0				
	MEAN	40.3				
	CORR. FOR ECC.					
	DIRECTION	40.3				

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION RUNIT COMPUTED BY L.S.H. DATE Dec. 4, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED					
	North Base	Islet	Pinnacle	Coral		
	INITIAL 0°-00'	188°-38'	286°-46'	308°-02'		
1	0.00"	03.6	03.6	57.3		
2	0.00"	02.3	59.5	00.3		
3	0.00"	59.8	54.2	53.9		
4	0.00"	01.8	59.3	54.1		
5	0.00"	03.0	57.6	59.5		
6	0.00"	00.9	57.0	52.3		
7	0.00"					
8	0.00"					
SUM		371.4	351.2	337.4		
MEAN		01.9	58.5	56.2		
CORR. FOR ECC.						
DIRECTION		01.9	58.5	56.2		

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION SAND COMPUTED BY L.S.H. DATE Dec. 6, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED					
	Parry	Coral	North Base			
	INITIAL 0°-00'	105°-14'	144°-07'			
1	0.00"	13.1	30.6			
2	0.00"	16.9	25.2			
3	0.00"	08.7	25.0			
4	0.00"	12.5	30.7			
5	0.00"	16.3	26.6			
6	0.00"	11.4	25.9			
7	0.00"					
8	0.00"					
SUM		78.9	164.0			
MEAN		13.15	27.3			
CORR. FOR ECC.						
DIRECTION		13.1	27.3			

~~OFFICIAL USE ONLY~~

56

5c

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

ABSTRACT OF DIRECTIONS

STATION TEITEIR COMPUTED BY L.S.H. DATE Nov. 27, 1949

OBSERVER F.P.C. CHECKED BY W.E.H. INST. Wild T-2

POSITION	STATIONS OBSERVED					
	Coral	Boga	Engebi			
	INITIAL 0°-00'	94°-03	314°-30'			
1	0.00"	48.0	31.3			
2	0.00"	50.3	26.9			
3	0.00"	47.5	31.1			
4	0.00"	46.0	24.6 ~~23.2~~			
5	0.00"	44.4 ~~50.5~~	29.3			
6	0.00"	48.9	27.3			
7	0.00"					
8	0.00"					
SUM		285.1	170.5			
MEAN		47.5	28.4			
CORR. FOR ECC.						
DIRECTION		47.5	28.4			

57

~~OFFICIAL USE ONLY~~

TRIANGLE COMPUTATIONS

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

COMPUTATION OF TRIANGLES

COMPUTED BY L.S.H. CHECKED BY L.M.P. DATE March 7, 1950

STATION	OBSERVED ANGLE	CORR-N	SPHERICL ANGLE	SPHERICL EXCESS	PLANE ANGLE AND DISTANCE	LOGARITHM
2-3					2591.9749	3.4136308
1 Pinnacle	34-08-33.1	-0.1	33.0	-0.0	33.0	0.2508413
2 North Base	72-38-25.8	-0.1	25.7	-0.0	25.7	9.9797538
3 Runit	73-13-01.5 / 00.4	-0.2 / 0.4	01.3	-0.0 / 0.0	01.3	9.9810958
1-3						3.6442259
1-2						3.6455679
2-3						3.6455679
1 Coral	34-35-07.2	-0.5	06.7	-0.0	06.7	0.2459339
2 North Base	39-36-17.0	-0.5	16.5	-0.0	16.5	9.8044704
3 Pinnacle	105-48-37.3 / 01.5	-0.4 / -1.4	36.9	-0.1 / -0.1	36.8	9.9832515
1-3						3.6959722
1-2						3.8747533
2-3						3.4136308
1 Coral	15-48-14.6	-0.4	14.2	-0.0	14.2	0.5648783
2 North Base	112-14-42.8	-0.4	42.4	-0.0	42.4	9.9664106
3 Runit	51-57-03.8 / 01.2	-0.4 / -1.2	03.4	-0.0 / 0.0	03.4	9.8962414
1-3						3.9449197
1-2						3.8747505
2-3						3.9449197
1 Pinnacle	139-57-10.4	-0.3	10.1	-0.0	10.1	0.1915065
2 Coral	18-46-52.6	-0.2	52.4	-0.0	52.4	9.5077958
3 Runit	21-15-57.7 / 0.7	-0.2 / -0.7	57.5	-0.0 / 0.0	57.5	9.5595450
1-3						3.6442220
1-2						3.6959712

60

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

COMPUTATION OF TRIANGLES

DECLASSIFIED PER DOE LETTER DATED JULY, 15, 1994 FROM ANTON SINISGALLI TO DIANE S. NIXON

COMPUTED BY L.S.H. CHECKED BY L.M.P. DATE March 7, 1950

STATION	OBSERVED ANGLE	CORR-N	SPHERICL ANGLE	SPHERICL EXCESS	PLANE ANGLE AND DISTANCE	LOGARITHM
2-3						3.8747533
1 Aoman	48-03-03.6	+ 0.3	03.9	- 0.0	03.9	0.1285782
2 North Base	81-28-05.5	+ 0.4	05.9	- 0.1	05.8	9.9951673
3 Coral	50-28-49.9 / 59.0	+ 0.4 / + 1.1	50.3	- 0.0 / - 0.1	50.3	9.8872850
1-3						3.9984988
1-2						3.8906165
2-3						3.9984988
1 Engebi	44-29-58.6	+ 0.6	59.2	- 0.1	59.1	0.1543401
2 Aoman	94-05-58.5	+ 0.6	59.1	- 0.1	59.0	9.9988873
3 Coral	41-24-01.4 / 58.5	+ 0.5 / + 1.7	01.9	- 0.0 / - 0.2	01.9	9.8204108
1-3						4.1517262
1-2						3.9732497
2-3						3.8747533
1 Engebi	27-26-14.7	+ 0.9	15.6	- 0.1	15.5	0.3365036
2 North Base	60-40-51.5	+ 0.9	52.4	- 0.1	52.3	9.9404709
3 Coral	91-52-51.3 / 57.5	+ 1.0 / + 2.8	52.3	- 0.1 / - 0.3	52.2	9.9997659
1-3						4.1517278
1-2						4.2110228
2-3						4.2110228
1 Aoman	142-09-02.1	+ 0.1	02.2	- 0.1	02.1	0.2121229
2 North Base	20-47-14.0	± 0.0	14.0	- 0.0	14.0	9.5501041
3 Engebi	17-03-43.9 / 00.0	± 0.0 / + 0.1	43.9	- 0.0 / - 0.1	43.9	9.4674744
1-3						3.9732498
1-2						3.8906201

~~OFFICIAL USE ONLY~~

61

HOLMES & NARVER ENGINEERS JOB No. 640

COMPUTATION OF TRIANGLES

COMPUTED BY L.S.H. CHECKED BY L.M.P. DATE March 7, 1950

STATION	OBSERVED ANGLE	CORR-N	SPHERICL ANGLE	SPHERICL EXCESS	PLANE ANGLE AND DISTANCE	LOGARITHM
2-3						4.1517262
1 Boga	48-56-03.7	- 0.2	03.5	- 0.1	03.4	0.1226537
2 Engebi	97-37-22.0	- 0.2	21.8	- 0.2	21.6	9.9961452
3 Coral	33-26-35.3	- 0.2	35.1	- 0.1	35.0	9.7412367
	01.0	- 0.6		- 0.4		
1-3						4.2705251
1-2						4.0156166
2-3						4.1517262
1 Teiteir	45-29-31.6	+ 0.7	32.3	- 0.0	32.3	0.1468152
2 Engebi	120-21-30.3	+ 0.9	31.2	- 0.1	31.1	9.9359497
3 Coral	14-08-55.9	+ 0.8	56.7	- 0.1	56.6	9.3881817
	57.8	+ 2.4		- 0.2		
1-3						4.2344911
1-2						3.6867231
2-3						4.2344911
1 Boga	66-38-35.3	- 0.6	34.7	- 0.1	34.6	0.0371327
2 Teiteir	94-03-47.5	- 0.7	46.8	- 0.1	46.7	9.9989072
3 Coral	19-17-39.4	- 0.6	38.8	- 0.1	38.7	9.5190623
	02.2	- 1.9		- 0.3		
1-3						4.2705310
1-2						3.7906861
2-3						4.0156166
1 Teiteir	139-33-19.1	+ 0.4	19.5	0.0	19.5	0.1879479
2 Engebi	22-44-08.3	+ 0.3	08.6	0.0	08.6	9.5871283
3 Boga	17-42-31.6	+ 0.3	31.9	0.0	31.9	9.4831312
	59.0	+ 1.0		0.0		
1-3						3.7906928
1-2						3.6866957

HOLMES & NARVER ENGINEERS JOB No. 640

COMPUTATION OF TRIANGLES

COMPUTED BY L.S.H. CHECKED BY L.M.P DATE March 8, 1950

STATION	OBSERVED ANGLE	CORR-N	SPHERICL ANGLE	SPHERICL EXCESS	PLANE ANGLE AND DISTANCE	LOGARITHM
2-3						3.8747533
1 Sand	38-53-14.2	+ 0.8	15.0	- 0.0	15.0	0.2021834
2 Coral	34-01-32.5	+ 0.8	33.3	- 0.0	33.3	9.7478528
3 North Base	107-05-10.9 / 57.6	+ 0.9 / + 2.5	11.8	- 0.1 / - 0.1	11.7	9.9803951
1-3						3.8247895
1-2						4.0573318
2-3						4.0573318
1 Parry	39-44-35.3	- 0.6	34.7	- 0.1	34.6	0.1942652
2 Coral	35-01-13.8	- 0.6	13.2	- 0.1	13.1	9.7588110
3 Sand	105-14-13.1 / 02.2	- 0.7 / - 1.9	12.4	- 0.1 / - 0.3	12.3	9.9844590
1-3						4.0104080
1-2						4.2360560
2-3						3.8747533
1 Parry	25-42-13.5	+ 0.1	13.6	- 0.1	13.5	0.3627925
2 Coral	69-02-46.3	+ 0.1	46.4	- 0.1	46.3	9.9702860
3 North Base	85-15-00.3 / 00.1	+ 0.0 / + 0.2	00.3	- 0.1 / - 0.3	00.2	9.9985058
1-3						4.2078318
1-2						4.2360516
2-3						4.2078318
1 Sand	144-07-27.3	+ 0.2	27.5	- 0.1	27.4	0.2320808
2 Parry	14-02-21.8	+ 0.1	21.9	- 0.0	21.9	9.3848717
3 North Base	21-50-10.6 / 59.7	+ 0.1 / + 0.4	10.7	- 0.0 / - 0.1	10.7	9.5704917
1-3						3.8247843
1-2						4.0104043

63

HOLMES & NARVER ENGINEERS JOB No. 640

COMPUTATION OF TRIANGLES

COMPUTED BY L.S.H. CHECKED BY L.M.P. DATE March 10, 1950

STATION	OBSERVED ANGLE	CORR-N	SPHERICL ANGLE	SPHERICL EXCESS	PLANE ANGLE AND DISTANCE	LOGARITHM	
2-3						3.9984988	
1 Bokon	62-59-24.7	+ 0.2	24.9	- 0.0	24.9	0.0501568	
2 Aoman	86-53-44.1	+ 0.3	44.4	- 0.1	44.3	9.9993622	
3 Coral	30-06-50.7 / 59.5	+ 0.1 / + 0.6	50.8	- 0.0 / - 0.1	50.8	9.7004647	Bokon
1-3						4.0480178	
1-2						3.7491203	
2-3						3.8747533	
1 Piiraqi	66-55-40.3	+ 0.2	40.5	- 0.0	40.5	0.0362062	
2 North Base	79-53-48.5	+ 0.3	48.8	- 0.1	48.7	9.9932129	
3 Coral	33-10-30.7 / 59.5	+ 0.1 / + 0.6	30.8	- 0.0 / - 0.1	30.8	9.7381472	Piiraqi
1-3						3.9041724	
1-2						3.6491067	
2-3						3.6442259	
1 Islet	48-33-58.9	0.0	58.9	0.0	58.9	0.1250993	
2 Pinnacle	33-17-04.5	0.0	04.5	0.0	04.5	9.7394124	
3 Runit	98-08-56.6 / 00.0	0.0 / 0.0	56.6	0.0 / 0.0	56.6	9.9955925	Islet
1-3						3.5087376	
1-2						3.7649177	
2-3						4.2360559	
1 Aniyaanii	101-54-26.6	- 0.0	26.6	- 0.1	26.5	0.0094470	
2 Parry	54-56-34.4	- 0.0	34.4	- 0.1	34.3	9.9130610	
3 Coral	23-08-59.2 / 00.2	- 0.0 / - 0.0	59.2	- 0.0 / - 02	59.2	9.5945430	Aniyaanii
1-3						4.1585639	
1-2						3.8400459	

64

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB NO. 1846

COMPUTATION OF TRIANGLES

COMPUTED BY L.S.H. CHECKED BY L.M.P. DATE March 11, 1950

STATION	OBSERVED ANGLE	CORR-N	SPHERICL ANGLE	SPHERICL EXCESS	PLANE ANGLE AND DISTANCE	LOGARITHM
2-3						4.2360560
1 Eniwetok	47-43-42.2	+ 0.6	42.8	0.1 -~~1.0~~	42.7	0.1307881
2 Coral	14-59-39.5	+ ~~0.5~~ 0.4	40.0 39.9	- 0.0	39.9	9.4128382
3 Parry	117-16-37.4	+ 0.1	37.5	0.1 -~~1.0~~	37.4	9.9488044
	59.1	+ 1.2		- 2.0		
1-3						3.7796823
1-2						4.3156485
2-3						
1						
2						
3						
1-3						
1-2						
2-3						
1						
2						
3						
1-3						
1-2						
2-3						
1						
2						
3						
1-3						
1-2						

Eniwetok

HOLMES & NARVER ENGINEERS JOB No. 640

COMPUTATION OF TRIANGLES

COMPUTED BY L.S.H. CHECKED BY L.M.P DATE March 11, 1950

STATION	OBSERVED ANGLE	CORR-N	SPHERICL ANGLE	SPHERICL EXCESS	PLANE ANGLE AND DISTANCE	LOGARITHM	
2-3						3.9732498	
1 Photo	46-12-03.1	- 0.9	02.2	- 0.1	02.1	0.1416029	
2 Engebi	61-31-01.2	+ 0.1	01.3	- 0.1	01.2	9.9439685	Photo
3 Aoman	72-16-55.7 / 00.0	+ 1.1	56.8	- 0.1	56.7	9.9788961	
		+ 0.3		- 0.3			
1-3						4.0588211	
1-2						4.0937487	
2-3						4.0156166	
1 Photo	43-39-32.7	+ 1.1	33.8	- 0.1	33.7	0.1609184	
2 Boga	55-44-07.7	- 0.9	06.8	- 0.1	06.7	9.9172136	Photo
3 Engebi	80-36-19.6 / 00.0	+ 0.1	19.7	- 0.1	19.6	9.9941357	
		+ 0.3		- 0.3			
1-3						4.0937486	
1-2						4.1706707	
2-3							
1							
2							
3							
1-3							
1-2							
2-3							
1							
2							
3							
1-3							
1-2							

CHECK COMPUTATION OF THE JOINT TASK FORCE SEVEN SURVEY TO DETERMINE THE AZIMUTH OF THE BASE LINE NORTH BASE-RUNIT OF THAT SURVEY,

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

2 to 3					α	3 to 2				
B					3d ∠	B				
North Base to Sand	327	56	52.40		α	3 to 1				
		+00	23.38		Δα					
	180	00	00.0						180	00 00.0
Sand to North Base	147	57	15.78		α'	1 to 3				

FIRST ANGLE OF TRIANGLE

11 33 23.265	North Base	λ	162	21	09.890	φ			3	λ
- 3 04.284		Δλ		+ 1	56.983	Δφ				Δλ
11 30 18.981	Sand	λ'	162	23	06.873	φ'			1	λ'

Logarithms	Values in seconds				Logarithms	Values in seconds		Logarithms	Values in seconds
3.8247980		½(φ+φ')	11 - 31 - 51.123		s			-½(φ+φ)	
9.9281739			Logarithms	Values in seconds	Cos α				
8.5124992		s	3.8247980		B			s	
2.2654711	1st term +184.2770	Sin α	9.7248412		h		1st term	Sin α	
7.6495960		A'	8.5096676		s²			A'	
9.4496824		Sec φ'	0.0088155		Sin²α			Sec φ'	
0.71736		Δλ	2.0681223	+116.9829	C			Δλ	
7.8166384	2d term + 0.0066	Sin ½(φ+φ')	9.3008037				2d term +	Sin ½(φ+φ')	
4.5309422		-Δφ	1.3689260	-23.3834	n'			-Δφ	
1.9851		NOTE: Position of North Base U.S.N. 1944 and azimuth of North Base U.S.N. to Sand U.S.N. has been held fixed in these computations.			D				
6.5160422	3d term + 0.0003						3d term +		
	-Δφ +184.2839						-Δφ		

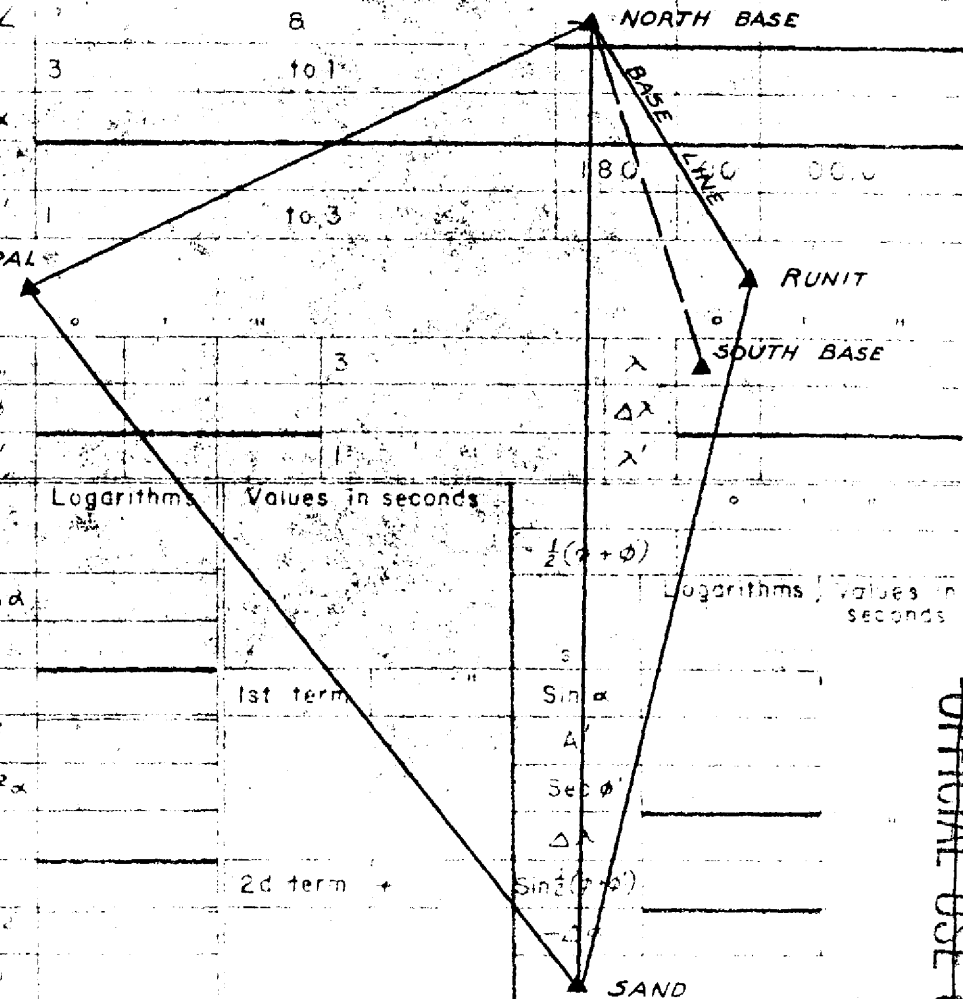

Check computation of Task Force Seven Survey

69

2

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

		°	'	"			°	'	"
	2 North Base to 3 Sand	327	56	52.40	α	3 Sand to 2 North Base	147	57	15.78
∠	8	+107	05	20.48	3d ∠	8	-38	53	11.73
	2 North Base to 1 Coral	75	02	12.88	α	3 Sand to 1 Coral	109	04	04.05
			-00	47.84	Δα			-01	11.10
		180	00	00.0			180	00	00.0
α'	1 Coral to 2 North Base	255	01	25.04	α'	1 Coral to 3 Sand	289	02	52.95

FIRST ANGLE OF TRIANGLE

	°	'	"			°	'	"			°	'	"			°	'	"
φ	11	33	23.265	2 North Base	λ	162	21	09.890	φ	11	30	18.981	3 Sand	λ	162	23	06.873	
Δφ		-1	03.010		Δλ		-3	58.959	Δφ		+2	01.274		Δλ		-5	55.942	
φ'	11	32	20.255	1 Coral	λ'	162	17	10.931	φ'	11	32	20.255	1 Coral	λ'	162	17	10.931	

	Logarithms	Values in seconds			° ' "	Logarithms	Values in seconds
	3.8747701			½(φ+φ')	11 -32-51.760		
Cos α	9.4119507				Logarithms	Values in seconds	
B	8.5124992		s		3.8747701		
h	1.7992200	1st term	Sin α		9.9850186	+62.9825	
s²	7.7495402		A'		8.5096676		
Sin²α	9.9700372		Sec φ'		0.0088675		
C	0.7173600		Δλ		2.3783238	-238.9592	
	8.4369374	2d term	Sin½(φ+φ')		9.3014290	+ 0.0274	
h²	3.5984400		-Δα		1.6797528	+47.836	
D	1.9850000						
	5.5834400	3d term				+ 0.0000	
		-Δφ				+63.0099	

	Logarithms	Values in seconds			° ' "	Logarithms	Values in seconds
s	4.0573516			½(φ+φ')	11 -31-19.618		
Cos α	9.5141314				Logarithms	Values in seconds	
B	8.5125007		s		4.0573516		
h	2.0839837	1st term	Sin α		9.9754928	-121.3342	
s²	8.1147032		A'		8.5096677		
Sin²α	9.9509856		Sec φ'		0.0088675		
C	0.7153800		Δλ		2.5513796	-355.9446	
	8.7810688	2d term	Sin½(φ+φ')		9.3004785	+ 0.0604	
h²	4.1679674		-Δα		1.8518581	+ 71.098	
D	1.9833000						
	6.1512674	3d term				+ 0.0001	
		-Δφ				-121.2737	

Check computation of Task Force Seven Survey

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

2 Coral	to 3 North Base	255	01	25.04	α	3 North Base	to 2 Coral	75	02	12.88
	&	+ 15	48	09.52	3rd $\angle$		&	-112	14	55.77
Coral	to 1 Runit	270	49	34.56	α	3 North Base	to 1 Runit	322.	47	17.11
			+ 0	58.14	$\Delta\alpha$			.	+ 0	10.36
		180	00	00.0				180	00	00.0
1 Runit	to 2 Coral	90	50	32.70	α'	1 Runit	to 3 North Base	142	47	27.4X 6

FIRST ANGLE OF TRIANGLE

11	32	20.255	2 Coral		λ	162	17	10.931	ϕ	11	33	23.265	3 North Base	λ	162	21	09.890
	-0	04.175			$\Delta\lambda$		+ 4	50.690	$\Delta\phi$		-1	07.185		$\Delta\lambda$		+ 0	51.731
11	32	16.080	1 Runit		λ'	162	22	01.621	ϕ'	11	32	16.080	1 Runit	λ'	162	22	01.621

Logarithms	Values in seconds																
3.9449421			$\frac{1}{2}(\phi+\phi')$	11 - 32 - 18.17		s	3.4136298			$\frac{1}{2}(\phi+\phi')$	11 - 32 - 49.67					
8.1589826				Logarithms	Values in seconds	Cos α	9.9011336				Logarithms	Values in seconds				
8.5124997			s	3.9449421		B	8.5124992			s	3.4136298					
0.6164244	1st term	+4.1345	Sin α	9.9999548		h	1.8272626	1st term	+67.1835	Sin α	9.7815864					
7.88988			A'	8.5096677		s^2	6.82726			A'	8.5096676					
9.99991			Sec ϕ'	0.0088657		$\sin^2$	9.56317			Sec ϕ'	0.0088660					
0.71669			$\Delta\lambda$	2.4634303	+290.6900	C	0.71800			$\Delta\lambda$	1.7137498	+51.7309				
8.60648	2d term	+0.0404	Sin $\frac{1}{2}(\phi+\phi')$	9.3010828			7.10843	2d term	+0.0013	Sin $\frac{1}{2}(\phi+\phi')$	9.3014075					
1.23285			$-\Delta\alpha$	1.7645131	-58.145	s^2	3.65453			$-\Delta\alpha$	1.0151573	-10.355				
1.98450						L	1.98510									
3.21735	3d term	+0.0000					5.63963	3d term	+0.0000							
	$-\Delta\phi$	+4.1749						$-\Delta\phi$	+67.1848							

Check computation of Task Force Seven Survey

GEOGRAPHIC POSITION COMPUTATIONS

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

	2 Runit	to 3 Coral	90	50	32.7	α	3	to 2						
	&		+51	57	03.4	3rd $\angle$	&		–					
	2 Runit	to North Base	142	47	36.1	α	3	to 1						
				–	10.4	$\Delta\alpha$								
			180	00	00.0							180	00	00.0
	North Base	to 2 Runit	322	47	25.7	α'	1	to 3						

FIRST ANGLE OF TRIANGLE

ϕ	11	32	16.080	2 Runit	λ	162	22	01.621	ϕ			3	λ	
$\Delta\phi$	+ 1	07.187			$\Delta\lambda$		– 51.728		$\Delta\phi$				$\Delta\lambda$	
ϕ'	11	33	23.267	North Base	λ'	162	21	09.893	ϕ'				λ'	

	Logarithms	Values in seconds					Logarithms	Values in seconds			Logarithms	Values in seconds
s	3.4136308		$\frac{1}{2}(\phi+\phi')$	11° – 32 – 49.675		s				$\frac{1}{2}(\phi+\phi')$		
Cos α	9.9011639			Logarithms	Values in seconds	Cos α					Logarithms	Values in seconds
b	8.5125002		s	3.4136308		B				s		
h	1.8272949	1st term –67.1885	Sin α	9.7815338		h		1st term		Sin α		
s^2	6.82726		A'	8.5096678		s^2				A'		
$\sin^2\alpha$	9.56307		Sec ϕ'	0.0088946		$\sin^2\alpha$				Sec ϕ'		
C	0.71656		$\Delta\lambda$	1.7137270	–51.728	C				$\Delta\lambda$		
	7.10689	2d term + .0013	$\sin\frac{1}{2}(\phi-\phi')$	9.3014076				2d term	+	$\sin\frac{1}{2}(\phi-\phi')$		
h^2	3.6546		$-\Delta\alpha$	1.0151043	+10.355	h^2				$-\Delta\alpha$		
D	1.9845					D						
	5.6391	3d term + .0000						3d term	+			
		$-\Delta\phi$ –67.1872						$-\Delta\phi$				

73

22

FROM ANTON CINISGALLI TO
DIANE S. NIXON

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

	2 North Base to 3 Runit			322	47	25.7		3 Runit to 2 North Base			142	47	36.1
∠	B			+ 72	38	25.7	3rd ∠	B			- 73	13	01.3
	North Base to 1 Pinnacle			35	25	51.4		3 Runit to 1 Pinnacle			69	34	34.8
					-	16.9	Δ					-	27.3
				180	00	00.0					180	00	00.0
	Pinnacle to 2 North Base			215	25	34.5		1 Pinnacle to 3 Runit			249	34	07.5

FIRST ANGLE OF TRIANGLE 34 - 08 - 33.0

φ	11	33	23.267	2 North Base	λ	162	21	09.893	φ	11	32	16.080	3 Runit	λ	162	22	01.621
Δφ		- 1	57.257		Δλ		- 1	24.586	Δφ		- 0	50.070		Δλ		- 2	16.314
φ'	11	31	26.010	1 Pinnacle	λ'	162	19	45.307	φ'	11	31	26.010	Pinnacle	λ'	162	19	45.307

	Logarithms	Values in seconds					Logarithms	Values in seconds			Logarithms	Values in seconds
	3.6455679		½(φ+φ')	11 - 32 - 29.638		s	3.6442259		½(φ+φ)	11 - 31 - 51.045		
Cos α	9.9110599			Logarithms	Values in seconds	Cos λ	9.5427746				Logarithms	Values in seconds
B	8.5124992		s	3.6455679		B	8.5124998				s 3.6442259	
h	2.069/270	1st term +117.2538	Sin α	9.7632192		h	1.6995003	1st term +50.0611			Sin α 9.9718035	
s²	7.29114		A'	8.5096676		s²	7.28845				A' 8.5096678	
Sin² α	9.52644		Sec φ'	0.0088442		Sin² λ	9.94361				Sec φ' 0.0088442	
C	0.71736		Δλ	1.9272989	-84.586	C	0.71664				Δλ 2.1345414	-136.314
	7.53494	2d term + .0034	Sin ½(φ-φ')	9.3005820			7.94860	2d term + .0089			Sin ½(φ-φ) 9.3008029	
h²	4.1382		-Δφ	1.2278809	+16.900	h²	3.3990				-Δφ 1.4353443	+ 27.258
D	1.9847					D	1.9845					
	6.1229	3d term + .0001					5.3835	3d term + .0000				
		-Δφ +117.2573						-Δφ +50.0700				

LETTER ACCOMPANYING REPORT
FROM ANTON SINISGALLI TO
DIANE S. NIXON

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

	2 North Base to 3 Pinnacle		35	25	51.4	α	3 Pinnacle to 2 North Base		215	25	34.5
	B		+39	36	16.5	3rd $\angle$	B		-105	49	36.9
	2 North Base to 1 Coral		75	02	07.9	α	3 Pinnacle to 1 Coral		109	36	57.6
				-	47.8	$\Delta\alpha$				—	30.8
			180	00	00.0				180	00	00.0
	1 Coral to 2 North Base		255	01	20.1	α'	1 Coral to 3 Pinnacle		289	36	26.8

FIRST ANGLE OF TRIANGLE 34 - 35 - 06.7

	11 33 23.267	2 North Base	λ	162	21	09.893	ϕ	11 31 26.010	3 Pinnacle	λ	162	19	45.307
$\Delta\phi$	- 1 03.013		$\Delta\lambda$		- 3	58.949	$\Delta\phi$	+ 54.244		$\Delta\lambda$		- 2	34.363
ϕ'	11 32 20.254	1 Coral	λ'	162	17	10.944	ϕ'	11 32 20.254	1 Coral	λ'	162	17	10.944

	Logarithms	Values in seconds					Logarithms	Values in seconds				
c	3.8747533		$\frac{1}{2}(\phi+\phi')$	11 - 32 - 51.760		s	3.6959722			$\frac{1}{2}(\phi+\phi')$	11 - 31 - 23.132	
Cos α	9.4119899			Logarithms	Values in seconds	Cos α	9.5259702				Logarithms	Values in seconds
B	8.5124996		s	3.8747533		B	8.5125006			s	3.6959722	
h	1.7992428	1st term +62.9858	Sin α	9.9850158		h	1.7344430	1st term -54.2555		Sin α	9.9740342	
s^2	7.74951		A'	8.5096676		s^2	7.39194			A'	8.5096679	
$\sin^2\alpha$	9.97003		Sec ϕ'	0.0088685		$\sin^2\alpha$	9.94807			Sec ϕ'	0.0088685	
C	0.71736		$\Delta\lambda$	2.3783052	-238.949	C	0.71610			$\Delta\lambda$	2.1885428	-154.363
	8.43690	2d term + .0273	$\sin\frac{1}{2}(\phi+\phi')$	9.3014290			8.05611	2d term + .0114		$\sin\frac{1}{2}(\phi+\phi')$	9.3005148	
n^2	3.5985		$-\Delta\alpha$	1.6797342	+47.834	n^2	3.4689			$-\Delta\alpha$	1.4890576	+30.765
D	1.9851					D	1.9839					
	5.5836	3d term + .0000					5.4528	3d term + .0000				
		$-\Delta\phi$ +63.0126						$-\Delta\phi$ -54.2441				

75
43

OFFICIAL USE ONLY

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

α	2 North Base to 3 Coral	75	02	07.9	α	3 Coral	to 2 North Base	255	01	20.1
3d ∠	8	+ 81	28	05.9	3d ∠	8		- 50	28	50.3
α	2 North Base to 1 Aoman	156	30	13.8	α	3 Coral	to 1 Aoman	204	32	29.8
Δα			-	20.6	Δα				+	27.4
		180	00	00.0				180	00	00.0
α'	1 Aoman to 2 North Base	336	29	53.3	α'	1 Aoman	to 3 Coral	24	32	57.2

FIRST ANGLE OF TRIANGLE 48-03-03.9

φ	11	33	23.267	2 North Base	λ	162	21	09.893	φ	11	32	20.254	3 Coral	λ	162	17	10.944
Δφ		+ 3	52.015		Δλ		- 1	42.309	Δφ		+ 4	55.028		Δλ		+ 2	16.641
φ'	11	37	15.282	1 Aoman	λ'	162	19	27.584	φ'	11	37	15.282	1 Aoman	λ'	162	19	27.584

	Logarithms	Values in seconds						Logarithms	Values in seconds				Logarithms	Values in seconds
s	3.8906165			½(φ+φ')	11 - 35 - 19.275			s	3.9984988			½(φ+φ')	11 - 34 - 47.768	
Cos α	9.9624104				Logarithms	Values in seconds		Cos α	9.9588790				Logarithms	Values in seconds
B	8.5124992			s	3.8906165			B	8.5124997			s	3.9984988	
h	2.3655261	1st term	-232.0204	Sin α	9.6006329			h	2.4698775	1st term	-295.0377	Sin α	9.6184184	
s²	7.78123			A'	8.5096676			s²	7.99700			A'	8.5096678	
Sin² α	9.20127			Sec φ'	0.0089948			Sin² α	9.23684			Sec φ'	0.0089948	
C	0.71736			Δλ	2.0099118	-102.3085		C	0.71669			Δλ	2.1355798	+136.6402
	7.69986	2d term	+ .0050	Sin ½(φ+φ')	9.3029465				7.95053	2d term	+ .0089	Sin ½(φ-φ')	9.3026229	
h²	4.7311			-Δα	1.3128583	+ 20.552		h²	4.9398			-Δα	1.4382027	- 27.429
D	1.9851							D	1.9845					
	6.7162	3d term	+ .0005						6.9243	3d term	+ .0008			
		-Δφ	-232.0149							-Δφ	-295.0280			

OFFICIAL USE ONLY

72

69

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

			°	'	"
α	2 Aoman	to 3 Coral	24	32	57.2
3d ∠	B		+ 94	05	59.1
α	2 Aoman	to 1 Engebi	118	38	56.3
Δ α				−	55.0
			180	0.0	00.0
α'	1 Engebi	to 2 Aoman	298	38	01.3

			°	'	"
α	3 Coral	to 2 Aoman	204	32	29.8
3d ∠	B		− 41	24	01.9
α	3 Coral	to 1 Engebi	163	08	27.9
Δ α				−	27.3
			180	00	00.0
α'	1 Engebi	to 3 Coral	343	08	00.5

FIRST ANGLE OF TRIANGLE = 44 − 29 − 59.2

	°	'	"		°	'	"
φ	11	37	15.282 2 Aoman	λ	162	19	27.584
Δ φ	+ 2	26.682		Δ λ		− 4	32.432
φ'	11	39	41.964 1 Engebi	λ'	162	14	55.152

	°	'	"		°	'	"
φ	11	32	20.254 3 Coral	λ	162	17	10.944
Δ φ	+ 7		21.710	Δ λ		− 2	15.792
φ'	11	39	41.964 1 Engebi	λ'	162	14	55.152

	Logarithms	Values in seconds		
s	3.9732497			
Cos α	9.6807361			
B	8.5124972			
h	2.1664830	1st term	−146.7179	
	7.94650			
Sin² α	9.88657			
c	0.71984			
	8.55291	2d term	+ .0357	
h²	4.3330			
D	1.9875			
	6.3205	3d term	+ .0002	
		− Δ φ	−146.6820	

½(φ+φ')	11 − 38 − 28.623		
	Logarithms	Values in seconds	
s	3.9732497		
Sin α	9.9432835		
A'	8.5096669		
Sec φ'	0.0090584		
Δ λ	2.4352585	−272.4322	
Sin ½(φ+φ')	9.3048860		
− Δ α	1.7401445	+ 54.972	

	Logarithms	Values in seconds		
s	4.1517262			
Cos α	9.9809219			
B	8.5124997			
h	2.6451478	1st term	−441.7207	
s²	8.30345			
Sin² α	8.92484			
C	0.71669			
	7.94498	2d term	+ .0088	
h²	5.2903			
D	1.9845			
	7.2748	3d term	+ .0019	
		− Δ φ	−441.7100	

½(φ+φ')	11 − 36 − 01.109		
	Logarithms	Values in seconds	
s	4.1517262		
Sin α	9.4624220		
A'	8.5096678		
Sec φ'	0.0090584		
Δ λ	2.1328744	−135.792	
Sin ½(φ+φ')	9.3033758		
− Δ α	1.4362502	+ 27.306	

77

70

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

	2 Engebi	to 3 Coral	343	08	00.5		3 Coral	to 2 Engebi	163	08	27.9				
		B	+ 97	37	21.8	3rd ∠		B	- 33	26	35.1				
	2 Engebi	to 1 Boga	80	45	22.3	α	3 Coral	to 1 Boga	129	41	52.8				
				- 1	08.2	Δα				- 1	35.2				
			180	00	00.0				180	00	00.0				
	1 Boga	to Engebi	260	44	14.1	α'	1 Boga	to 3 Coral	309	40	17.6				

FIRST ANGLE OF TRIANGLE 48-56-03.5

s	11 39 41.964	2 Engebi	λ	162	14	55.152	φ	11	32	20.254	3 Coral	λ	162	17	10.944
Δφ	- 54.250		Δλ		- 5	37.786	Δφ		+ 6	27.461		Δλ		- 7	53.579
φ'	11 38 47.71⅝	1 Boga	λ'	162	09	17.366	φ'	11	38	47.7715	1 Boga	λ'	162	09	17.365

Logarithms	Values in seconds				Logarithms	Values in seconds				Logarithms	Values in seconds
s 4.0156166		½(φ+φ')	11 - 39 - 14.840		s 4.2705251				½(φ+φ')	11 - 35 - 33.984	
Cos α 9.2058438			Logarithms	Values in seconds	Cos α 9.8053248					Logarithms	Values in seconds
B 8.5124960		s	4.0156166		B 8.5124997				s	4.2705251	
h 1.7339564	1st term +54.1948	Sin α	9.9943231		h 2.5883496	1st term -387.5695			Sin α	9.8861645	
s² 8.03123		A'	8.5096665		s² 8.54105				A'	8.5096678	
Sin²α 9.98865		Sec φ'	0.0090348		Sin²α 9.77233				Sec φ'	0.0090348	
C 0.72139		Δλ	2.5286410	-337.7855	C 0.71669				Δλ	2.6753922	-473.5786
8.74127	2d term + .0551	Sin½(φ+φ')	9.3053581		9.03007	2d term + .1072			Sin½(φ+φ')	9.3030975	
n² 3.4679		-Δα	1.8339991	+ 68.233	n² 5.1767				-Δα	1.9784897	+ 95.168
D 1.9888					D 1.9845						
5.4567	3d term + .0000				7.1612	3d term + .0016					
	-Δφ +54.2499					-Δφ -387.4607					

OFFICIAL USE ONLY

OFFICIAL USE ONLY

78

71

LETTER DATED 30 JULY, 1951 FROM ENZIO SINISGALLI TO DENNIS S. NIXON

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

OFFICIAL USE ONLY

	2 Engebi	to 3 Coral	343	08	00.5	α	3 Coral	to 2 Engebi	163	08	27.9						
$\angle$		B	+120	21	31.2	$\angle$		B	-14	08	56.7						
	2 Engebi	to 1 Teiteir	103	29	31.7	α	3 Coral	to 1 Teiteir	148	59	31.2						
				-	31.6	$\Delta\alpha$				-	58.7						
			180	00	00.0				180	00	00.0						
	1 Teiteir	to 2 Engebi	283	29	00.1	α'	1 Teiteir	to 3 Coral	328	58	32.5/4						

FIRST ANGLE OF TRIANGLE 45-29-32.3

ϕ	11 39 41.964	2 Engebi	λ	162	14	55.152	ϕ	11	32	20.254	3 Coral	λ	162	17	10.944		
$\Delta\phi$	+ 36.899		$\Delta\lambda$		- 2	36.066	$\Delta\phi$		+ 7	58.609		$\Delta\lambda$		- 4	51.859		
ϕ'	11 40 18.863	1 Teiteir	λ'	162	12	19.086	ϕ'	11	40	18.863	1 Teiteir	λ'	162	12	19.085/6		

	Logarithms	Values in seconds					Logarithms	Values in seconds			Logarithms	Values in seconds
s	3.6867231		$\frac{1}{2}(\phi+\phi')$	11-40-00.414		s'	4.2344911		$\frac{1}{2}(\phi+\phi')$	11-36-19.564		
Cos α	9.3679370			Logarithms	Values in seconds	Cos α	9.9330291			Logarithms	Values in seconds	
b	8.5124960		s'	3.6867231		B	8.5124997		s	4.2344911		
h	1.5671561	1st term -36.9110	Sin α	9.9878430		h	2.6800199	1st term -478.6520	Sin α	9.7119402		
s^2	7.37345		A'	8.5096665		s^2	8.46898		- A'	8.5096678		
$\sin^2\alpha$	9.97569		Sec ϕ'	0.0090744		$\sin^2\alpha$	9.42388		Sec ϕ'	0.0090744		
C	0.72139		$\Delta\lambda$	2.1933070	-156.0655	C	0.71669		$\Delta\lambda$	2.4651735	-291.8592	
	8.07053	2d term + .0118	$\sin\frac{1}{2}(\phi+\phi')$	9.3058231			8.60955	2d term + .0407	$\sin\frac{1}{2}(\phi+\phi')$	9.3035650		
h^2	3.1343		$-\Delta\alpha$	1.4991301	+31.559	h^2	5.3600		$-\Delta\alpha$	1.7687385	+ 58.714	
D	1.9888					D	1.9845					
	5.1231	3d term + .0000					7.3445	3d term + .0022				
		$-\Delta\phi$ -36.8992						$-\Delta\phi$ -478.6091				

OFFICIAL USE ONLY

29

72

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

			°	′	″				°	′	″
∠	2 Coral	to 3 North Base	255	01	20.1	∠	3 North Base	to 2 Coral	75	02	07.9
			+ 34	01	33.3	3rd ∠			-107	05	11.8
∠	Coral	to 1 Sand	289	02	53.4	∠	3 North Base	to 1 Sand	327	56	56.1
Δ∠				+1	11.1	Δ∠				+	23.4
			180	00	00.0				180	00	00.0
∠′	1 Sand	to 2 Coral	109	04	04.5	∠′	1 Sand	to 3 North Base	147	57	19.5

FIRST ANGLE OF TRIANGLE 38-53-15.0

	°	′	″			°	′	″			°	′	″			°	′	″
φ	11	32	20.254	2 Coral	λ	162	17	10.944	φ	11	33	23.267	3 North Base	λ	162	21	09.893	
Δφ		-2	01.269		Δλ		+5	55.926	Δφ		-3	04.282		Δλ		+1	56.977	
φ′	11	30	18.985	1 Sand	λ′	162	23	06.870	φ′	11	30	18.985	1 Sand	λ′	162	23	06.870	

	Logarithms	Values in seconds		
s	4.0573318			
Cos α	9.5137013			
B	8.5124997			
h	2.0835328	1st term	+121.2084	
s²	8.11466			
Sin² α	9.95109			
C	0.71669			
	8.78244	2d term	+ .0606	
h²	4.1671			
D	1.9845			
	6.1516	3d term	+ .0001	
		-Δφ	+121.2691	

	°	′	″			
½(φ+φ′)	11	31	19.620			
	Logarithms	Values in seconds				
s	4.0573318					
Sin α	9.9755442					
A′	8.5096677					
Sec φ′	0.0088155					
Δλ	2.5513592	+355.9256				
Sin ½(φ+φ′)	9.3004785					
-Δα	1.8518377	-71.095				

	Logarithms	Values in seconds		
s	3.8247895			
Cos α	9.9281783			
B	8.5124992			
h	2.2654670	1st term	+184.2753	
s²	7.64958			
Sin² α	9.44966			
C	0.71733			
	7.81657	2d term	+ .0066	
h²	4.5309			
D	1.9851			
	6.5160	3d term	+ .0003	
		-Δφ	+184.2822	

	°	′	″			
½(φ+φ′)	11	31	51.126			
	Logarithms	Values in seconds				
s	3.8247895					
Sin α	9.7248287					
A′	8.5096676					
Sec φ′	0.0088155					
Δλ	2.0681013	+116.9772				
Sin ½(φ+φ′)	9.3008037					
-Δα	1.3689050	-23.383				

28

73

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

	2 Coral	to 3 Sand	°	'	"		3 Sand	to 2 Coral	°	'	"						
		&	289	02	53.4	α		&	109	04	04.5						
			+ 35	01	13.2	3d ∠			-105	14	12.4						
	2 Coral	to 1 Parry	324	04	06.6	α	3 Sand	to 1 Parry	3	49	52.1						
				+1	06.3	Δα				-	04.5						
			180	00	00.0				180	00	00.0						
	1 Parry	to 2 Coral	144	05	19.0	α'	1 Parry	to 3 Sand	183	49	47.6						

FIRST ANGLE OF TRIANGLE 39 -44 -34.6

φ	11	32	20.254	2 Coral	λ	162	17	10.944	φ	11	30	18.985	3 Sand	λ	162	23	06.870
Δφ		-7	33.882		Δλ		-5	33.350	Δφ		-5	32.613		Δλ		-	22.575
φ'	11	24	46.372	1 Parry	λ'	162	22	44.294	φ'	11	24	46.372	1 Parry	λ'	162	22	44.295

	Logarithms	Values in seconds					Logarithms	Values in seconds					Logarithms	Values in seconds		
s	4.2360560			½(φ+φ')	11 -28 -33.313		s	4.0104080			½(φ+φ)	11 -27 -32.628			
Cos α	9.9083344				Logarithms	Values in seconds	Cos α	9.9990284				Logarithms	Values in seconds		
B	8.5124997			s	4.2360560		B	8.5125007			s	4.0104080			
h	2.6568901	1st term	+453.8267	Sin α	9.7685032		h	2.5219371	1st term	+332.6114	Sin α	8.8248816			
s²	8.47211			A'	8.5096677		s²	8.02082			A'	8.5096681			
Sin² α	9.53701			Sec φ'	0.0086735		Sin² α	7.64976			Sec φ'	0.0086735			
C	0.71669			Δλ	2.5229009	-333.3503	C	0.71538			Δλ	1.3536312	-22.5732		
	8.72581	2d term	+ .0532	Sin ½(φ+φ')	9.2987573			6.38596	2d term	+ .0002	Sin ½(φ-φ')	9.2981279			
h²	5.3138			-Δα	1.8216582	- 66.322	h²	5.0439			-Δα	0.6517591	+ 4.485		
D	1.9845						D	1.9832							
	7.2983	3d term	+ .0020					7.0271	3d term	+ .0011					
		-Δφ	+453.8819						-Δφ	+332.6127					

LETTER DATED JULY 1 FROM ANTON SYNNATZSCHKE TO DIANE S. NIXON

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

2 Parry	to 3 Coral		144	05	13.0		α	3 Coral	to 2 Parry		324	04	06.6				
	&		+54	56	34.4		3d ∠		&		-23	08	59.2				
2 Parry	to 1 Aniyaanii		199	01	47.4		α	3 Coral	to 1 Aniyaanii		300	55	07.4				
				+	14.8		Δα					+1	21.3				
			180	00	00.0						180	00	00.0				
1 Aniyaanii	to 2 Parry		19	02	02.2		α	1 Aniyaanii	to 3 Coral		120	56	28.8				

FIRST ANGLE OF TRIANGLE 101-54-26.6

11	24	46.372	2 Parry		λ	162	22	44.294	φ	11	32	20.254	3 Coral		λ	162	17	10.944
Δφ	+3	32.880			Δλ		+1	14.435	Δφ		-4	01.002			Δλ		+6	47.785
11	28	19.252	1 Aniyaanii		λ'	162	23	58.729	φ'	11	28	19.252	1 Aniyaanii		λ'	162	23	58.729

Logarithms	Values in seconds																	
3.8400459			½(φ+φ')	11-26-32.812			s	4.1585639					½(φ+φ')	11-30-19.753				
9.9755921					Logarithms	Values in seconds	Cos α	9.7108123							Logarithms	Values in seconds		
8.5125035			s	3.8400459			B	8.5124997					s	4.1585639				
2.3281415	1st term	-212.8832	Sin α	9.5132981			h	2.3818759	1st term	+240.9217			Sin α	9.9334352				
7.68009			A'	8.5096690			s²	8.31713					A'	8.5096677				
9.02655			Sec φ'	0.0087642			Sin²α	9.86687					Sec φ'	0.0087642				
0.71179			Δλ	1.8717772	+74.4350		C	0.71669					Δλ	2.6104310	+407.7849			
7.41843	2d term	+.0026	Sin ½(φ+φ')	9.2975056				8.90069	2d term	+.0796			Sin ½(φ+φ')	9.2998596				
4.6563			-Δα	1.1692828	-14.767		n²	4.7638					-Δα	1.9102907	-81.36			
1.9800							D	1.9845										
6.6363	3d term	+.0004						6.7483	3d term	+.0006								
	-Δφ	-212.8802							-Δφ	+241.0019								

FRED A. NIX, ENGINEER TO
DIANE S. NIXON

HOLMES & NARVER ENGINEERS - JOB Nº 640

POSITION COMPUTATION — SECOND ORDER TRIANGULATION

			°	'	"				°	'	"
	2 Coral	to 3 Parry	324	04	06.6	α	3 Parry	to 2 Coral	144	05	13.0
	8		+ 14	59	40.0	3rd ∠	8		-11.7	16	37.5
	2 Coral	to 1 Eniwetok	339	03	46.6	α	3 Parry	to 1 Eniwetok	26	48	35.5
				+	48.4	Δα				-	17.7
			180	00	00.0				180	00	00.0
	1 Eniwetok	to 2 Coral	159	04	35.0	α'	1 Eniwetok	to 3 Parry	206	48	17.8

FIRST ANGLE OF TRIANGLE 47-43-42.8

	°	'	"			°	'	"			°	'	"
φ	11	32	20.254 2 Coral	λ	162	17	10.944	φ	11	24	46.372 3 Parry	λ	162	22	44.294
Δφ		-10	28.789	Δλ		+ 4	03.781	Δφ		- 2	54.907	Δλ		- 1	29.569
φ'	11	21	51.465 1 Eniwetok	λ'	162	21	14.725	φ'	11	21	51.465 1 Eniwetok	λ'	162	21	14.725

Logarithms	Values in seconds			°	'	"
4.3156485			½(φ+φ')	11	- 27	- 05.860
9.9703346						
8.5124997						
2.7984828	1st term	+628.7570				
8.63130						
9.10617						
0.71669						
8.45416	2d term	+ .0286				
5.5970						
1.9845						
7.5815	3d term	+ .0038				
	-Δφ	+628.7894				

	Logarithms	Values in seconds
s	4.3156485	
Sin α	9.5530842	
A'	8.5096677	
Sec φ'	0.0085993	
Δλ	2.3869997	+243.7810
Sin ½(φ+φ')	9.2978492	
-Δα	1.6848489	- 48.400

	Logarithms	Values in seconds
s	3.7796823	
Cos α	9.9506122	
B	8.5123035	
h	2.2427980	
s²	7.55936	
Sin²α	9.30844	
C	0.71179	
	7.57959	
n²	4.4856	
D	1.9800	
	6.4656	

1st term	+174.9033	
2d term	+ .0038	
3d term	+ .0003	
-Δφ	+174.9074	

	°	'	"
½(φ+φ')	11	- 23	- 18.919

	Logarithms	Values in seconds
s	3.7796823	
Sin α	9.6542065	
A'	8.5096690	
Sec φ'	0.0085993	
Δλ	1.9521571	- 89.5689
Sin ½(φ+φ')	9.2954837	
-Δα	1.2476408	+17.686

OFFICIAL USE ONLY

OFFICIAL USE ONLY

83

FROM ANTON SINISGALLI TO
DIANE S. NIXON

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

			°	'	"				°	'	"
2 Pinnacle	to 3 Runit		249	34	07.5	α	3 Runit	to 2 Pinnacle	69	34	34.8
	&		+ 33	17	04.5	3<2		&	98	08	56.6
2 Pinnacle	to 1 Islet		282	51	12.0	α	3 Runit	to 1 Islet	331	25	38.2
				+	37.4	Δα				+	10.2
			180	00	00.0				180	00	00.0
1 Islet	to 2 Pinnacle		102	51	49.4	α	1 Islet	to 3 Runit	151	25	48.4

FIRST ANGLE OF TRIANGLE 48 - 33 - 58.9

11	31	26.010	2 Pinnacle	λ	162	19	45.307	φ	11	32	16.080	3 Runit	λ	162	22	01.621
Δφ		- 42.154		Δλ		+ 33	87.237	Δφ		- 1	32.224		Δλ		+	50.922
φ'	11	30 43.856	1 Islet	λ'	162	22	52.544	φ'	11	30	43.856	1 Islet	λ'	162	22	52.543

Logarithms	Values in seconds			°	'	"	Logarithms	Values in seconds		°	'	"	Logarithms	Values in seconds
3.7649177			½(φ+φ')	11	31	04.933	a	3.5087376					½(φ+φ')	11 - 31 - 29.968	
9.3472444							cos α	9.9435987							
8.5125002				Logarithms	Values in seconds		B	8.5124998							
1.6246623	1st term	+42.1369	s	3.7649177			h	1.9648361	1st term	+92.2224				Logarithms	Values in seconds
7.52984			Sin α	9.9889791			s²	7.01748					Sin α	9.6796766	
9.97796			A'	8.5096679			Sin² α	9.35935					A'	8.5096677	
0.71610			Sec φ'	0.0088261			C	0.71664					Sec φ'	0.0088261	
8.22390	2d term	+ .0167	Δλ	2.2723908		+187.2366		7.09347	2d term	+ .0012			Δλ	1.7069080	+50.9223
3.2493			Sin ½(φ-φ')	9.3003268			h²	3.9397					Sin ½(φ+φ')	9.3005854	
1.9840			-Δα	1.5727176		-37.387	D	1.9845					-Δα	1.0074934	-10.174
5.2233	3d term	+ .0000						5.9242	3d term	+ .0000					
	-Δφ	+42.1536							-Δφ	-92.2236					

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

2 North Base to 3 Coral		75	02	07.9	α	3 Coral	to 2 North Base		255	01	20.1
8		+ 79	53	48.8	3rd $\angle$	8			- 33	10	30.8
North Base to 1 Piiraai		154	55	56.7	α	3 Coral	to 1 Piiraai		221	50	49.3
			-	12.5	$\Delta\alpha$						+ 35.4
		180	00	00.0					180	00	00.0
1 Piiraai	to 2 North Base	334	55	44.2	α	1 Piiraai	to 3 Coral		41	51	24.7

FIRST ANGLE OF TRIANGLE 66-55-405

11	33	23.267	2 North Base	λ	162	21	09.893	ϕ	11	32	20.254	3 Coral	λ 162 17 10.944
	+ 2	11.412		$\Delta\lambda$		- 1	02.341	$\Delta\phi$		+ 3	11.426		$\Delta\lambda$ + 2 56.608
11	35	34.679	1 Piiraai	λ'	162	20	07.552	ϕ'	11	35	34.679	1 Piiraai	λ' 162 20 07.552

Logarithms	Values in seconds			Logarithms	Values in seconds
3.6491067		$\frac{1}{2}(\phi+\phi')$	11 - 34 - 28.973	s 3.9041724	
9.9570365			Logarithms	Values in seconds	Cos α 9.8721147	
8.5124996		s	3.6491067		B 8.5124997	
2.1186428	1st term	Sin α	9.6270451	-131.4143	h 2.2887868	1st term -194.4405
7.29821		A'	8.5096676		s^2 7.80834	
9.25409		Sec ϕ'	0.0089513		Sin α 9.64844	
0.71736		$\Delta\lambda$	1.7947707	-62.341	C 0.71669	
7.26966	2d term	+ .0019	Sin $\frac{1}{2}(\phi+\phi')$	9.3024296		8.17347	2d term + .0149
4.2373			$-\Delta\alpha$	1.0972003	+12.508	h^2 4.5776	
1.9851						D 1.9845	
6.2224	3d term	+ .0000				6.5621	3d term + .0000
	$-\Delta\phi$	-131.4124					$-\Delta\phi$ -194.4256

Logarithms	Values in seconds	
$\frac{1}{2}(\phi+\phi')$	11 - 33 - 57.467	
s	3.9041724	
Sin α	9.8242197	
A'	8.5096677	
Sec ϕ'	0.0089513	
$\Delta\lambda$	2.2470111	+176.6083
Sin $\frac{1}{2}(\phi+\phi')$	9.3021056	
$-\Delta\alpha$	1.5491168	-35.460

56

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

OFFICIAL USE ONLY

		°	'	"
α	2 Aoman to 3 Coral	24	32	57.2
∠	8	+86	53	44.4
α	2 Aoman to 1 Bokon	111	26	41.6
Δα			−	34.7
		180	00	00.0
α'	1 Bokon to 2 Aoman	291	26	06.9

		°	'	"
α	3 Coral to 2 Aoman	204	32	29.8
3d ∠	8	−30	06	50.8
α	3 Coral to 1 Bokon	174	25	39.0
Δα			−	07.2
		180	00	00.0
α'	1 Bokon to 3 Coral	354	25	31.8

FIRST ANGLE OF TRIANGLE 62 − 59 − 24.9

	°	'	"			°	'	"			°	'	"			°	'	"
φ	11	37	15.282	2 Aoman	λ	162	19	27.584	φ	11	32	20.254	3 Coral	λ	162	17	10.944	
Δφ		+1	06.764		Δλ		− 2	52.446	Δφ		+ 6	01.791		Δλ			− 35.806	
φ'	11	38	22.046	1 Bokon	λ'	162	16	35.138	φ'	11	38	22.045	1 Bokon	λ	162	16	35.138	

	Logarithms	Values in seconds		
s	3.7491203			
Cos α	9.5630135			
B	8.5124992			
h	1.8246330	1st term	−66.7779	
s²	7.49824			
Sin² α	9.93768			
C	0.71736			
	8.15328	2d term	+.0142	
h²	3.6493			
D	1.9851			
	5.6344	3d term	+.0000	
		−Δφ	−66.7637	

	°	'	"	Logarithms	Values in seconds	
½(φ+φ')	11	37	48.664			
s				3.7491203		
Sin α				9.9688423		
A				8.5096676		
Sec φ'				0.0090237		
Δλ				2.2366539	−172.4463	
Sin½(φ−φ')				9.3044775		
−Δα				1.5411314	+34.764	

	Logarithms	Values in seconds	
s	4.0480178		
Cos α	9.9979427		
B	8.5124997		
h	2.5584602	1st term	−361.7930
s²	8.09604		
Sin² α	7.97449		
C	0.71669		
	6.78722	2d term	+.0006
n²	5.1169		
D	1.9845		
	7.1014	3d term	+.0013
		−Δφ	−361.7911

	°	'	"	Logarithms	Values in seconds	
½(φ+φ')	11	37	21.150			
s				4.0480178		
Sin α				8.9872425		
A'				8.5096677		
Sec φ'				0.0090237		
Δλ				1.5539517	−35.8057	
Sin½(φ−φ')				9.3029656		
−Δα				0.8569173	+7.193	

28

9

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

	2 Boga	to 3 Engebi	260	44	14.1	α	3 Engebi	to 2 Boga	80	45	22.3
		&	+ 55	44	06.8	3d ∠		&	- 80	36	19.7
	2 Boga	to 1 Photo	316	28	20.9	α	3 Engebi	to 1 Photo	0	09	02.6
				+ 1	07.7	$\Delta\alpha$				-	00.2
			180	00	00.0				180	00	00.0
	1 Photo	to 2 Boga	136	29	28.6	α'	1 Photo	to 3 Engebi	180	09	02.4

FIRST ANGLE OF TRIANGLE

ϕ	11 38 47.715	2 Boga	λ	162	09	17.366	ϕ	11 39 41.964	3 Engebi	λ	162	14	55.152
$\Delta\phi$	- 5 49.623		$\Delta\lambda$		+ 5	36.708	$\Delta\phi$	- 6 43.873		$\Delta\lambda$		-	01.078
ϕ'	11 32 58.092	1 Photo	λ'	162	14	54.074	ϕ'	11 32 58.091	1 Photo	λ'	162	14	54.074

	Logarithms	Values in seconds					Logarithms	Values in seconds				
s	4.1706707		$\frac{1}{2}(\phi+\phi')$	11 - 35 - 52.903			$\log s^2$	4.0937486		$\frac{1}{2}(\phi+\phi')$	11 - 36 - 20.028	
$\log\sin\alpha$	9.8603641			Logarithms	Values in seconds		Cos α	9.9999985			Logarithms	Values in seconds
B	8.5124964		s	4.1706707			B	8.5124960		s	4.0937486	
h	2.5435312	1st term +349.5674	Sin α	9.8380320			h	2.6062431	1st term +403.8712	Sin α	7.4200540	
s^2	8.34134		A'	8.5096666			s^2	8.18750		A'	8.5096665	
$\log\sin^2\alpha$	9.67606		Sec ϕ'	0.0088838			$\sin^2\alpha$	4.84011		Sec ϕ'	0.0088838	
C	0.72082		$\Delta\lambda$	2.5272531	+336.7078		C	0.72139		$\Delta\lambda$	0.0323529	-1.0784
	8.73822	2d term + .0547	$\sin\frac{1}{2}(\phi+\phi')$	9.3032916				3.74900	2d term + .0000	$\sin\frac{1}{2}(\phi+\phi')$	9.3035698	
h^2	5.0871		$-\Delta\alpha$	1.8305447	- 67.693		h^2	5.2125		$-\Delta\alpha$	9.3359227	+0.2171
D	1.9884						D	1.9888				
	7.0755	3d term + .0012						7.2013	3d term + .0016			
		$-\Delta\phi$ +349.6233							$-\Delta\phi$ +403.8728			

28

DECLASSIFIED PER DOE LETTER DATED JULY, 15, 1994
FROM ANTON SINISGALLI TO
DIANE S. NIXON

HOLMES & NARVER ENGINEERS JOB Nº 640

POSITION COMPUTATION SECOND ORDER TRIANGULATION

2 Engebi	to 3 Aoman	298	38	01.3	α	3 Aoman	to 2 Engebi	118	38	56.3
	B	+ 61	31	01.3	180°∠		B	- 72	16	56.8
2 Engebi	to 1 Photo	0	09	02.6	α	3 Aoman	to 1 Photo	46	21	59.5
				- 0.2	Δα					- 54.9
		180	00	00.0				180	00	00.0
1 Photo	to 2 Engebi	180	09	02.4	α'	1 Photo	to 3 Aoman	226	21	04.6

FIRST ANGLE OF TRIANGLE

φ	11	39	41.964	2 Engebi	λ	162	14	55.152	φ	11	37	15.282	3 Aoman	λ	162	19	27.584
Δφ		-6	43.873		Δλ			- 01.077	Δφ		-4	17.191		Δλ		-4	33.509
φ'	11	32	58.091	1 Photo	λ'	162	14	54.075	φ'	11	32	58.091	1 Photo	λ'	162	14	54.075

Logarithms	Values in seconds			° ' "	Logarithms	Values in seconds		° ' "
4.0937487		½(φ+φ')		11 - 36 -20.028	s 4.0588211			½(φ+φ') 11 - 35 - 06.686
9.9999985			Logarithms	Values in seconds	Cos λ 9.8388758			Logarithms	Values in seconds
8.5124960		s	4.0937487		B 8.5124972			s 4.0588211	
2.6062432	1st term	Sin α	7.4200540	+403.8715	h 2.4101941	1st term	+257.1545	Sin α 9.8595999	
8.18750		A'	8.5096665		s² 8.11764			A' 8.5096669	
4.84011		Sec φ'	0.0088838		Sin²α 9.71920			Sec φ' 0.0088838	
0.72139		Δλ	0.0323580	-1.0774	C 0.71984			Δλ 2.4369717	-273.566
3.74900	2d term	Sin ½(φ+φ')	9.3035698		8.55668	2d term	+ .0360	Sin ½(φ+φ') 9.3028172	
5.2125		-Δα	9.3359278	+0.217	n² 4.8204			-Δα 1.7397889	+54.927
1.9888					D 1.9875				
7.2013	3d term			+ .0016	6.8079	3d term	+ .0006		
	-Δλ			+403.8731		-Δφ	+257.1911		

88

BASE LINE COMPUTATIONS

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB NO. 640

COMPUTATION OF RUNIT ISLAND BASE LINE

COMPUTED BY L.S.H. CHECKED BY L.M.P. DATE Feb. 28, 1950

SECTION	DATE	DIR OF MEAS	TAPE NO	TAPE SUPPORT	UNCORRECTED LENGTH		TEMP	CORRECTIONS					REDUCED LENGTH	ACCEPTED LENGTH		
					TAPE LNGTH	METERS		TEMP	TAPE AND CATENARY	SET-UP SET-BACK	INCLINATION	SEA LEVEL				
							°C	METERS	METERS	METERS	METERS	METERS	METERS	METERS	MM.	MM.
△North Base																
Stake No. 2	2-24-50	F	6464	2		18.5349	38.0	+0.0001		18.5350	-0.0004		18.5346			
" " 3		F		2	1/2	25	34.0	+0.0002		-0.0579	-0.0000		24.9423			
" " 4		F		3	1	50	32.0	+0.0002			-0.0006		49.9996			
" " 5		F		3	1	50	32.0	+0.0002			-0.0040		49.9962			
" " 6		F		3	1	50	32.0	+0.0002			-0.0003		49.9999			
" " 7A		F		3	1	50	32.0	+0.0002		-0.0432	-0.0022		49.9548			
													243.4274	243.4274		
Stake No 7A																
" " 6	2-24-50	B		3	1	50	30.0	+0.0002			-0.0022		49.9980			
" " 5		B		3	1	50	32.5	+0.0002			-0.0003		49.9999			
" " 4		B		3	1	50	34.0	+0.0003			-0.0040		49.9963			
" " 3		B		3	1	50	34.0	+0.0003		-0.0434	-0.0006		49.9563			
" " 2		B		2	1/2	25	34.0	+0.0002		-0.0579	-0.0000		24.9423			
△North Base		B		2		18.5349	38.0	+0.0001			-0.0004		18.5346			
													243.4274			

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

~~OFFICIAL USE ONLY~~

COMPUTATION OF RUNIT ISLAND BASE LINE

COMPUTED BY L.S.H. CHECKED BY L.M.P. DATE Feb. 24, 1950

SECTION	DATE	DIR. OF MEAS	TAPE NO	TAPE SUPPORT	UNCORRECTED LENGTH: TAPE LNGTH	UNCORRECTED LENGTH: METERS	TEMP	CORRECTIONS: TEMP	CORRECTIONS: TAPE AND CATENARY	CORRECTIONS: SET-UP SET—BACK	CORRECTIONS: INCLINATION	CORRECTIONS: SEA LEVEL	REDUCED LENGTH	ADOPTED LENGTH	(V)	(V V)
							"C"	METERS	METERS	METERS	METERS	METERS	METERS	METERS	MM.	MM.
Stake No. 7A																
" " 8	2-24-50	F	6621	3	1	50	34.5	+0.0003		-0.0734	-0.0000		49.9269			
" " 9		F		3	1	50	35.5	+0.0003			-0.0020		49.9983			
" " 10		F		3	1	50	35.0	+0.0003		+0.0526	-0.0000		50.0529			
" " 11		F		3	1	50	36.5	+0.0003			-0.0000		50.0003			
" " 12		F		3	1	50	36.0	+0.0003		-0.0627	-0.0001		49.9375			
" " 13		F		3	1	50	36.5	+0.0003			-0.0002		50.0001			
" " 14		F		3	1	50	33.5	+0.0003			-0.0005		49.9998			
" " 15		F		3	1	50	36.0	+0.0003			-0.0001		50.0002			
" " 16		F		3	1	50	34.5	+0.0003			-0.0000		50.0003			
" " 17		F		3	1	50	34.5	+0.0003			-0.0000		50.0003			
" " 18		F		3	1	50	33.0	+0.0003			-0.0014		49.9989			
" " 19		F		3	1	50	36.5	+0.0003			-0.0001		50.0002			
" " 20		F		3	1	50	37.5	+0.0003		-0.0356	-0.0001		49.9646			
													649.8803	649.8766		
Stake No. 20																
" " 19	2-25-50	B	6619	3	1	50	34.0	+0.0003		-0.0683	-0.0001		49.9319			
" " 18		B		3	1	50	34.0	+0.0003		+0.0411	-0.0001		50.0413			
" " 17		B		3	1	50	33.0	+0.0003			-0.0014		49.9989			
" " 16		B		3	1	50	33.0	+0.0003			-0.0000		50.0003			
" " 15		B		3	1	50	31.0	+0.0002			-0.0000		50.0002			
" " 14		B		3	1	50	32.0	+0.0002			-0.0001		50.0001			
" " 13		B		3	1	50	32.0	+0.0002			-0.0005		49.9997			
" " 12		B		3	1	50	33.0	+0.0003			-0.0002		50.0001			
" " 11		B		3	1	50	34.0	+0.0003		-0.0759	-0.0001		49.9243			
" " 10		B		3	1	50	34.0	+0.0003			-0.0000		50.0003			
" " 9		B		3	1	50	32.0	+0.0002			-0.0000		50.0002			
" " 8		B		3	1	50	32.0	+0.0002			-0.0020		49.9982			
" " 7A		B		3	1	50	33.0	+0.0003		-0.0229	-0.0000		49.9774			
													649.8729			

~~OFFICIAL USE ONLY~~

91

HOLMES & NARVER ENGINEERS JOB Nº. 640

COMPUTATION OF RUNIT ISLAND BASE LINE

COMPUTED BY L.S.H. CHECKED BY L.M.P. DATE Feb. 28, 1950

SECTION	DATE	DIR. OF MEAS.	TAPE NO	TAPE SUPPORT	UNCORRECTED LENGTH TAPE LNGTH	UNCORRECTED LENGTH METERS	TEMP	COR- TEMP	COR- TAPE AND CATENARY	COR- SET-UP SET—BACK	COR- INCLINATION	COR- SEA LEVEL	REDUCED LENGTH	ACCEPTED LENGTH	(V)	(V²)
							"C"	METERS	METERS	METERS	METERS	METERS	METERS	METERS	MM.	MM.
Stake No. 20																
" " 21	2-24-50	F	6619	3	1	50	38.0	+0.0004			-0.0030		49.9974			
" " 22		F		3	1	50	38.0	+0.0004			-0.0002		50.0002			
" " 23		F		3	1	50	38.0	+0.0004			-0.0005		49.9999			
" " 24		F		3	1	50	36.0	+0.0003			-0.0001		50.0002			
" " 25		F		3	1	50	35.0	+0.0003			-0.0010		49.9993			
" " 26		F		3	1	50	33.0	+0.0003			-0.0001		50.0002			
" " 27		F		3	1	50	32.0	+0.0002			-0.0000		50.0002			
" " 28		F		3	1	50	30.0	+0.0002			-0.0000		50.0002			
" " 29		F		3	1	50	30.5	+0.0002			-0.0023		49.9979			
" " 30		F		3	1	50	30.5	+0.0002			-0.0005		49.9997			
" " 31		F		3	1	50	31.0	+0.0002			-0.0004		49.9998			
" " 32		F		3	1	50	31.0	+0.0002			-0.0014		49.9988			
" " 33		F		3	1	50	32.0	+0.0002			-0.0001		50.0001			
" " 34B		F		3	1	50	30.0	+0.0002		No ±	-0.0000		50.0002			
													699.9951	699.9988		
Stake No. 34B																
" " 33	2-25-50	B	6621	3	1	50	29.0	+0.0002			-0.0000		50.0002			
" " 32		B		3	1	50	28.5	+0.0002			-0.0001		50.0001			
" " 31		B		3	1	50	29.0	+0.0002			-0.0014		49.9988			
" " 30		B		3	1	50	29.0	+0.0002			-0.0004		49.9998			
" " 29		B		3	1	50	29.5	+0.0002			-0.0005		49.9997			
" " 28		B		3	1	50	30.0	+0.0002			-0.0023		49.9979			
" " 27		B		3	1	50	30.0	+0.0002			-0.0000		50.0002			
" " 26		B		3	1	50	28.0	+0.0002			-0.0000		50.0002			
" " 25		B		3	1	50	29.0	+0.0002			-0.0001		50.0001			
" " 24		B		3	1	50	29.0	+0.0002			-0.0010		49.9992			
" " 23		B		3	1	50	30.0	+0.0002			-0.0001		50.0001			
" " 22		B		3	1	50	30.0	+0.0002			-0.0005		49.9997			
" " 21		B		3	1	50	31.0	+0.0002			-0.0002		50.0000			
" " 20		B		3	1	50	30.0	+0.0002		+0.0094	-0.0030		50.0066			
													700.0026			

HOLMES & NARVER ENGINEERS JOB Nº. 640

~~OFFICIAL USE ONLY~~

COMPUTATION OF *RUNIT ISLAND* BASE LINE

COMPUTED BY *L.S.H.* CHECKED BY *L.M.P.* DATE *Feb. 28, 1950*

SECTION	DATE	DIR OF MEAS	TAPE NO.	TAPE SUPPORT	UNCORRECTED LENGTH: TAPE LENGTH	UNCORRECTED LENGTH: METERS	TEMP.	CORRECTIONS: TEMP	CORRECTIONS: TAPE AND CATENARY	CORRECTIONS: SET-UP SET-BACK	CORRECTIONS: INCLINATION	CORRECTIONS: SEA LEVEL	REDUCED LENGTH	ADOPTED LENGTH	(V)	(VV)
							"C"	METERS	METERS	METERS	METERS	METERS	METERS	METERS	MM.	MM.
Stake No. 34B																
" " 35	2-25-50	F	6464	3	1	50	37.0	+0.0003			-0.0006		49.9997			
" " 36		F		3	1	50	39.0	+0.0004			-0.0022		49.9982			
" " 37		F		3	1	50	38.0	+0.0004			-0.0001		50.0003			
" " 38		F		3	1	50	37.0	+0.0003			-0.0001		50.0002			
" " 39		F		3	1	50	38.0	+0.0004		-0.0409	-0.0002		49.9593			
" " 40		F		3	1	50	37.0	+0.0003			-0.0000		50.0003			
" " 41		F		3	1	50	39.0	+0.0004			-0.0027		49.9977			
" " 42		F		3	1	50	38.0	+0.0004		+0.0353	-0.0024		50.0333			
" " 43C		F		3	1	50	39.0	+0.0004		-0.0062	-0.0008		49.9934			
													449.9824	449.9832		
Stake No. 43C																
" " 42	2-25-50	B	6621	3	1	50	39.0	+0.0004			-0.0008		49.9996			
" " 41		B		3	1	50	38.0	+0.0004			-0.0024		49.9980			
" " 40		B		3	1	50	38.0	+0.0004			-0.0027		49.9977			
" " 39		B		3	1	50	38.0	+0.0004			-0.0000		50.0004			
" " 38		B		3	1	50	37.0	+0.0003			-0.0002		50.0001			
" " 37		B		3	1	50	38.0	+0.0004			-0.0001		50.0003			
" " 36		B		3	1	50	39.0	+0.0004		-0.0165	-0.0001		49.9838			
" " 35		B		3	1	50	39.0	+0.0004			-0.0022		49.9982			
" " 34B		B		3	1	50	38.0	+0.0004		+0.0061	-0.0006		50.0059			
													449.9840			

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

COMPUTATION OF RUNIT ISLAND BASE LINE

COMPUTED BY L.S.H. CHECKED BY L.M.P. DATE Feb. 28, 1950

SECTION	DATE	DIR OF MEAS	TAPE NO	TAPE SUPPORT	UNCORRECTED LENGTH TAPE LNGTH	UNCORRECTED LENGTH METERS	TEMP	CORR TEMP	CORR TAPE AND CATENARY	SECTIONS SET-UP SET-BACK	SECTIONS INCLINATION	SECTIONS SEA LEVEL	REDUCED LENGTH	ACCEPTED LENGTH	(V)	(V²)
							"C"	METERS	METERS	METERS	METERS	METERS	METERS	METERS	MM	MM.
Stake No. 43C																
" " 44	2-25-50	F	6619	3	1	50	34.0	+0.0003		-0.0226	-0.0002		49.9775			
" " 45		F		3	1	50	34.0	+0.0003			-0.0000		50.0003			
" " 46		F		3	1	50	31.0	+0.0002		+0.0203	-0.0004		50.0201			
" " 47		F		3	1	50	36.0	+0.0003			-0.0044		49.9959			
" " 48		F		3	1	50	38.0	+0.0004			-0.0011		49.9993			
" " 49		F		3	1	50	41.0	+0.0004			-0.0061		49.9943			
" " 50		F		3	1	50	37.0	+0.0003		-0.0422	-0.0031		49.9550			
" " 51		F		3	1	50	40.0	+0.0004			-0.0033		49.9971			
" " 52		F		3	1	50	40.0	+0.0004			-0.0000		50.0004			
" " 53		F		3	1	50	34.0	+0.0003			-0.0055		49.9948			
" " 54		F		3	1	50	28.0	+0.0002			-0.0139		49.9863			
" " 55		F		2	1/2	25	29.0	+0.0002		-0.0089	-0.0000		24.9913			
△ Runit		F		2						+6.0652	-0.0006		6.0646			
													580.9769	580.9796		
△ Runit																
Stake No 55	2-26-50	B	6621	2						+6.0652	-0.0006		6.0646			
" " 54		B		2	1/2	25	31.0	+0.0002		-0.0086	-0.0000		24.9916			
" " 53		B		3	1	50	30.0	+0.0002			-0.0139		49.9863			
" " 52		B		3	1	50	30.0	+0.0002			-0.0055		49.9947			
" " 51		B		3	1	50	32.0	+0.0002			-0.0000		50.0002			
" " 50		B		3	1	50	32.0	+0.0002		-0.0251	-0.0033		49.9718			
" " 49		B		3	1	50	32.0	+0.0002			-0.0031		49.9971			
" " 48		B		3	1	50	32.0	+0.0002			-0.0061		49.9941			
" " 47		B		3	1	50	32.0	+0.0002			-0.0011		49.9991			
" " 46		B		3	1	50	32.0	+0.0002			-0.0044		49.9958			
" " 45		B		3	1	50	32.0	+0.0003			-0.0004		49.9999			
" " 44		B		3	1	50	32.0	+0.0002			-0.0000		50.0002			
" " 43C		B		3	1	50	32.0	+0.0002		-0.0130	-0.0002		49.9870			
													580.9824			

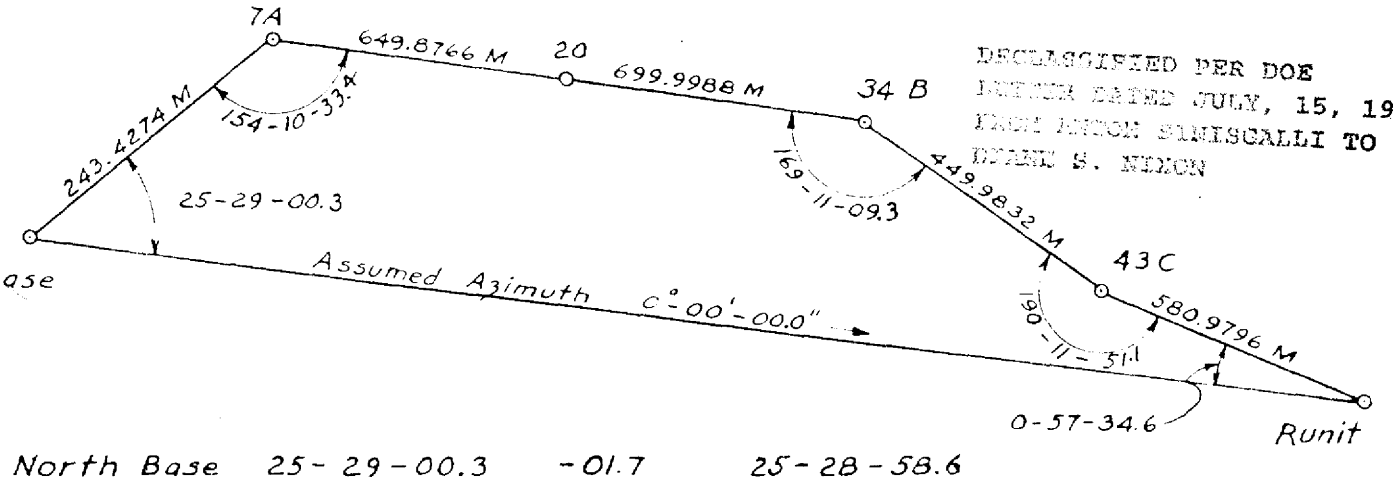

North Base	25-29-00.3	-01.7	25-28-58.6
7-A	154-10-33.4	-01.7	154-10-31.7
34-B	169-11-09.3	-01.8	169-11-07.5
43-C	190-11-51.1	-01.8	190-11-49.3
Runit	0-57-34.6	-01.7	0-57-32.9
	540°-00'-08.7"		540°-00'-00.0"

N.B.-Runit	0-00-00.0			2.0200827 =	+ 104.7328
	+334-31-01.4	Log Sin	25-28-58.6	9.6337132	
N.B.-7A	334-31-01.4	Log	243.4274	2.3863695	
	+ 25-49-28.3	Log Cos	25-28-58.6	9.9555494	
7A-34B	0-20-29.7			2.3419193 =	+ 219.7452
	+10-48-52.5				
34B-43C	11-09-22.2			0.9056651 =	- 8.0476
	-10-11-49.3	Log Sin	0-20-29.7	7.7753714	
43C-Runit	0-57-32.9	Log	1349.8754	3.1302537	
		Log Cos	0-20-29.7	9.9999923	
				3.1302860 =	+ 1349.8516
+ 104.7328					
- 8.0476				1.9398410 =	- 87.0645
- 87.0645		Log Sin	11-09-22.2	9.2866447	
- 9.7252		Log	449.9832	2.6531963	
Σ = 0.1045		Log Cos	11-09-22.2	9.9917148	
				2.0449111 =	+ 441.4800
219.7452					
1349.8516				0.9878395 =	- 9.7252
441.4800		Log Sin	0-57-32.9	8.2237386	
580.8981		Log	580.9796	2.7641609	
Σ = 2591.9749	Log 3.4136308	Log Cos	0-57-32.9	9.9999391	
				2.7641000 =	+ 580.8981

North Base - Runit base line 2591.9749 M

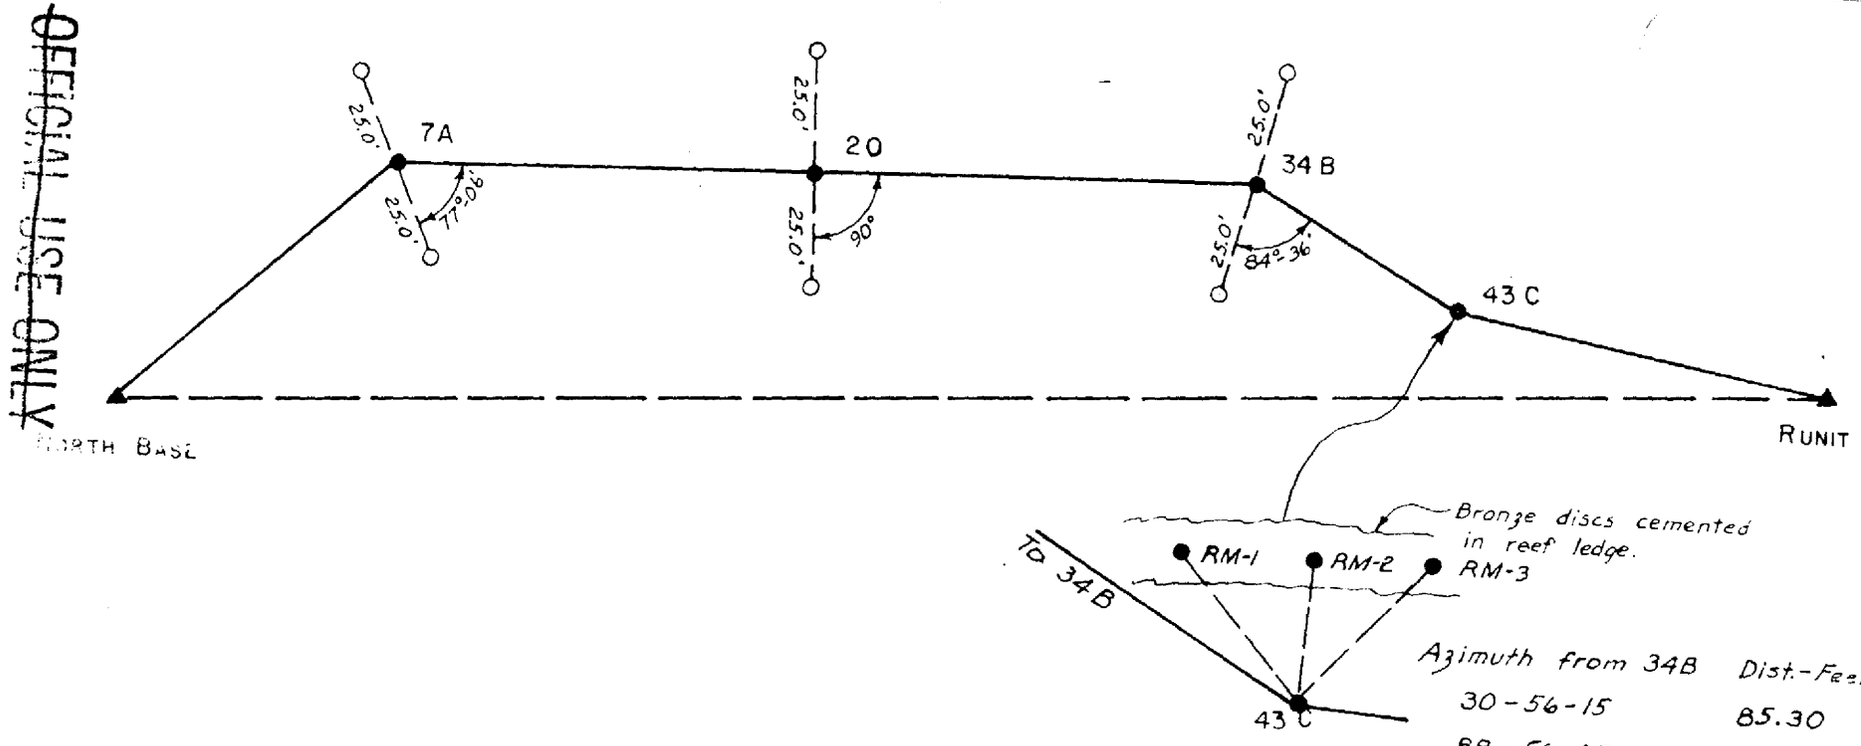

Azimuth from 34B	Dist.-Feet
30-56-15	85.30
88-56-45	70.29
115-47-45	82.97

RUNIT BASE LINE
Reference Markers

● = Bronze discs in concrete blocks flush with surface.
○ = Bronze discs in concrete blocks 24" below surface.
For North Base and Runit reference marks see descriptions of triangulation stations.

PROBABLE ERROR COMPUTATION

SECTION	MEASURED DISTANCE	Discrepancy between 2 Measurements of Section			Probable Error	
		$20\sqrt{\text{dist. in Km.}}$	Allowable Maximum	Actual Difference	$0.6475\sqrt{\frac{\Sigma V^2}{n(n-1)}}$	1 Section
			m	m		m
North Base – 7A	F 243.4274					
	B 243.4274	$20\sqrt{.2434274}$	0.0098	0.0000	0.6745 x 0.000	0.0001
	0.0000					
7A – 20	F 649.8803					
	B 649.8729	$20\sqrt{.6498766}$	0.0161	0.0074	0.6745 x 0.0037	0.0025
	0.0074					
20 – 34 B	F 699.9951					
	B 700.0026	$20\sqrt{.6999988}$	0.0167	0.0075	0.6745 x 0.00375	0.0025
	0.0075					
34B – 43C	F 449.9824					
	B 449.9840	$20\sqrt{.4499832}$	0.0134	0.0016	0.6745 x 0.0008	0.0005
	0.0016					
43C – Runit	F 580.9769					
	B 580.9824	$20\sqrt{.5809796}$	0.0152	0.0055	0.6745 x 0.00275	0.0019
	0.0055					

0.0001^2
0.0025^2
0.0025^2
0.0005^2
0.0019^2

$\Sigma = 0.00001637 \quad \sqrt{} = 0.00405$ M

F 2624.2621
B 2624.2693
0.0072 M

Actual difference 0.0072 = 1:364481
Probable error 0.00405 = 1:647967

HOLMES & NARVER ENGINEERS JOB NO. 680

ABSTRACT OF WYE LEVELS AND COMPUTATION OF INCLINATION CORRECTIONS.

POINT	DISTANCE	MEAN DIFF OF ELEV	INCLINATION CORRECTION	ELEVATION	MEAN ELEVATION	REMARKS
	METERS	~~METERS~~ FEET	MM	METERS	METERS	
North Base						
2	18.5349	+ 0.44	0.4			
3	25	- 0.19	0.0			
4	50	- 0.78	0.6			
5	50	+ 2.06	4.0			
6	50	- 0.54	0.3			
7A	50	+ 1.54	2.2			
			Σ=7.5			
7A						
8	50	- 0.14	0.0			
9	50	+ 1.48	2.0			
10	50	+ 0.06	0.0			
11	50	+ 0.19	0.0			
12	50	+ 0.07	0.1			
13	50	- 0.48	0.2			
14	50	+ 0.75	0.5			
15	50	+ 0.32	0.1			
16	50	- 0.10	0.0			
17	50	+ 0.24	0.0			
18	50	- 1.20	1.4			
19	50	- 0.33	0.1			
20	50	- 0.34	0.1			
			Σ=4.5			

~~OFFICIAL USE ONLY~~

ABSTRACT OF WYE LEVELS AND COMPUTATION OF INCLINATION CORRECTIONS.

POINT	DISTANCE	MEAN DIFF OF ELEV.	INCLINATION CORRECTION	ELEVATION	MEAN ELEVATION	REMARKS
	METERS	~~METERS~~ FEET	MM	METERS	METERS	
20						
21	50	+ 1.81	3.0			
22	50	- 0.43	0.2			
23	50	+ 0.75	0.5			
24	50	- 0.31	0.1			
25	50	+ 1.05	1.0			
26	50	+ 0.40	0.1			
27	50	+ 0.12	0.0			
28	50	+ 0.02	0.0			
29	50	- 1.56	2.3			
30	50	- 0.75	0.5			
31	50	+ 0.66	0.4			
32	50	- 1.20	1.4			
33	50	+ 0.34	0.1			
34 B	50	- 0.17	0.0			
			Σ = 9.6			
34B						
35	50	+ 0.80	0.6			
36	50	- 1.53	2.2			
37	50	- 0.35	0.1			
38	50	- 0.32	0.1			
39	50	- 0.49	0.2			
40	50	+ 0.21	0.0			
41	50	- 1.72	2.7			
42	50	- 1.59	2.4			
43C	50	- 0.95	0.8			
			Σ = 9.1			

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

ABSTRACT OF WYE LEVELS AND COMPUTATION OF INCLINATION CORRECTIONS.

POINT	DISTANCE	MEAN DIFF. OF R.&L.	INCLINATION CORRECTION	ELEVATION	MEAN ELEVATION	REMARKS
	METERS	~~FEET~~ FEET	MM	METERS	METERS	
43C.						
44	50	+ 0.43	0.2			
45	50	- 0.03	0.0			
46	50	+ 0.67	0.4			
47	50	+ 2.15	4.4			
48	50	+ 1.08	1.1			
49	50	- 2.56	6.1			
50	50	- 1.84	3.1			
51	50	- 1.88	3.3			
52	50	+ 0.01	0.0			
53	50	- 2.44	5.5			
54	50	+ 3.87	13.9			
55	50	+ 0.07	0.0			
Runit	6.0652	- 0.27	0.6			
			Σ=38.6			

~~OFFICIAL USE ONLY~~

101

K&E



KEUFFEL & ESSER CO.

Adams and Third Streets Hoboken N.J.

TELEPHONE HOBOKEN 3-1400 TELETYPE HOB 1214

Date [illegible]

REPORT ON

K. & E. TYPE NO. 7000CM - 50 Meters Nickel Steel Tape
LOVAR (Trademark)

Serial No. [illegible]

The above identified tape has been compared with our standard (which corresponds to the U. S. Standard at the National Bureau of Standards at Washington, D. C.) and was found to have the following length at 20° Centigrade (68° F.) under the conditions stated below:-

Supported on a horizontal flat surface:-

Tension	Interval	Length
14-1/2 K.	0-50 M.	50.000 M.

Supported at the 0, 25 and 50 M. points:-

Tension	Interval	Length
15 K.	0-50 M.	50.000 M.

The coefficient of expansion of the tape is assumed to be 0.000 000 4 per degree Centigrade (0.000 000 22 per degree Fahrenheit).

KEUFFEL & ESSER CO.

By [signature]
Vice President

awk-fp

KEUFFEL & ESSER CO.

Adams and Third Streets, Hoboken, N.J.

TELEPHONE HOBOKEN 3-1100 - TELETYPE HO 1414

Date Sept. 16, 1949

REPORT ON

K. & E. TAPE NO. 70980M - 50 Meters Nickel Steel Tape
INVAR (Trademark)

Serial No. 6464

The above identified tape has been compared with our standard (which corresponds to the U. S. Standard at the National Bureau of Standards at Washington, D. C.) and was found to have the following length at 20° Centigrade (68° F.) under the conditions stated below:-

Supported on a horizontal flat surface:-

Tension	Interval	Length
11-1/2 Kg.	0-50 M.	50.0[illegible] M.

Supported at the 0, 25 and 50 M. points:-

Tension	Interval	Length
15 Kg.	0-50 M.	50.000 M.

The coefficient of expansion of the tape is assumed to be 0.000 000 4 per degree Centigrade (0.000 000 22 per degree Fahrenheit).

KEUFFEL & ESSER CO.

By [signature]
Vice President

CLASSIFIED BY DOE
DEC 15, 1996
ILLOS

awk-fp

KEUFFEL & ESSER CO.
Adams and Third Streets Hoboken, N.J.
TELEPHONE HOboken 3-7100 TELETYPE HOB 1414

Date February 1st, 1950

REPORT ON

K. & E. STEEL NO. 76980 - 50 Meters Nickel Steel Tape
LOVAR (Trademark)

Serial No. 5619

The above identified tape has been compared with our standard (which corresponds to the U. S. Standard at the National Bureau of Standards at Washington, D. C.) and was found to have the following length at 20° Centigrade (68° F.) under the conditions stated below:-

Supported on a horizontal flat surface:-

Tension	Interval	Length
11 Kg.	0-50 M.	50.000 M.

Supported at the 0, 25 and 50 M. points:-

Tension	Interval	Length
15 Kg.	0-50 M.	50.000 M.

The coefficient of expansion of the tape is assumed to be 0.000 000 4 per degree Centigrade (0.000 000 22 per degree Fahrenheit).

KEUFFEL & ESSER CO.

By A. W. Keuffel
Vice President

awk-rp

104

HOLMES & NARVER ENGINEERS JOB NO. 640

~~OFFICIAL USE ONLY~~

DESCRIPTION OF TRIANGULATION STATION

NAME OF STATION AOMAN LOCATION Aoman Island
Eniwetok Atoll
Marshall Islands

CHIEF OF PARTY LSH

DATE 1949-50

DISTANCES AND DIRECTIONS TO REFERENCE MARKS

OBJECT	DISTANCE		DIRECTION	AZIMUTH
	METERS	FEET		
Coral	-	-	0-00-00.0	
R.M. No. 1	22.860	75.00	188-08-10.0	
R.M. No. 2	22.860	75.00	278-08-10.0	

ELEV. OF MARK ABOVE MLW 10.0'

HEIGHT OF TELESCOPE ABOVE MARK 40.5'

HEIGHT OF LIGHT ABOVE MARK 40.5'

DETAILED DESCRIPTION:

This station is located on Aoman Island approximately 200 feet west of the west end of the Aoman-Biijiri causeway and 90 feet from the high water mark on the lagoon side. It is Traverse Station Aoman of the Joint Task Force Seven Survey and is a standard USC&GS triangulation disk set in a concrete block flush with the surface.

Reference marks are standard Holmes & Narver bronze disks in concrete blocks set flush with the surface.

This station was disturbed. See Recovery Note of June 7, 1951.

DESCRIBED BY FPC

MARKED BY

106

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

~~OFFICIAL USE ONLY~~

DESCRIPTION OF TRIANGULATION STATION

NAME OF STATION BOGA LOCATION Bogallua Island
Eniwetok Atoll
Marshall Islands

CHIEF OF PARTY LSH

DATE 1949-50

DISTANCES AND DIRECTIONS TO REFERENCE MARKS

OBJECT	DISTANCE		DIRECTION	AZIMUTH
	METERS	FEET		
Coral	-	-	0-00-00.0	
R.M. No. 1	59.015	193.62	94-53-50.0	
R.M. No. 2	36.576	120.00	154-54-00.0	

ELEV. OF MARK ABOVE M.L.W. 7.1'

HEIGHT OF TELESCOPE ABOVE MARK 40.5'

HEIGHT OF LIGHT ABOVE MARK 40.5'

DETAILED DESCRIPTION

This station is located on Bogallua Island at the extreme east end of the island approximately 20 feet from the high water mark.

The mark is a standard Holmes & Narver bronze disk set in a concrete block flush with the surface.

The reference marks are standard Holmes & Narver bronze disks se t in concrete blocks flush with the surface and are intersection points on the Bogallua topo traverse.

107

FPC

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No 640

~~OFFICIAL USE ONLY~~

DESCRIPTION OF TRIANGULATION STATION

NAME OF STATION BOKON LOCATION Bokonaarappu Island
Eniwetok Atoll
Marshall Islands

CHIEF OF PARTY LSH

DATE 1949-50

DISTANCES AND DIRECTIONS TO REFERENCE MARKS				
OBJECT	DISTANCE		DIRECTION	AZIMUTH
	METERS	FEET		
Aomon	-	-	0-00-00.0	
R.M. No. 1	15.240	50.00	207-24-12.2	
R.M. No. 2	15.240	50.00	279-24-12.2	

ELEV. OF MARK ABOVE MLW 10.4'

HEIGHT OF TELESCOPE ABOVE MARK 15.5'

HEIGHT OF LIGHT ABOVE MARK 15.5'

DETAILED DESCRIPTION:

This station is located on Bokonaarappu Island approximately 660 feet from the west end of the island and 56 feet from the high water mark on the lagoon side.

The station mark is a standard Holmes & Narver bronze disk set in a concrete block flush with the surface.

The reference marks are standard Holmes & Narver bronze disks set in concrete blocks flush with the surface.

DESCRIBED BY LEG

MARKED BY

108

~~OFFICIAL USE ONLY~~

K. S. Hammond

101

HOLMES & NARVER ENGINEERS JOB No. 640 ~~OFFICIAL USE ONLY~~

DESCRIPTION OF TRIANGULATION STATION

NAME OF STATION ISLET LOCATION South of Runit Island
Eniwetok Atoll
Marshall Islands

CHIEF OF PARTY LSH

DATE 1949-50

DISTANCES AND DIRECTIONS TO REFERENCE MARKS				
OBJECT	DISTANCE		DIRECTION	AZIMUTH
	METERS	FEET		
None				

ELEV. OF MARK ABOVE MLW 8.0'

HEIGHT OF TELESCOPE ABOVE MARK 11.5'

HEIGHT OF LIGHT ABOVE MARK 11.5'

DETAILED DESCRIPTION:

This station is located on the first sand island south of Runit at approximately the center of the island.

The disk is a standard Holmes & Narver bronze disk set in a concrete block flush with surface.

Due to the limited area of the island no reference marks were set.

DESCRIBED BY LEG MARKED BY

109

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

~~OFFICIAL USE ONLY~~

DESCRIPTION OF TRIANGULATION STATION

NAME OF STATION NORTH BASE LOCATION Runit Island
Eniwetok Atoll
Marshall Islands

CHIEF OF PARTY LSH

DATE 1949-50

DISTANCES AND DIRECTIONS TO REFERENCE MARKS				
OBJECT	DISTANCE		DIRECTION	AZIMUTH
	METERS	FEET		
Coral	-	-	0-00-00.0	
R.M. No. 3	45.686	149.89	101-59-20.0	
R.M. No. 1	31.992	104.96	267-33-20.0	
R.M. No. 2	25.233	82.785	340-35-50.0	

ELEV. OF MARK ABOVE MLW 8.0'

HEIGHT OF TELESCOPE ABOVE MARK 40.5'

HEIGHT OF LIGHT ABOVE MARK 40.5'

DETAILED DESCRIPTION:

This station is located at the north end of Runit Island approximately 200 feet from the end of the island and 65 feet from the high water mark on the lagoon.

The marker is a standard USC&GS triangulation station disk in a concrete block. This marker has been disturbed and is not in the location recorded in the Report of the Engineer, Joint Task Force Seven.

Reference marks are standard Holmes & Narver bronze disks cemented into the surface of the reef ledge at tide range.

110

DESCRIBED BY FPC MARKED BY

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB № 640

~~OFFICIAL USE ONLY~~

DESCRIPTION OF TRIANGULATION STATION

NAME OF STATION PARRY LOCATION Parry Island
Eniwetok Atoll
Marshall Islands

CHIEF OF PARTY LSH

DATE 1949-50

DISTANCES AND DIRECTIONS TO REFERENCE MARKS

OBJECT	DISTANCE		DIRECTION	AZIMUTH
	METERS	FEET		
Coral	-	-	0-00-00.0	
R.M. No. 1	15.246	50.02	46-34-25.4	
R.M. No. 2	15.224	49.95	181-37-20.4	

ELEV. OF MARK ABOVE M.W. 10.0'

HEIGHT OF TELESCOPE ABOVE MARK 24.5'

HEIGHT OF LIGHT ABOVE MARK 24.5'

DETAILED DESCRIPTION:

This station is located on Parry Island approximately 450 feet from the north end of the island. The mark is set at the intersection of the diagonals of the opposite legs of a four leg steel communication tower.

A twenty-four foot wood instrument tripod and a platform at the required height on the tower was constructed for observation.

The station is marked with a standard Holmes & Narver bronze disk in a concrete block flush with the surface.

The reference monuments are standard Holmes & Narver bronze disks in concrete blocks flush with the surface.

LEG

111

HOLMES & NARVER ENGINEERS JOB № 640

DESCRIPTION OF TRIANGULATION STATION

~~OFFICIAL USE ONLY~~

NAME OF STATION PIIRAAI LOCATION Piiraai Island
Eniwetok Atoll
Marshall Islands

CHIEF OF PARTY LSH

DATE 1949-50

DISTANCES AND DIRECTIONS TO REFERENCE MARKS				
OBJECT	DISTANCE		DIRECTION	AZIMUTH
	METERS	FEET		
N. Base	-	-	0-00-00.0	
R.M. No. 2	22.860	75.00	0-31-55.0	
R.M. No. 1	22.860	75.00	270-31-55.0	

ELEV. OF MARK ABOVE MLW 8.8'

HEIGHT OF TELESCOPE ABOVE MARK 15.5'

HEIGHT OF LIGHT ABOVE MARK 15.5'

DETAILED DESCRIPTION:

This station is located on Piiraai Island approximately 350 feet from the south end of the island and 75 feet from the high water mark on the lagoon side.

The station marker is a standard Holmes & Narver bronze disk set in a concrete block flush with the surface.

The reference marks are standard Holmes & Narver bronze disks set in concrete blocks flush with the surface.

DESCRIBED BY FPC

MARKED BY

112

105

HOLMES & NARVER ENGINEERS JOB No. 640

~~OFFICIAL USE ONLY~~

DESCRIPTION OF TRIANGULATION STATION

NAME OF STATION PINNACLE LOCATION Eniwetok Lagoon
Eniwetok Atoll
Marshall Islands

CHIEF OF PARTY LSH

DATE 1949-50

DISTANCES AND DIRECTIONS TO REFERENCE MARKS				
OBJECT	DISTANCE		DIRECTION	AZIMUTH
	METERS	FEET		
None				

ELEV. OF MARK ABOVE MLW 8.0'

HEIGHT OF TELESCOPE ABOVE MARK 5.0'

HEIGHT OF LIGHT ABOVE MARK 5.0'

DETAILED DESCRIPTION

This station is a prefabricated steel tripod which was set in place on a coral reef approximately 2.7 statute miles west of the south end of Runit Island. The station was occupied at low water and under favorable weather conditions.

This is not a permanent station and will be removed as it is considered a navigation hazard.

DESCRIBED BY LEG

113

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

DESCRIPTION OF TRIANGULATION STATION

~~OFFICIAL USE ONLY~~

NAME OF STATION TEITEIR LOCATION Teiteiripucchi Island
Eniwetok Atoll
Marshall Islands

CHIEF OF PARTY LSH

DATE 1949-50

DISTANCES AND DIRECTIONS TO REFERENCE MARKS				
OBJECT	DISTANCE		DIRECTION	AZIMUTH
	METERS	FEET		
Coral	-	-	0-00-00.0	
R.M. No. 1	15.240	50.00	125-23-00.0	
R.M. No. 2	15.240	50.00	215-23-00.0	

ELEV. OF MARK ABOVE MLW 8.6'

HEIGHT OF TELESCOPE ABOVE MARK 40.5'

HEIGHT OF LIGHT ABOVE MARK 40.5'

DETAILED DESCRIPTION:

This station is located on Teiteiripucchi Island approximately 800 feet from the west end of the island and 120 feet from the high water mark on the lagoon side.

The mark is a standard Holmes & Narver bronze disk set in a concrete block flush with the surface.

Reference marks are standard Holmes & Narver bronze disks in concrete blocks flush with the surface.

DESCRIBED BY FPC

MARKED BY

114

~~OFFICIAL USE ONLY~~

L. Hammond

167

~~OFFICIAL USE ONLY~~

RECOVERY NOTE TRIANGULATION STATION

Name of Station CORAL Location Eniwetok Lagoon
Eniwetok Atoll

Established by J.T.F.-7 Year 1947-48 Marshall Islands

Recovered by LSH Year 1949-50

Detailed description as to fitness of original description:

This station was recovered and found to be in good condition.

The station is located atop a circular concrete cell that is fifteen feet in diameter, about 2 miles east-southeast of the Reef Photo Tower, about 5 miles west of Runit Island and 0.15 mile west of buoy No. 15. The disk is a standard USC&GS station disk set in the center of the structure about 11 feet above M.L.W. stamped CORAL, and is surrounded by a sheet metal wall that projects 3 feet above the deck of the structure.

A 14 foot wooden tower was used for observations at this station.

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 4-42

~~OFFICIAL USE ONLY~~

RECOVERY NOTE TRIANGULATION STATION

Name of Station ELGIN (Engebi) Location Engebi Island
Eniwetok Atoll
Established by J.T.F.-7 Year 1947-48 Marshall Islands
Recovered by LSH Year 1949-50

Detailed description as to fitness of original description:

This station was recovered and found to be in good condition.

The station is located on Engebi Island approximately 900 feet north of south end of island, 500 feet west of seaward side and 300 feet east of the lagoon, 130 feet south of a concrete building. The disk is a standard USC&GS station disk set in a 12 X 12 inch concrete block flush with surface and is stamped ELGIN.

This station has been re-named "ENGEBI" and is also bench mark No. 1 for this island.

RM No. 1 was set at a distance of 50.00 feet 15.240 M from the station at an azimuth of 105°-11'-10".

RM No. 2 was set at a distance of 50.00 feet 15.240 M from the station at an azimuth of 195°-11'-10".

These reference marks are standard Holmes & Narver bronze disks set in concrete blocks flush with the surface.

A 40 foot steel tower was used for observations at this point.

117

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No 640

~~OFFICIAL USE ONLY~~

RECOVERY NOTE TRIANGULATION STATION

Name of Station CRAFLEX Location Aoman Island
Eniwetok Atoll
Established by J.T.F.-7 Year 1947-48 Marshall Islands

Recovered by LSH Year 1949-50

Detailed description as to fitness of original description:

This station has been destroyed.

118

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

RECOVERY NOTE TRIANGULATION STATION

Name of Station KODAK (Aniyaanii) Location Aniyaanii Island
Eniwetok Atoll
Established by J.T.F.-7 Year 1947-48 Marshall Islands

Recovered by LSH Year 1949-50

Detailed description as to fitness of original description:

This station has been recovered and found to be in good condition. The station has been renamed Aniyaanii and is located about 600 feet south of the north edge of vegetation in a small clearing on the lagoon side of Aniyaanii Island, 80 feet south of the north edge of the clearing, 125 feet east of the high water mark on the lagoon beach and 755 feet north of the northwest leg of a 75 foot steel tower. The marker is a standard USC&GS station disc set in a concrete block flush with the surface and stamped KODAK.

Reference mark No. 1 is set at a distance of 57.398 feet 17.495 M from the station at an azimuth of 214°-55'42.6".

Reference mark No. 2 is set at a distance of 110.819 feet 33.778 M from the station at an azimuth of 326°-01'-28.6".

These reference marks are standard USC&GS reference discs set in a concrete block flush with the surface.

Note: This station has been reset. See Restoration Note Triangulation Station of June 7, 1951.

119

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

RECOVERY NOTE TRIANGULATION STATION

Name of Station NORTH BASE Location Runit Island
Eniwetok Atoll
Established by USN Year 1944 Marshall Islands

Recovered by LSH Year 1949-50

Detailed description as to fitness of original description:

This station was recovered and the results of the present survey determine that the marker has been disturbed.

The marker was used in its existing position and a new description and location of reference marks are included under description of triangulation stations.

120

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No. 640

~~OFFICIAL USE ONLY~~

RECOVERY NOTE TRIANGULATION STATION

Name of Station PHOTO (Reef Photo Tower) Location Eniwetok Lagoon
Eniwetok Atoll
Marshall Islands

Established by J.T.F.-7 Year 1947-48

Recovered by LSH Year 1949-50

Detailed description as to fitness of original description:

This station recovered and found to be in good condition.

The station is a 4 leg 75 foot steel tower constructed atop 4 steel piles encased in concrete at tide range, located on a coral reef approximately 7 statute miles south of Engebi Island, 7 miles west of the north end of Runit Island and 2 miles west-northwest of station Coral.

The marker is a nail set in the wood deck at the intersection of the diagonals of the opposite legs of the tower. This wood deck is approximately 10 feet above M.L.W.

The light was mounted on a wood tripod 4.5 feet above the deck.

This station was not occupied due to excessive vibration.

121

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB No 640

~~OFFICIAL USE ONLY~~

RECOVERY NOTE TRIANGULATION STATION

Name of Station PRIVILEGE (Eniwetok) Location Eniwetok Island
Eniwetok Atoll
Marshall Islands

Established by USN Year 1944

Recovered by LSH Year 1949-50

Detailed description as to fitness of original description:

This station was recovered and found to be in good condition. The station has been renamed ENIWETOK and is also BM No. 1 for this island.

The station is located on the north end of Eniwetok Island, 225 feet from the north end of the island, 70 feet west of the high water line on the seaward side and 90 feet east of the high water mark on the lagoon side. It is 30 feet north of a large Quonset building and is under a steel tripod which is Beacon B.

The marker is a standard USN triangulation disk set in an 8 X 8 inch concrete block flush with the surface.

Reference mark No. 1 is set at a distance of 39.12 feet 11.924 M from the station and an azimuth of 62°-46'-17.4".

Reference mark number 2 is set at a distance of 39.12 feet 11.924 M from the station and an azimuth of 332°-46'-17.4".

These reference marks are standard Holmes & Narver bronze disks set in concrete blocks flush with the surface.

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB NO 640 ~~OFFICIAL USE ONLY~~

RECOVERY NOTE TRIANGULATION STATION

Name of Station RUNIT Location Runit Island
Eniwetok Atoll
Established by J.T.F.-7 Year 1947-48 Marshall Islands

Recovered by LSH Year 1949-50

Detailed description as to fitness of original description:

This station was recovered and found to be in good condition.

The station is located approximately 900 feet north of the end of the sand spit at the south end of the island, 120 feet west of the high water mark on the seaward side of the island and 70 feet east of the high water mark on the lagoon side. The disk is a standard USC&GS station disk set in a 12 X 12 inch concrete block flush with the surface and is stamped RUNIT.

Reference mark No. 1 is 41.075 feet north-northwest of the station.

Reference mark No. 2 is 48.062 feet east of the station.

These reference marks are standard USC&GS reference disks set flush with the surface.

The station mark is approximately 9 feet above M.L.W. and a 20 foot wooden tower was used for observations.

123

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB NO. 540

~~OFFICIAL USE ONLY~~

RECOVERY NOTE TRIANGULATION STATION

Name of Station SAND Location So. of Runit Island
Eniwetok Atoll
Established by USN Year 1944 Marshall Islands

Recovered by LSH Year 1949-50

Detailed description as to fitness of original description:

This station was recovered and found to be in good condition.

The station is located on the third sand island south of Runit Island, about 450 feet south of the north end of the island and 68 feet east of the high water mark on the lagoon side. The disc is a standard USN triangulation disc set in an 8 X 8 inch concrete block flush with the surface.

A 14 foot wooden tower was used for observations at this station.

As this is a remote location with limited land area no reference marks were set.

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB NO. 640

~~OFFICIAL USE ONLY~~

RECOVERY NOTE TRIANGULATION STATION

Name of Station **STEEL** Location **Parry Island**
Eniwetok Atoll
Marshall Islands

Established by **USN** Year **1944**

Recovered by **LSH** Year **1949-50**

Detailed description as to fitness of original description:

This station located on the north end of Parry Island has been destroyed.

Station PARRY of the present survey is in the approximate location of this station.

Vertical Control

As no records are available of vertical control established here by previous surveys a temporary datum is being established on each of the project islands as surveys are made. This datum may be described as follows.

"A datum approximating mean low wate r springs was arrived at by applying corrections from the U.S. Coast and Geodetic publication "Tide Tables of the Pacific Ocean" to a series of tidal observations. This is a temporary datum but should be significant to less than a foot".

The procedure is to erect a tide staff at a suitable location at each island and take periodical observations as surveys are made at these islands. After applying corrections a mean of these corrected observations is accepted as the temporary datum. This datum is transferred to a permanent monument in the vicinity which becomes the point of origin of all vertical control on the particular island.

At a later date when personnel are available at these locations a longer series of observations will be taken and corrections applied to the datum. It is not anticipated that any temporary datum now in use will be refined by more than a few tenths of a foot.

When datums are established at all project islands a further check can be made by taking simultaneous observations at all tide staffs to check the relation between the individual datums. Due to little knowledge of currents in the lagoon it is doubtful if any refinement of the individual datums can be made by this method.

A list of the bench marks follows:

Aaraanbiru -- To be established at later date.

Aomon -- Triangulation station Aomon - Elev. 8.61

Biijiri -- Traverse station Biijiri - Elev. 7.67

Bogallua -- Triangulation station Boga - Elev. 7.14

Bokonaarappu -- Triangulation station Bokon - Elev. 10.40

Engebi -- Triangulation station Engebi (Elgin) - Elev. 10.08

Eniwetok -- Triangulation station Eniwetok - Elev. 10.34

Kirinian -- To be established at later date.

Muzinbaarikku -- To be established at later date.

Parry -- Triangulation station Parry - Elev. 9.80

Piiraai -- Triangulation station Piiraai - Elev. 8.80

Rojoa -- To be established at later date. Existing elevations are referenced to Traverse station Biijiri.

Runit -- Traverse station Runit - Elev. 12.95

Teiteiripucchi -- Triangulation station Teiteir - Elev. 8.60

The monuments at all points listed are bronze disks set in concrete blocks flush with the surface and these locations will be shown in topographical maps of the islands involved.

EXPANSION OF HORIZONTAL CONTROL SURVEY

ENIWETOK ATOLL

MARSHALL ISLANDS

1951

The primary horizontal control network furnished the basic controls from which the relations of test structures were determined. The scheme was expanded to include the photo stations at sites M, N, P and Q; C, E and V Zero points, and the islands of Bogon and Rigili. The islands of Muzin and Aaraanbiru were located from controls established in the local Zero areas.

General Features

The specifications and criteria for second order triangulation were followed in expanding the scheme. While the strength of figure was weak in some cases, additional observations were taken which offset the weakness.

All observations were made at night, and standard procedure was attempted throughout. Weather conditions and interference from construction and scientific work in the tower areas affected the survey, but the results are considered consistent with requirements.

A quadrilateral was developed including station Bokon, thereby increasing the strength of this station over the single triangle by which it was previously located. The adjusted values vary slightly from those recorded from the previous survey.

Station Islet was also strengthened by inclusion in a quadrilateral with no change in the values previously recorded.

The location of station Rigili is to third order accuracy, which conforms with instructions regarding location of this station.

Field Computations

Computations of the expanded scheme were made at the jobsite. While adjustments to balance out observing errors were not made, the results were within scientific requirements.

Photo Tower Triangulation Report

A report was issued on May 18, 1951, including the relation of the photo tower to the Zero points. The values are listed as computed from the control network and also from check computations based on observations made at the structure sites. This report is included.

Adjusted Data

Adjusting of the expanded scheme has been completed, and the adjusted values are included in this report. The value of the length of each line is independent of the route followed in the computation.

All observations, including the check observations at the structure sites, were evaluated and used in the adjustments. While this data varies from the values given in the photo tower triangulation report, the differences are small and assure that the values given in this report are within requirements.

In the interests of economy, these computations are not included in this report. The sketches included record the adjusted values determining the inter-relation of the various stations.

The computations and field notes will be a part of the permanent survey records at the jobsite.

HOLMES & NARVER ENGINEERS JOB NO. 640

~~OFFICIAL USE ONLY~~

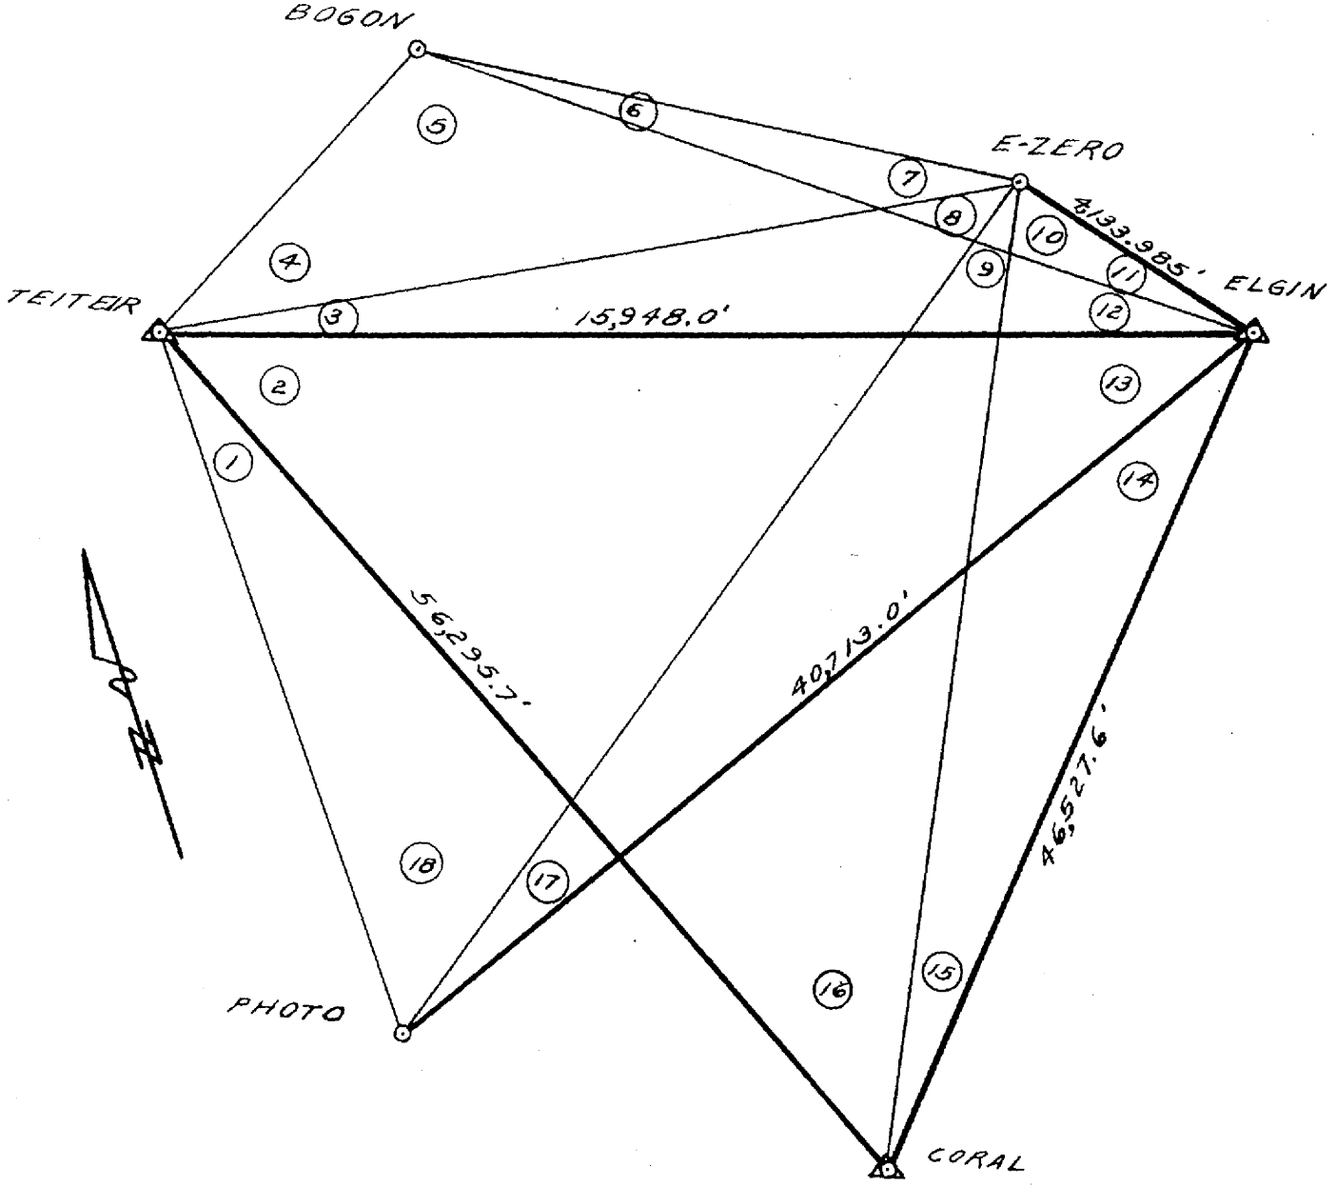

NOT TO SCALE

PRIMARY TRIANGULATION
SECONDARY TRIANGULATION

~~OFFICIAL USE ONLY~~

ADJUSTED ANGLES

(1)	11°-53'-57.0"	(10)	27°-00'-18.6"
(2)	45°-29'-32.3"	(11)	21°-05'-09.8"
(3)	9°-34'-12.5"	(12)	9°-14'-16.6"
(4)	15°-27'-04.3"	(13)	103°-20'-29.0"
(5)	145°-44'-26.6"	(14)	17°-01'-02.1"
(6)	10°-22'-23.1"	(15)	2°-18'-43.9"
(7)	8°-26'-06.0"	(16)	11°-50'-12.7"
(8)	97°-41'-52.4"	(17)	3°-55'-35.9"
(9)	15°-24'-10.1"	(18)	15°-20'-25.8"

ADJUSTED DISTANCES

E-ZERO - BOGON	8,260.1'
E-ZERO - TEITEIR	12,554.4'
E-ZERO - PHOTO	43,669.8'
E-ZERO - CORAL	50,172.9'
ELGIN - BOGON	11,982.3'
TEITEIR - BOGON	4,548.0'
TEITEIR - PHOTO	47,027.0'

HOLMES & NARVER ENGINEERS JOB NO. 640

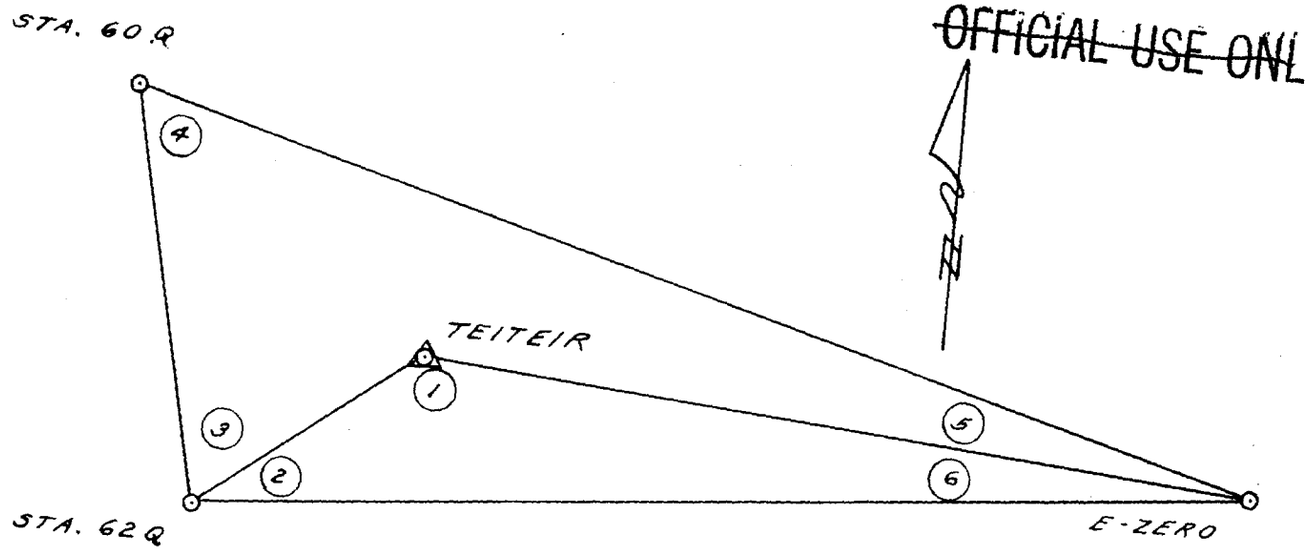

ADJUSTED ANGLES

1	177° - 08' - 02.5"
2	2° - 49' - 17.6"
3	101° - 54' - 50.0"
4	70° - 18' - 23.5"
5	4° - 54' - 49.0"
6	0° - 02' - 39.9"

ADJUSTED DISTANCES

TEITEIR	- E-ZERO	12,554.4'
TEITEIR	- 62 Q	191.62'
60 Q	- 62 Q	1,170.0'
E-ZERO	- 60 Q	13,092.3'
E-ZERO	- 62 Q	12,745.8'

HOLMES & NARVER ENGINEERS JOB NO. 640

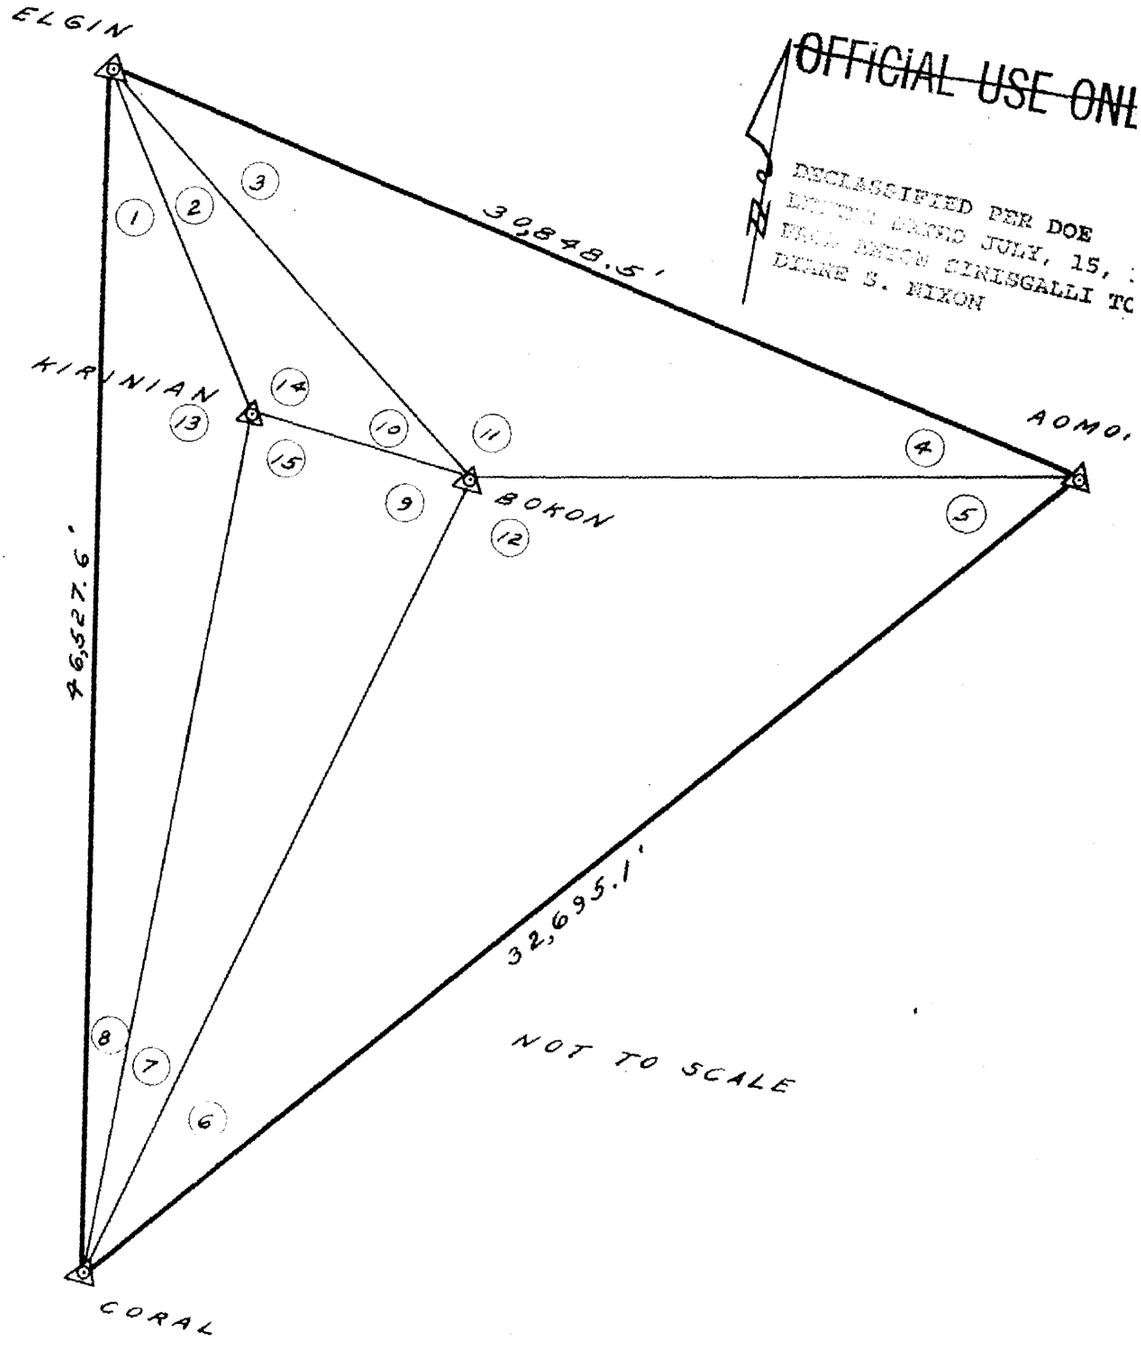

NOT TO SCALE

PRIMARY TRIANGULATION
SECONDARY TRIANGULATION

ADJUSTED ANGLES

(1)	24°-14'-40.9"	(9)	125°-39'-52.8"
(2)	9°-51'-23.2"	(10)	8°-56'-51.1"
(3)	10°-23'-55.0"	(11)	162°-23'-50.9"
(4)	7°-12'-14.1"	(12)	62°-59'-25.2"
(5)	86°-53'-44.9"	(13)	152°-12'-33.2"
(6)	30°-06'-49.9"	(14)	161°-11'-45.7"
(7)	7°-44'-26.1"	(15)	46°-35'-41.1"
(8)	3°-32'-45.9"		

ADJUSTED DISTANCES

BOKON	- ELGIN	12,791.9'
BOKON	- AOMON	18,412.0'
BOKON	- CORAL	36,643.9'
BOKON	- KIRINIAN	6,793.4'
KIRINIAN	- CORAL	40,978.1'
KIRINIAN	- ELGIN	6,172.3'

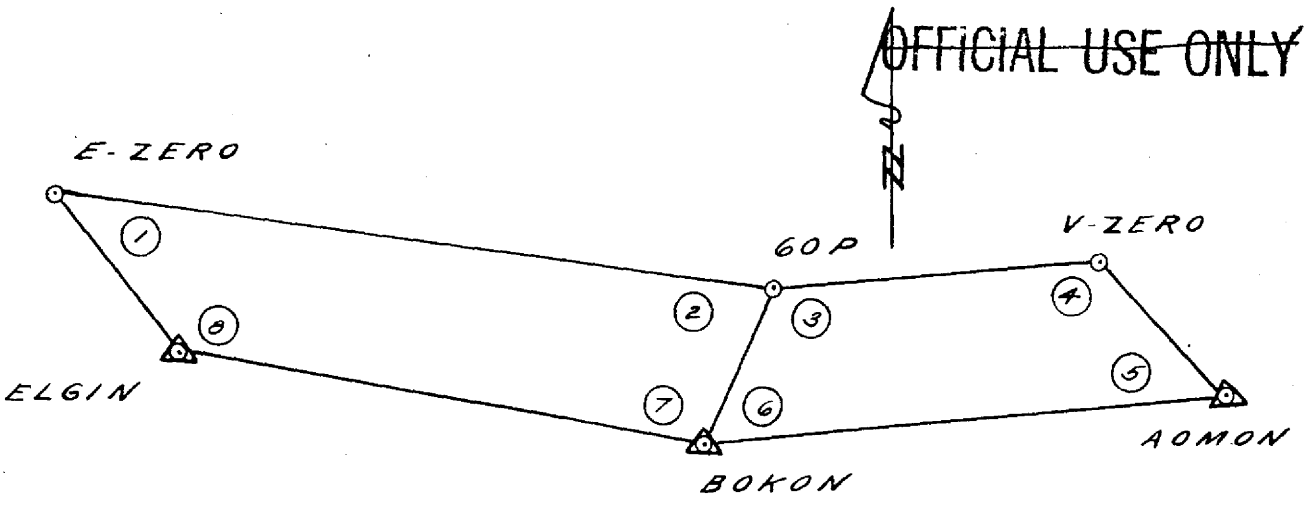

ADJUSTED ANGLES

(1)	4°-07'-18.6"	(5)	12°-32'-11.9"
(2)	84°-41'-40.0"	(6)	66°-25'-47.9"
(3)	116°-36'-55.9"	(7)	95°-58'-03.0"
(4)	164°-25'-04.3"	(8)	175°-12'-58.4"

ADJUSTED DISTANCES

60P	- E-ZERO	16,928.2'
60P	- V-ZERO	14,330.1'
60P	- BOKON	150.0'
ELGIN	- E-ZERO	4,133.985'
ELGIN	- BOKON	12,791.9'
AOMON	- BOKON	18,412.0'
AOMON	- V-ZERO	4,140.9'

HOLMES & NARVER ENGINEERS JOB NO. 640

~~OFFICIAL USE ONLY~~

DECLASSIFIED PER DOE
LETTER DATED JULY, 15, 1994
FROM ANTON SIRISCALLI TO
DIANE S. NIXON

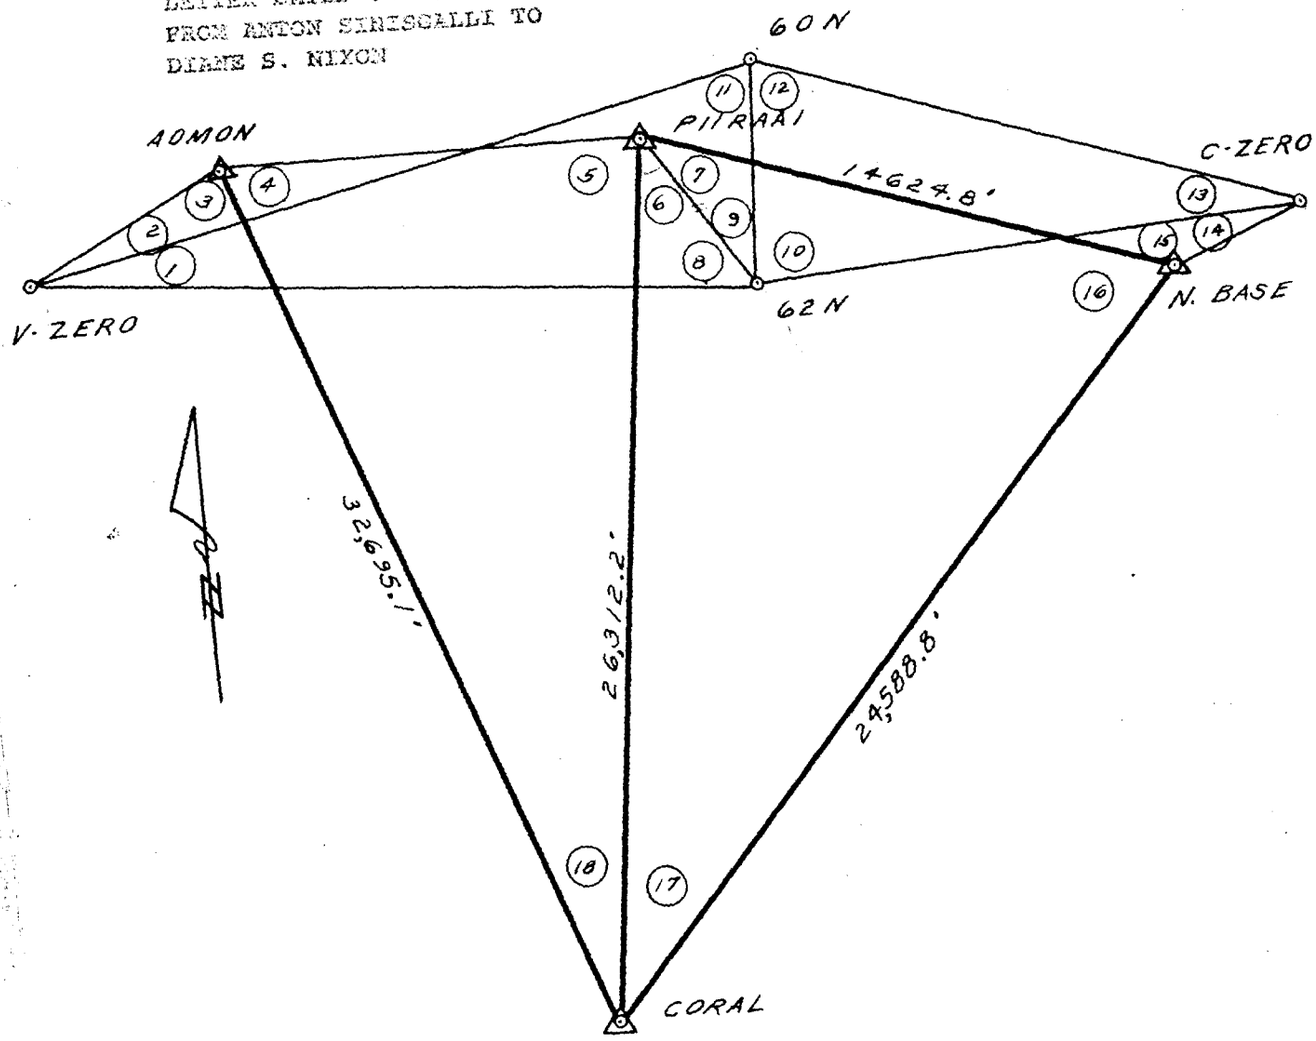

NOT TO SCALE

PRIMARY TRIANGULATION
SECONDARY TRIANGULATION

~~OFFICIAL USE ONLY~~

ADJUSTED ANGLES

(1)	4°-05'-06.5"	(10)	106°-30'-24.2"
(2)	21°-28'-00.5"	(11)	98°-55'-43.2"
(3)	99°-25'-56.8"	(12)	69°-42'-03.2"
(4)	45°-56'-26.9"	(13)	3°-47'-32.6"
(5)	116°-45'-13.6"	(14)	45°-41'-26.3"
(6)	38°-43'-21.4"	(15)	132°-24'-33.0"
(7)	28°-12'-19.1"	(16)	79°-53'-48.7"
(8)	33°-35'-54.3"	(17)	33°-10'-30.8"
(9)	43°-23'-16.0"	(18)	17°-18'-19.5"

ADJUSTED DISTANCES

V-ZERO	- AOMON	4,140.9'
V-ZERO	- 60 N	14,393.4'
V-ZERO	- 62 N	14,593.9'
C-ZERO	- 60 N	15,255.6'
C-ZERO	- 62 N	14,923.1'
PIIRAAI	- 62 N	123.28'
PIIRAAI	- AOMON	10,891.6'
60 N	- 62 N	1,052.4'
N. BASE	- C-ZERO	591.27'

HOLMES & NARVER ENGINEERS JOB NO. 640

~~OFFICIAL USE ONLY~~

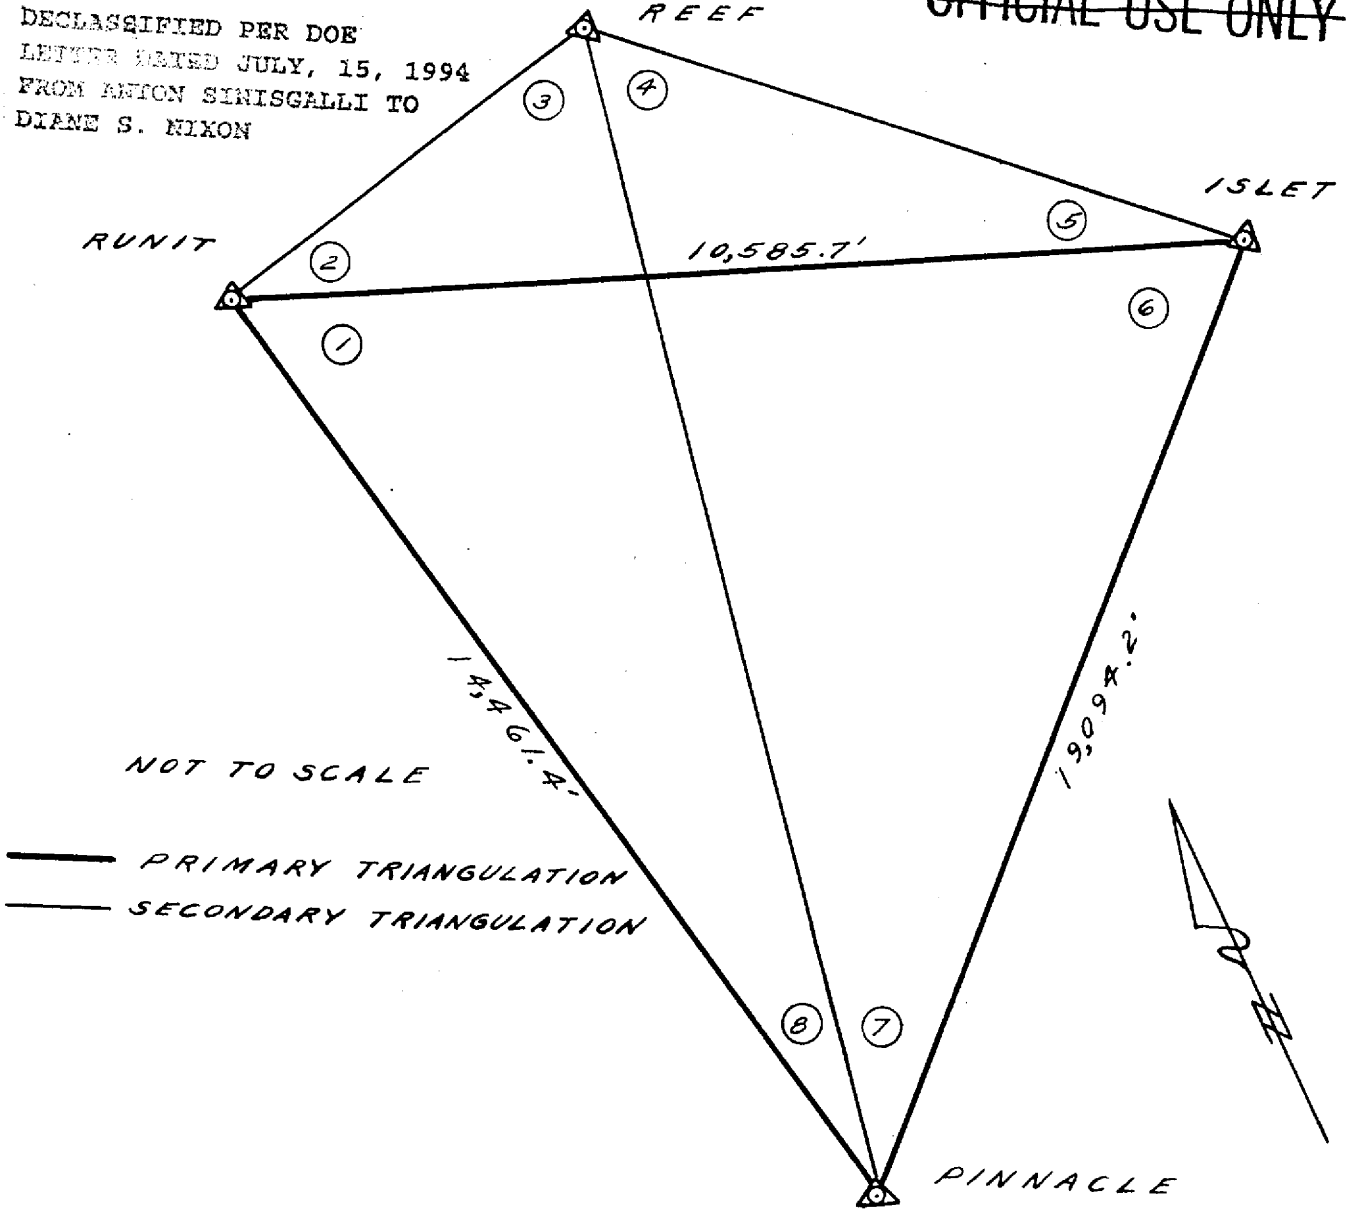

ADJUSTED ANGLES

(1)	98°-08'-56.6"	(5)	4°-22'-35.6"
(2)	7°-10'-07.2"	(6)	48°-33'-58.9"
(3)	60°-36'-29.4"	(7)	19°-12'-37.7"
(4)	107°-50'-47.8"	(8)	14°-04'-26.8"

ADJUSTED DISTANCES

REEF - RUNIT	4,036.2'
REEF - ISLET	6,600.3'
REEF - PINNACLE	16,008.2'

~~OFFICIAL USE ONLY~~

HOLMES & NARVER ENGINEERS JOB NO. 640

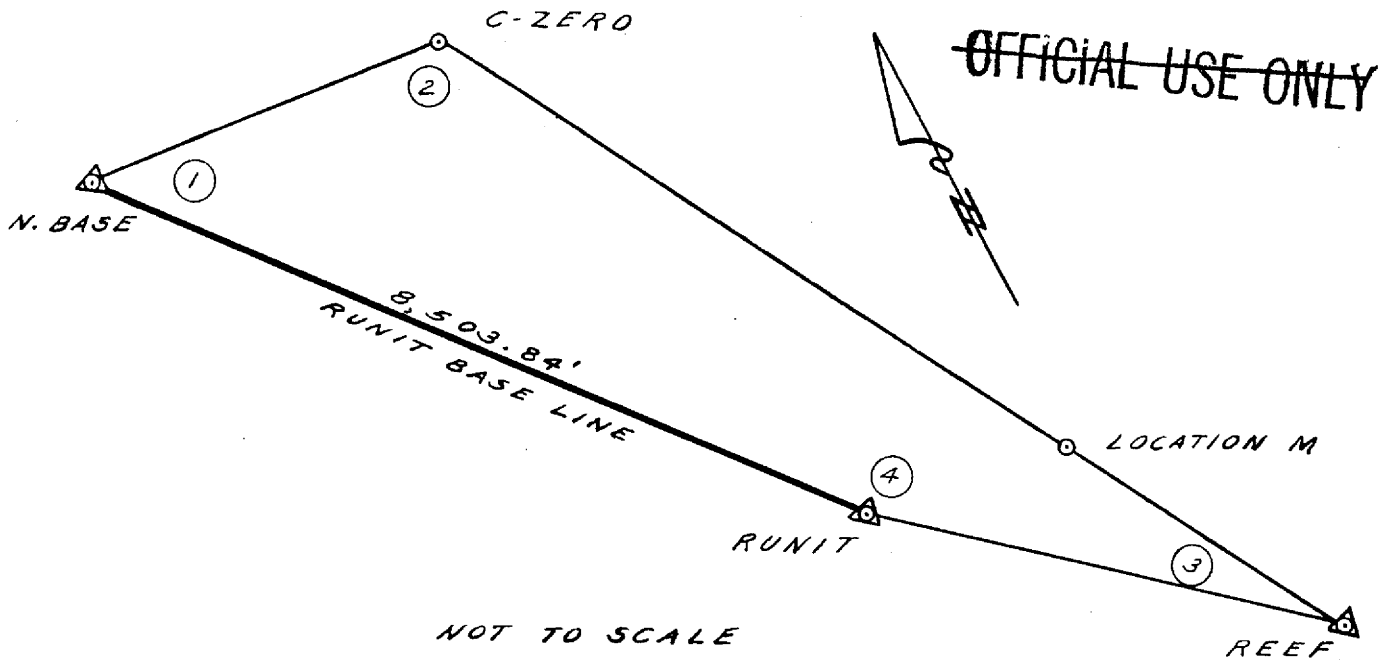

NOT TO SCALE

PRIMARY TRIANGULATION

SECONDARY TRIANGULATION

ADJUSTED ANGLES

(1)	35°-26'-55.9"
(2)	142°-25'-55.4"
(3)	0°-39'-13.8"
(4)	181°-27'-54.9"

ADJUSTED DISTANCES

N. BASE - C-ZERO	591.27'
C-ZERO - LOC. M	12,000.0'
LOC. M - REEF	65.27'
REEF - RUNIT	4,036.2'

HOLMES & NARVER ENGINEERS JOB NO. 640

~~OFFICIAL USE ONLY~~

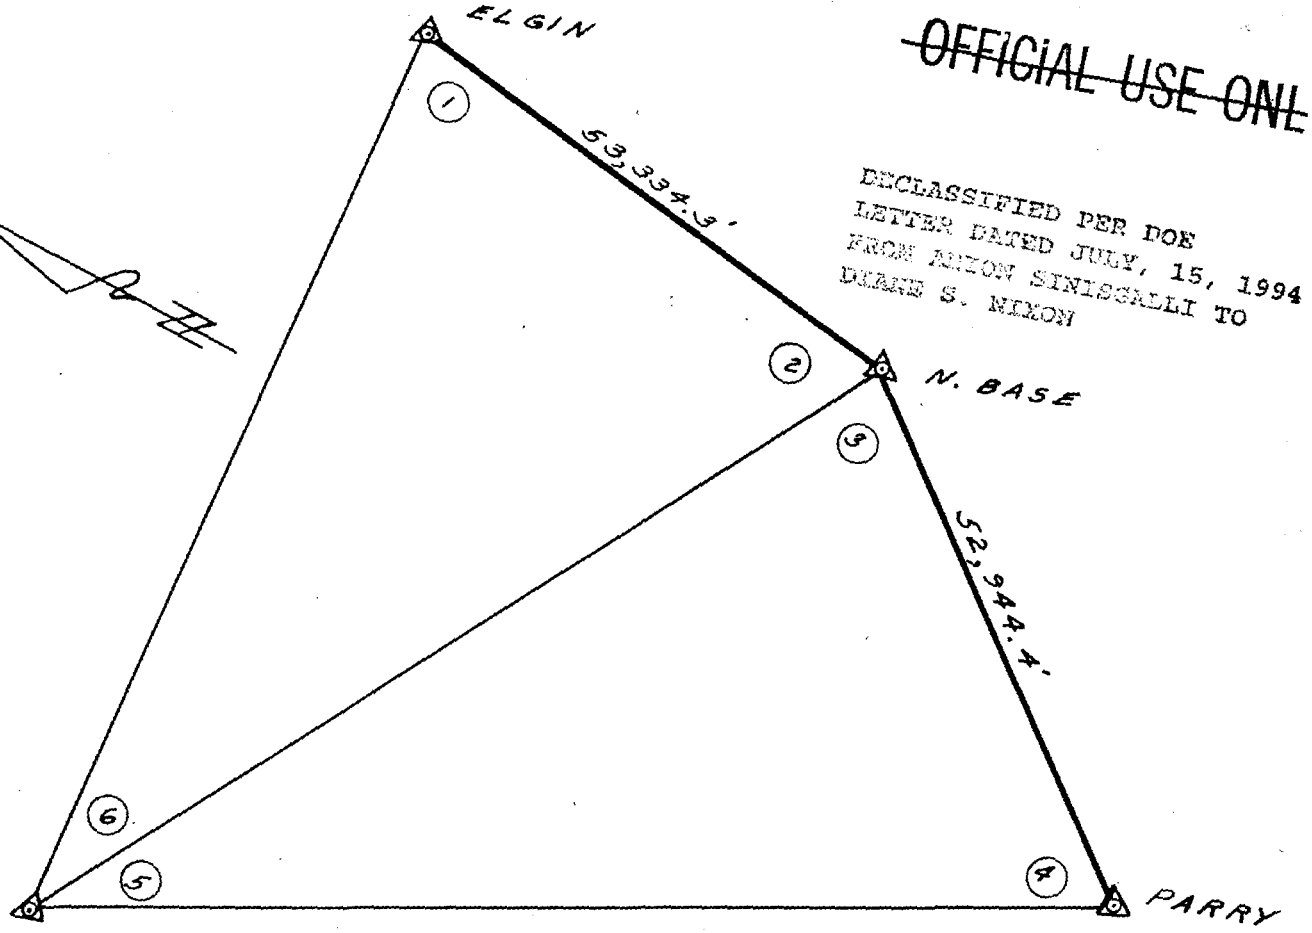

NOT TO SCALE

PRIMARY TRIANGULATION
SECONDARY TRIANGULATION (3rd ORDER)

ADJUSTED ANGLES

(1)	81°-04'-39.2"	(4)	69°-53'-17.5"
(2)	66°-20'-35.1"	(5)	30°-32'-11.1"
(3)	79°-34'-31.4"	(6)	32°-34'-45.7"

ADJUSTED DISTANCES

RIGILI - ELGIN	90,724.7'
RIGILI - N. BASE	97,849.7'
RIGILI - PARRY	102,483.7'

~~OFFICIAL USE ONLY~~

FINAL VALUES · GEOGRAPHIC · POSITIONS

Locality ENIBUTOK, Marshall Islands 2nd order triangulation Astro *Datum.* *State* Pacific Ocean USE HOMOTOK - 1944 Archive No. 305697/1

STATIONS	LATITUDE ° ′ ″	Seconds in Meters	LONGITUDE ° ′ ″	Seconds in Meters
✗ ENIBUTOK ASTRO. PIER	11 33 23.480	721.446	162 21 10.250	310.575
NORTH BASE	11 33 21.265	714.840	162 21 09.890	299.467
✗ SOUTH BASE	11 32 02.826	86.834	162 22 04.920	149.086
✗ REEF	11 32 19.328	593.872	162 17 10.786	326.837

AZIMUTH ° ′ ″	BACK AZIMUTH ° ′ ″	TO STATIONS	DISTANCE Meters	LOGARITHMS.	
238 44 57.63	58 44 57.70	ENIBUTOK ASTRO PIER	12.747	1.105	4216
325 59 32.56	145 59 43.57	SOUTH BASE	2981.41	3.474	4211
327 56 52.40	147 57 15.77	SAND	6680.87	3.824	8331
74 50 08.53	254 49 20.67	REEF	7506.61	3.875	4441
111 40 18.15	321 39 33.90	CAMELLIA	10,753.90	4.031	5685
161 55 55.27	341 55 44.00	GARDENIA	5483.79	3.739	0812
329 31 31.66	149 31 44.01	SAND	3702.60	3.568	5068
357 21 58.31	177 22 01.87	LILAC	11,830.00	4.072	9854
93 15 50.99	273 14 52.17	REEF	8927.19	3.950	7152
145 59 43.57	325 59 32.56	NORTH BASE	2981.41	3.474	4211
145 31 45.84	325 30 39.85	SAGE	17,555.80	4.244	4200
166 43 51.92	346 43 32.85	ASTER	12,519.30	4.097	5798
183 09 24.19	03 09 27.99	CAMELLIA	10,415.70	4.017	6901
217 40 25.76	37 41 02.45	GARDENIA	9069.22	3.957	5698
254 49 20.67	74 50 08.53	NORTH BASE	7506.61	3.875	4441
273 14 52.17	93 15 50.99	SOUTH BASE	8927.19	3.950	7152
288 54 26.68	108 55 37.81	SAND	11,407.00	4.057	1732
322 29 18.30	142 30 20.43	LILAC	15,535.40	4.191	3221
16 04 44.63	196 04 04.93	LANTANA	21,909.70	4.340	6342

Do not write in this margin.

FINAL VALUES GEOGRAPHIC POSITIONS

Locality ENIWETOK, Marshall Islands — Bell-taylor triangulation — ASTRO Datum. — State Pacific Ocean — DSH ENIWETOK - 1944 — Archive No. 305697/1

STATIONS	LATITUDE ° ′	Seconds in Meters	LONGITUDE ° ′	AZIMUTH ° ′ ″	BACK AZIMUTH ° ′ ″	TO STATIONS	DISTANCE Meters	LOGARITHMS.	
				08 47 42.82	188 47 34.07	LILAC	8728.98	3.940	9636
				44 11 17.84	224 09 27.65	LANTANA	24,196.90	4.383	7598
				208 55 37.81	288 54 26.68	REEF	11,407.00	4.057	1733
				147 57 15.77	327 56 52.40	NORTH BASE	6680.87	3.824	8331
				149 31 44.01	329 31 31.64	SOUTH BASE	3704.60	3.568	5068
				16 30 25.30	196 30 11.84	PRIVILEGE	7268.86	3.861	4665
				60 40 24.82	240 38 43.69	LANTANA	17,813.50	4.250	7502
				142 30 20.43	322 29 18.30	REEF	15,535.40	4.191	3221
				177 22 01.87	357 21 58.31	SOUTH BASE	11,830.00	4.072	9854
				188 47 34.07	08 47 42.82	SAND	8728.98	3.940	9636
				337 48 00.17	157 48 04.42	STEEL	1722.19	3.236	0804
				196 04 04.93	16 04 44.63	REEF	21,909.70	4.340	6362
				224 09 27.65	44 11 17.84	SAND	24,196.90	4.383	7598
				240 38 43.69	60 40 24.82	LILAC	17,813.50	4.250	7502
				246 11 28.67	66 13 13.97	STEEL	17,682.70	4.247	5474
				262 32 38.16	82 34 05.60	PRIVILEGE	13,579.20	4.132	8757
				26 48 36.39	206 48 18.70	PRIVILEGE	6022.03	3.779	7427
				66 13 13.97	246 11 28.67	LANTANA	17,682.70	4.247	5474
				157 48 04.42	337 48 00.17	LILAC	1722.19	3.236	0804
				82 34 05.60	262 32 38.16	LANTANA	13,579.20	4.132	8757
				196 30 11.84	16 30 25.30	LILAC	7268.86	3.861	4665
				206 48 18.70	26 48 36.39	STEEL	6022.03	3.779	7427

[illegible]	11 30 18.966	582.719	162 23 06.883	208.596					
LILAC	11 25 38.210	1174.040	162 22 22.853	692.709					
LANTANA	11 20 54.124	1663.814	162 13 50.661	1536.143					
STEEL	11 26 46.334	1422.998	162 22 44.319	1343.530					
PRIVILEGE	11 21 51.383	1578.743	162 21 14.736	446.800					

Do not write in this margin.

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

U.S.C. & G.S. FINAL VALUES

GEOGRAPHIC POSITIONS

Locality ENIBETOK, Marshall Islands 2nd order triangulation Astro *Datum.* *State* Pacific Ocean USS BOWDITCH - 1944 Archive No. 305697/1

STATIONS.	LATITUDE.	Seconds in Meters.	LONGITUDE.	Seconds in Meters.
PETUNIA	11 38 59.362	1823.957	162 09 40.134	1215.740
SAGE	11 40 10.824	317.215	162 11 42.721	1293.934
ZINNIA	11 40 40.638	1248.643	162 13 06.822	206.611
ASTER	11 38 55.900	1717.583	162 15 35.924	1088.011
CAMELLIA	11 37 57.805	1776.116	162 17 29.721	909.279
GARDENIA	11 36 12.938	387.539	162 20 13.749	416.526

AZIMUTH	BACK AZIMUTH	TO STATIONS	DISTANCE. Meters.	LOGARITHMS.
239 34 23.79	59 34 48.57	SAGE	4305.72	3.634 0460
243 33 46.69	63 34 28.48	ZINNIA	6990.82	3.844 5280
270 33 20.46	90 34 32.30	ASTER	10,777.10	4.032 5004
59 34 48.57	239 34 23.79	PETUNIA	4305.72	3.634 0459
249 54 41.89	69 54 58.90	ZINNIA	2712.13	3.433 3102
287 55 58.27	107 56 45.39	ASTER	7424.24	3.870 6519
291 10 00.03	111 11 10.10	CAMELLIA	11,271.60	4.052 9852
325 30 39.85	145 31 45.84	BEET	17,555.80	4.244 4200
63 34 28.48	243 33 46.69	PETUNIA	6990.82	3.844 5280
69 54 58.90	249 54 41.89	SAGE	2712.13	3.433 3102
305 28 14.03	125 28 44.17	ASTER	5545.29	3.743 9238
90 34 32.30	270 33 20.46	PETUNIA	10,777.10	4.032 5004
107 56 45.39	287 55 58.27	SAGE	7424.24	3.870 6519
125 28 44.17	305 28 14.03	ZINNIA	5545.29	3.743 9238
297 22 24.29	117 22 47.25	CAMELLIA	3881.83	3.589 0367
346 43 32.85	166 43 51.92	BEET	12,519.30	4.097 5798
03 09 27.99	183 09 24.19	BEET	10,635.70	4.027 6901
111 11 10.10	291 10 00.03	SAGE	11,271.60	4.052 9852
117 22 47.25	297 22 24.29	ASTER	3881.83	3.589 0368
302 57 25.15	122 57 58.18	GARDENIA	5922.17	3.772 4806
321 39 33.90	141 40 18.15	NORTH BASE	10,753.90	4.031 5685
37 41 02.45	217 40 25.76	BEET	9049.22	3.957 5698
122 57 58.18	302 57 25.15	CAMELLIA	5922.17	3.772 4806
341 55 44.08	161 55 55.27	NORTH BASE	5483.79	3.739 0812

Do not write in this margin.

Do not write in this margin.

31 OCT 1947

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

DECLASSIFIED PER DOE
LETTER DATED JULY, 15, 1994
FROM ANION SCHIOCALLI TO
DIANE S. NIXON

~~OFFICIAL USE ONLY~~

...ER DATED JULY, 15, 1994
...M ANTON SINISGALLI TO
...NE S. NIXON

GEOGRAPHIC POSITIONS — ENIWETOK ATOLL — 1 of 2

...GEODETIC INFORMATION...

DATUM ...North American 1927... SPHEROID OF REFERENCE ...Clarke 1866... ARCHIVE NUMBER 305 697/2 SHIP AND YEAR USS BOWDITCH (AGS) 1946

STATION	ELEVATION (Feet)	LATITUDE (N) AND LONGITUDE (W)	SECONDS TO METERS	AZIMUTH	BACK AZIMUTH	TO STATION	DISTANCE LOGARITHM (Meters)	DISTANCE METERS
ENIWETOK ASTRO PIER		11 33 23.480	721.4					
		162 21 10.250	310.6					
NORTH BASE		11 33 23.265	714.8	238 44 57.63	58 44 57.70	ENIWETOK ASTRO PIER	1.105 4216	12.767
		162 21 09.890	299.7					
SAND		11 30 18.981	583.2	147 57 15.76	327 56 52.40	NORTH BASE	3.824 7980	6 680.33
		162 23 06.873	208.3					
SOUTH BASE		11 32 02.832	87.0	329 31 31.64	149 31 44.01	SAND	3.568 4716	3 702.30
		162 22 04.915	148.9	145 59 43.57	325 59 32.56	NORTH BASE	3.474 3860	2 981.17
KEY		11 32 19.334	594.1	254 49 20.68	74 50 08.53	NORTH BASE	3.875 4091	7 [illegible].01
		162 17 10.805	327.4	273 14 52.18	93 15 50.99	SOUTH BASE	3.950 6801	8 926.48
				288 54 26.09	108 55 37.82	SAND	4.057 1382	11 406.13
LILAC		11 25 38.248	1175.2	142 30 20.43	322 29 18.31	KEY	4.191 2870	15 534.13
		162 22 22.847	692.6	177 22 01.87	357 21 58.31	SOUTH BASE	4.072 9503	11 829.06
				188 47 34.07	8 47 42.83	SAND	3.940 9286	8 727.28
LANTANA		11 20 54.185	1664.8	196 04 04.94	16 04 44.64	KEY	4.340 6011	21 907.92
		162 13 50.695	1537.2	224 09 27.66	44 11 17.85	SAND	4.383 7247	24 194.95
				240 38 43.70	60 40 24.82	LILAC	4.250 7152	17 812.10
STAKE		11 24 46.356	1424.3	66 33 13.97	246 31 28.68	LANTANA	4.247 5124	17 681.23
		162 22 44.311	1343.3	157 48 04.42	337 48 00.17	LILAC	3.236 0452	1 722.05
PRIVILEGE		11 21 51.639	1580.5	82 34 05.60	262 32 38.17	LANTANA	4.132 8407	13 578.15
		162 21 14.785	446.8	196 30 11.84	16 30 25.30	LILAC	3.861 4315	7 268.28
				206 48 18.70	26 48 36.39	STAKE	3.779 7076	6 021.54

This document consists of 17 pages
No. 1 of 1 copies, Series A

1 NO CHECK ON THIS POSITION. ABBREVIATIONS USED: d = DESTROYED, o = MARKED, n = NOT ... (illegible) ... PROBABLY. EXAMPLES: n. d. = NOT DESCRIBED, p. l. = PROBABLY LOST)

SECURITY INFORMATION

1681

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

USE ONLY

GEODETIC POSITIONS SECURITY INFORMATION

DATUM NORTH AMERICAN 1983 ORDER OF TRIANGULATION 2nd 2 OF

NAME OF TRIANGULATION 395 697/1 SHIP AND YEAR DMS [illegible]

STATION	ELEVATION (Feet)	LATITUDE AND LONGITUDE	SECONDS IN METERS	AZIMUTH	BACK AZIMUTH	TO STATION	DISTANCE	
							LOGARITHM (Meters)	METERS
GARDENIA		11 36 12.925	397.1	343 55 44.01	161 55 55.27	NORTH BASE	3.739 0461	5 483.35
		162 20 13.753	636.6	37 41 02.46	217 40 25.77	[illegible]	3.957 5347	9 068.48
CAMELLIA		11 37 57.783	1775.4	302 57 25.16	122 57 58.19	GARDENIA	3.772 4435	5 921.69
		162 17 29.738	900.9	321 39 [illegible].91	141 40 18.15	NORTH BASE	4.031 5334	10 753.09
				3 09 28.00	183 09 24.20	[illegible]	4.017 6550	10 414.90
ASTER		11 38 55.872	1716.7	297 22 24.30	117 22 47.26	CAMELLIA	3.589 0017	3 881.52
		162 15 35.947	1088.8	346 43 [illegible].86	166 43 51.93	[illegible]	4.097 5447	12 518.28
BASE		11 40 10.291	316.2	287 55 58.28	107 56 45.40	ASTER	3.870 6168	7 423.64
		162 11 42.766	1295.3	291 10 09.04	111 11 10.11	CAMELLIA	4.051 9501	11 220.68
				325 30 39.86	145 31 45.85	[illegible]	4.244 3849	17 554.36
ZINNIA		11 40 40.602	1247.5	305 28 14.94	125 28 46.18	ASTER	3.743 8887	5 544.84
		162 13 06.860	307.8	69 54 58.91	249 54 41.90	BASE	3.633 2751	2 711.91
PETUNIA		11 38 59.335	1823.1	239 34 23.81	59 34 48.58	BASE	3.634 0109	4 305.37
		162 09 40.193	1217.6	243 33 46.71	63 34 28.69	ZINNIA	3.844 4939	6 959.25
				270 33 20.48	90 34 32.31	ASTER	4.032 4653	10 776.19

This document consists of 14 pages
No. 1 of 1 copies, Series A

NAD

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

...ER DATED JULY, 15, 1994 ...
... ANTON SINISGALLI TO
DIANE S. NIXON

WINDSOR ATOLL
Secondaries

1 of 2

STATION	ELEVATION (Feet)	LATITUDE AND LONGITUDE	SECONDS IN METERS	AZIMUTH	BACK AZIMUTH	TO STATION	DISTANCE	
							LONGITUDE (Seconds)	METERS
[illegible]		11 25 32.317	992.9	39 56 16.2	219 56 08.4	STEEL	3.265 2288	1 841.7
		162 23 23.310	706.6	95 40 47.2	275 40 35.2	LILAC	3.265 2722	1 841.9
[illegible]		11 28 23.685	727.7	28 51 17.5	208 56 59.3	LILAC	3.764 1124	5 809.1
		162 23 55.622	1685.8	157 21 45.5	337 21 35.8	SAND	3.584 1352	3 838.3
VIC		11 23 40.154	1233.7	71 51 35.0	251 49 53.7	LANTANA	4.213 9545	16 366.5
		162 22 23.626	716.3	179 37 37.0	359 37 36.8	LILAC	3.559 7334	3 620.6
WIL		11 23 46.372	1424.8	33 04 50.8	213 04 35.8	PRIVILEGE	3.624 7354	4 214.4
		162 22 30.602	927.8	176 05 14.8	356 05 13.3	LILAC	3.537 2693	3 445.5
ZED		11 22 38.969	1197.3	77 34 59.7	257 33 24.7	LANTANA	4.174 8561	14 957.4
		162 21 52.445	1590.1	189 29 51.7	9 29 57.8	LILAC	3.747 0201	5 585.0
TOP		11 21 22.637	695.5	86 06 17.9	266 04 54.7	LANTANA	4.108 2668	12 831.2
		162 20 52.985	1603.5	199 08 53.9	19 09 11.8	LILAC	3.919 8006	8 313.8
NED		11 20 44.349	1362.6	209 06 49.5	29 07 13.3	LILAC	4.014 3623	10 336.2
		162 19 35.959	1090.4	235 11 11.5	55 11 30.8	PRIVILEGE	3.557 6152	3 610.9
LOOK		11 20 39.720	1220.4	92 15 38.2	272 14 24.7	LANTANA	4.053 7963	11 318.7
		162 20 03.690	111.9	204 41 48.2	24 42 15.8	LILAC	4.006 1541	10 096.1
ROD		11 21 29.930	918.4	253 02 32.0	73 04 41.0	STEEL	4.316 3417	20 717.7
		162 21 50.611	1534.6	286 45 49.0	106 46 12.7	LANTANA	3.580 1039	3 802.8
JRIN		11 22 33.846	1039.9	259 58 21.8	80 00 52.0	STEEL	4.369 7967	23 431.3
		162 10 03.189	96.7	293 55 49.8	113 56 34.7	LANTANA	3.877 7862	7 547.2
RIG		11 27 40.366	1240.2	296 30 49.5	116 33 38.2	LOOK	4.461 3201	22 948.1
		162 05 50.005	1215.7	310 33 49.5	130 35 24.7	LANTANA	4.282 9888	19 186.2

This document consists of 14 pages
No. 1 of 1 copies Series A

531

~~OFFICIAL USE ONLY~~

OFFICIAL USE ONLY

[illegible] PER DOE
[illegible] MAY 15, 1994
[illegible] TO
DIANE S. [illegible]

~~OFFICIAL USE ONLY~~

SECRET (WHEN DATA) JULY 15, 1994

FOR JOHN SINISGALLI IG

EAST	11 40 08.841	271.6	346 18 11.4	146 18 11.3	ASTER	3.430	5177	2	694.7
	162 14 46.589	1411.1	72 02 56.6	252 01 24.5	PETUNIA	3.978	7671	9	522.9
WEST	11 39 45.994	1413.2	316 54 10.7	136 24 20.3	ASTER	3.844	6763	2	429.2
	162 14 48.375	1465.2	81 16 37.7	261 15 35.5	PETUNIA	3.975	1534	9	443.9
RADAR-ZINNIA 1	11 40 28.298	869.5	301 20 57.4	121 37 28.4	ASTER	3.735	2267	5	448.3
	162 13 02.904	82.7	65 58 53.4	245 58 13.5	PETUNIA	3.826	9896	8	716.1
DOG	11 40 58.920	974.1	75 53 13.5	255 53 15.8	PETUNIA	3.942	0823	8	793.6
	162 14 20.787	632.6	90 30 32.5	270 29 28.6	SAGE	3.679	9941	4	756.2
EAT[1]	11 39 36.201	1112.3	85 15 50.7	263 14 46.8	PETUNIA	3.984	2873	9	644.7
	162 14 56.410	1798.6	120 07 51.7	280 07 12.6	SAGE	3.772	0922	5	927.9
STEEL TOWER-ENTRETOK LA	11 20 47.559	1661.3	91 04 50.5	271 03 38.7	LANTANA	4.037	1637	10	893.4
	162 19 49.891	1512.8	207 26 03.5	27 26 33.8	LILAC	4.002	7529	10	063.6

This document consists of 11 pages
No. 1 of 1 copies, Series A

[1] NO CHECK ON THIS POSITION

ABBREVIATIONS USED: A = ASTER; B = MARKER; C = NOT

A = RECOVERED; L = LOST; P = PROBABLY RECOVERED; R = NOT RECOVERED; U = PROBABLY LOST

SECRET (WHEN DATA)

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~

~~OFFICIAL USE ONLY~~