

~~CONFIDENTIAL~~

WT-1619

This document consists of 128 pages.

No. 87 of 235 copies, Series A

411005

*Operation*

# HARDTACK

*April - October 1958*

DECLASSIFIED BY: CHIEF, ISCM *DNA*

DATE: *8 Aug 90*

SIGNATURE: *[Signature]*

Project 2.1

SHIPBOARD RADIATION FROM UNDERWATER BURSTS (U)

Issuance Date: March 24, 1961

HEADQUARTERS FIELD COMMAND  
DEFENSE ATOMIC SUPPORT AGENCY  
SANDIA BASE, ALBUQUERQUE, NEW MEXICO

*473*

*2 copies  
1 copy to 36213 (a)  
Receipt ack.*


4050698-61

~~CONFIDENTIAL~~  
This material contains information affecting the national defense of the United States within the meaning of the espionage laws, Title 18, U.S.C., and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law.

FILE COPY

RETURN TO CODE 423

*232 D  
The DNA  
HAS 5/10/70  
R/S  
STAN T  
[Signature]*

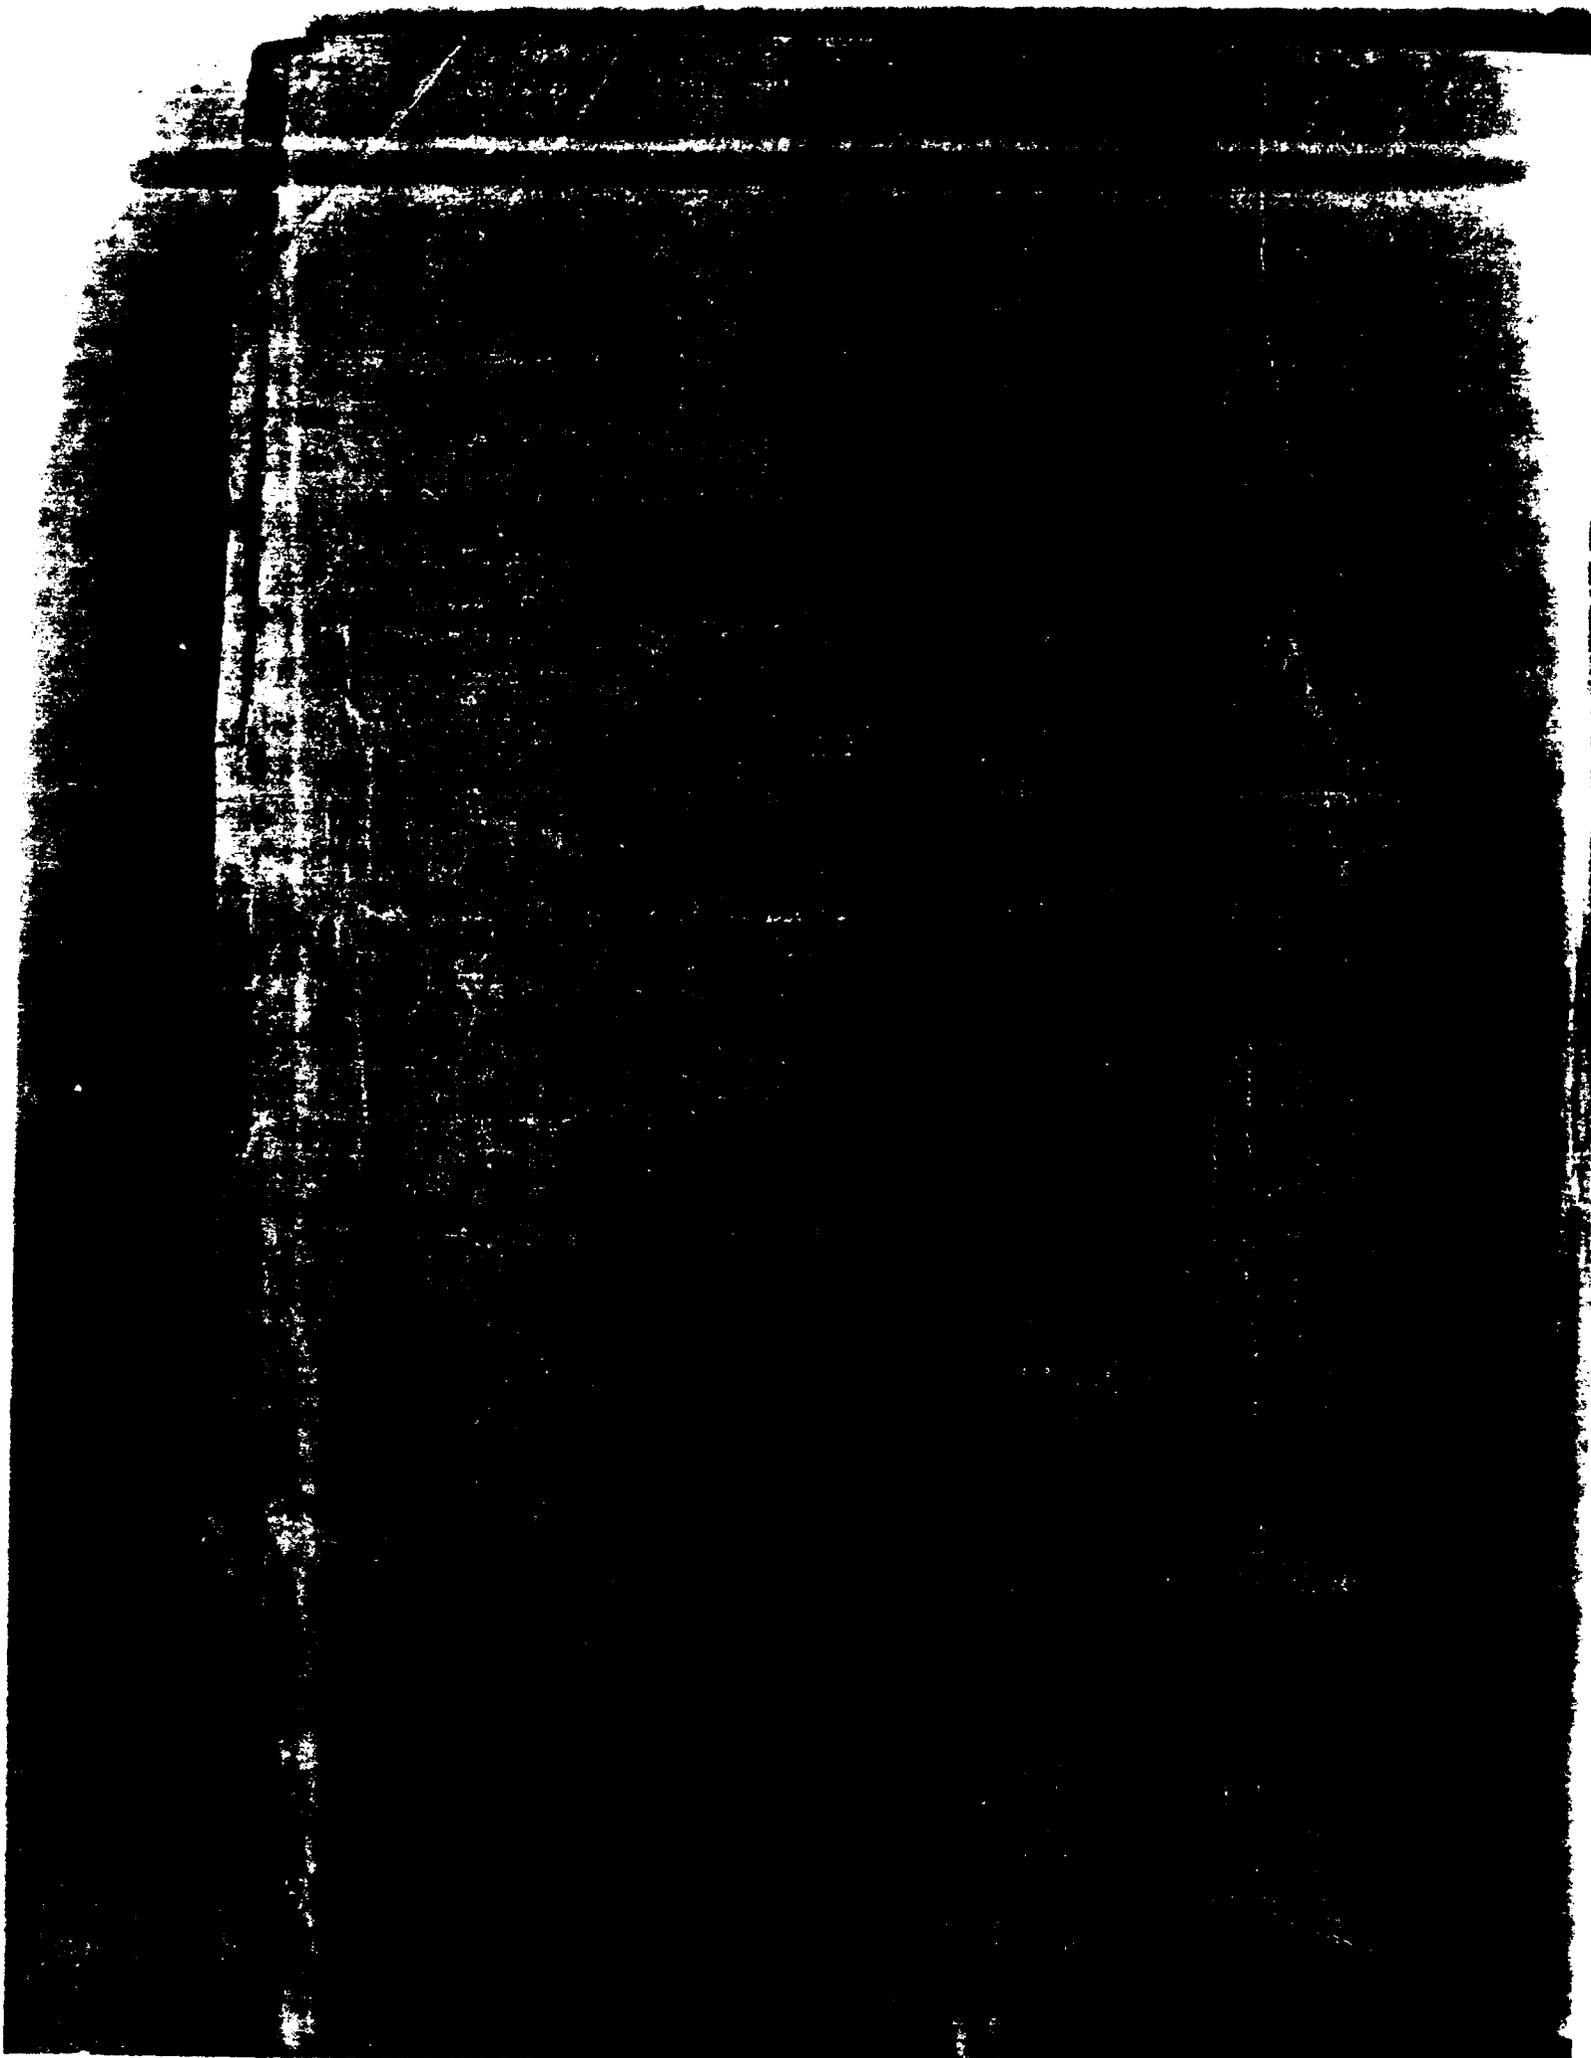

~~CONFIDENTIAL~~

WT-1619

OPERATION HARDTACK—PROJECT 2.1

SHIPBOARD RADIATION FROM UNDERWATER BURSTS (U)

M. M. Bigger, Project Officer  
H. R. Rinnert  
H. A. Zagorites

U. S. Naval Radiological  
Defense Laboratory  
San Francisco, California

This material contains information affecting the national defense of the United States within the meaning of the espionage laws Title 18, U. S. C., Secs. 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law.

3-4

~~CONFIDENTIAL~~

4050698-61

## ABSTRACT

The principal objectives were: (1) the determination of total gamma-radiation dose and dose-rate histories aboard three moored ships (destroyers) exposed to radiological environments at locations of possible operational interest about the surface zeros of two underwater nuclear detonations, Shots Wahoo and Umbrella; (2) estimation of remote-source gamma-radiation dose and dose-rate histories at exposed weather-deck locations aboard ship; (3) estimation of total gamma-radiation dose and dose-rate histories in the water adjacent to the ships; and (4) measurement of gamma-ionization decay of a fallout sample collected on one ship a few minutes after each shot.

The ships, which were equipped with operating washdown systems, were instrumented with film badges and gamma-intensity-time recorders (GITR's). The film badges and unshielded GITR's supplied radiation data at locations representing major battle stations; GITR's submerged in the water supplied some data on underwater radiation; and a fallout collector connected to a fully shielded GITR supplied gamma-ionization decay data.

Radiation histories were obtained on only one ship for Shot Wahoo. Although histories were obtained on all three ships for Shot Umbrella, some data was lost because of shock damage.

At least 95 percent of the total dose observed on the washed weather decks was attributed to radiation from airborne radioactivity. After Shot Umbrella, weather-deck dose accumulation (to 75 percent of final values) ranged between 600 r received within H+26 seconds at 1,900 feet from surface zero and 50 r received within H+150 seconds at 7,900 feet from surface zero. After Shot Wahoo, the dose accumulation was slower, but the final deck doses were about 300 r higher, despite the fact that the ships were from 1,000 to 2,000 feet farther away from surface zero than was the case for Shot Umbrella. For nuclear-weapon-delivery situations simulated by the two closer-in ships, temporary immobilization could result in lethal or near-lethal doses.

After Shot Wahoo, the majority of compartments received doses in excess of 500 r aboard the closest ship and in excess of 200 r aboard the next-to-closest ship. After Shot Umbrella, the two ships received doses in excess of 200 r in many compartments.

Ratios of dose or dose rate in compartments to dose or dose rate on washed weather decks were dependent upon changes in radiation-source geometries and upon the presence of contaminants within the ships. The long-term dose ratios ranged between 0.1 and 0.7 for nonmachinery spaces, and between 0.02 and 0.2 for machinery spaces.

Although radiation from the water may have influenced the compartment/deck dose-rate ratios to a considerable degree at later times, the contribution of contaminated water to the total dose observed aboard the ships was probably of little significance.

After Shot Umbrella, gamma-ionization decay was measured for the periods between H+0.1 and 11.5 hours and between H+23.0 and 34.9 hours. No decay measurements were obtained for Shot Wahoo.

## FOREWORD

This report presents the final results of one of the projects participating in the military-effect programs of Operation Hardtack. Overall information about this and the other military-effect projects can be obtained from ITR-1660, the "Summary Report of the Commander, Task Unit 3." This technical summary includes: (1) tables listing each detonation with its yield, type, environment, meteorological conditions, etc.; (2) maps showing shot locations; (3) discussions of results by programs; (4) summaries of objectives, procedures, results, etc., for all projects; and (5) a listing of project reports for the military-effect programs.

## PREFACE

Project 2.1 gratefully acknowledges its indebtedness to the following organizations and personnel for their contributions to the project:

W. B. Lane, U. S. Naval Radiological Defense Laboratory, for the general concept and details he developed for collection of early-time decay samples.

R. K. Fuller, Project 2.2, for implementing the collection and handling of the early decay sample in the field.

Task Unit 6 of Task Group 7.1, for furnishing and processing the 1,700 film badges used for technical measurements.

Personnel of Task Element 7.3.1.5, the Task Group 7.3 Decontamination Unit, who showed a high degree of initiative and cooperation in installing the film badges aboard ship, in sample recovery, and in sorting and handling the many film badges required.

The officers and crews of the Task Group 7.3 Special Projects Unit, who manned the three target ships, for their frequent and cheerful assistance in maintaining support equipment, accomplishing repair and alteration work, and furnishing work parties when requested.

F. K. Kawahara, Project 2.2, for much needed help in reducing the gamma-radiation data required for the final report.

CONTENTS

ABSTRACT ----- 5

FOREWORD ----- 6

PREFACE----- 6

CHAPTER 1 INTRODUCTION----- 13

    1.1 Objectives----- 13

    1.2 Terminology----- 13

    1.3 Background and Theory----- 13

CHAPTER 2 PROCEDURE----- 15

    2.1 Target Ships ----- 15

    2.2 Instrumentation ----- 15

        2.2.1 Gamma-Intensity-Time Recorders (GITR's)----- 15

        2.2.2 GITR Installations ----- 16

        2.2.3 Gamma-Ionization Decay Unit ----- 16

        2.2.4 GITR Calibration and Maintenance ----- 17

        2.2.5 Film Badges ----- 17

    2.3 Operations ----- 17

    2.4 Data Requirements----- 18

        2.4.1 Data Obtained by Project 2.1 ----- 18

        2.4.2 Data Reduction ----- 18

        2.4.3 Data from Other Projects ----- 19

CHAPTER 3 RESULTS AND DISCUSSION ----- 26

    3.1 Total Doses and Dose Rates Aboard Target Ships----- 26

        3.1.1 Weather-Deck GITR Data ----- 26

        3.1.2 Compartment GITR Data ----- 27

        3.1.3 Film-Badge Data ----- 28

    3.2 Remote-Source Gamma Radiation ----- 29

    3.3 Total Gamma Radiation in Adjacent Water ----- 29

    3.4 Gamma-Ionization Decay ----- 30

CHAPTER 4 CONCLUSIONS AND RECOMMENDATIONS ----- 78

    4.1 Conclusions----- 78

        4.1.1 Total Gamma Radiation Aboard Target Ships ----- 78

        4.1.2 Remote-Source Gamma Radiation ----- 78

        4.1.3 Total Gamma Radiation in Adjacent Water ----- 78


    4.2 Recommendations----- 79

REFERENCES----- 80

APPENDIX A GITR INSTRUMENT ----- 82

-effect  
-effect  
k Unit  
type,  
ssions  
projects:

er-  
i de-  
ecay  
sed  
nowed  
sample  
three  
it, ac-  
data

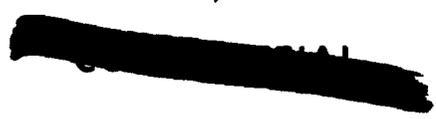

A.1	Detector Unit	82
A.2	Recorder System	82
A.3	Design Limits for Operation	83
A.4	Shock Mounting	83
A.5	Remote-Starting Circuit	83
APPENDIX B GITR CALIBRATION		87
B.1	Biased-Field Calibrations	87
B.2	Corrections for Calibration Bias	87
APPENDIX C FILM-BADGE DATA, CALIBRATION, AND ESTIMATES OF ERROR		99
C.1	Calibration	99
C.2	Estimates of Error	99
APPENDIX D TABULATIONS OF GAMMA-RADIATION HISTORIES		126
TABLES		
2.1	GITR Dose-Rate Ranges	19
3.1	Twenty-Four-Hour Gamma Doses at GITR Stations, Based Upon GITR Data	31
3.2	Compartments Probably Influenced by Ingress of Radioactive Contaminants	31
3.3	Average 24-Hour Gamma Doses Aboard Target Ships, Based Upon Film-Badge Data	32
3.4	Ratios of Gamma Dose in Compartments to Dose on Weather Decks, Based Upon Average Film-Badge Data	33
3.5	Athwartship Variation of 24-Hour Gamma Doses Aboard DD 474, Based Upon Average Film-Badge Data	33
3.6	Athwartship Variation of 24-Hour Gamma Doses Aboard DD 592, Based Upon Average Film-Badge Data	34
3.7	Athwartship Variation of 24-Hour Gamma Doses Aboard DD 593, Based Upon Average Film-Badge Data	34
3.8	Comparisons of 24-Hour GITR and Film-Badge Doses at GITR Stations	35
3.9	Comparisons of GITR and Film-Badge Ratios of Dose at GITR Stations to Average Dose on Weather Decks	35
3.10	Estimated Dose Contributed by Remote-Source Radiation Observed on Washed Weather Decks of the Target Ships	36
4.1	Summary of Gamma Radiation Data for Washed Weather Decks	79
B.1	Directional Response of Low-Range GITR Detector (Inside 0.13-Inch Aluminum Drum) to Beams of Various Radiations	89
B.2	Directional Response of High-Range GITR Detector (Inside 0.13-Inch Aluminum Drum) to Beams of Various Radiations	89
B.3	Directional Response of Low-Range GITR Detector (With 0.13-Inch Aluminum Jacket) to Beams of Various Radiations	90
B.4	Directional Response of High-Range GITR Detector (With 0.13-Inch Aluminum Jacket) to Beams of Various Radiations	90
B.5	Directional Response of Low-Range Detector (Mounted Inside GITR Case) to Beams of Various Radiations	91
B.6	Directional Response of High-Range Detector (Mounted Inside GITR Case) to Beams of Various Radiations	91
B.7	Gamma Dose Rates Contributed by Various Intervals of Assumed Gamma-Energy Spectra	92

-- 82	B.8 Gamma Dose Rates Contributed by Various Intervals of Assumed	
-- 82	Gamma-Energy Spectra-----	92
-- 83	B.9 GITR Bias-Correction Factors-----	92
-- 83	C.1 Twenty-Four-Hour Gamma Doses in 5-Inch Powder Magazine-----	100
-- 83	C.2 Twenty-Four-Hour Gamma Doses in Forward Quarters-----	100
	C.3 Twenty-Four-Hour Gamma Doses in Crew's Mess-----	101
-- 87	C.4 Twenty-Four-Hour Gamma Doses in Pilot House and Chart House-----	101
	C.5 Twenty-Four-Hour Gamma Doses in Radio Central-----	102
-- 87	C.6 Twenty-Four-Hour Gamma Doses in Forward Fireroom (Upper Level)-----	102
-- 87	C.7 Twenty-Four-Hour Gamma Doses in Forward Fireroom (Lower Level)-----	102
	C.8 Twenty-Four-Hour Gamma Doses in Forward Engine Room (Upper Level)-----	103
-- 99	C.9 Twenty-Four-Hour Gamma Doses in Forward Engine Room (Lower Level)-----	103
-- 99	C.10 Twenty-Four-Hour Gamma Doses in Galley-----	104
-- 99	C.11 Twenty-Four-Hour Gamma Doses in Aft Fireroom (Upper Level)-----	104
	C.12 Twenty-Four-Hour Gamma Doses in Aft Fireroom (Lower Level)-----	104
-- 126	C.13 Twenty-Four-Hour Gamma Doses in Aft Engine Room (Upper Level)-----	105
	C.14 Twenty-Four-Hour Gamma Doses in Aft Engine Room (Lower Level)-----	105
	C.15 Twenty-Four-Hour Gamma Doses on Main Deck (Midship)-----	105
	C.16 Twenty-Four-Hour Gamma Doses in Crew's Washroom-----	106
-- 19	C.17 Twenty-Four-Hour Gamma Doses in Aft Quarters-----	106
	C.18 Twenty-Four-Hour Gamma Doses on Main Deck (Fantail)-----	106
-- 31	C.19 Twenty-Four-Hour Gamma Doses in Steering Gear Room-----	107
-- 31	C.20 Standard Errors of Film-Badge Dose Averages-----	107

FIGURES

-- 32	2.1 Target ship array, Shot Wahoo-----	20
-- 33	2.2 Target ship array, Shot Umbrella-----	20
-- 33	2.3 Location and designation of GITR stations on target ships-----	21
	2.4 GITR detector foundations-----	22
-- 34	2.5 GITR recorder and cooling installations-----	23
	2.6 Underwater GITR station-----	24
- 34	2.7 Gamma-ionization decay unit-----	24
- 35	2.8 Area locations of film badges on target ships-----	25
- 35	3.1 Example of estimating average dose rates on deck of DD 474 for period of GITR saturation, Shot Umbrella-----	36
- 36	3.2 Average gamma dose rates on weather decks of target ships, Shot Umbrella---	37
- 79	3.3 Average gamma doses on weather decks of target ships, Shot Umbrella-----	38
- 89	3.4 Average gamma dose rates on weather decks of DD 593, Shots Wahoo and Umbrella-----	39
- 89	3.5 Average gamma doses on weather decks of DD 593, Shots Wahoo and Umbrella-----	40
- 90	3.6 Ratios of dose in compartments to average dose on weather decks of DD 474, Shot Umbrella-----	41
- 90	3.7 Ratios of dose in compartments to average dose on weather decks of DD 474, Shot Umbrella-----	42
- 91	3.8 Ratios of dose in compartments to average dose on weather decks of DD 592, Shot Umbrella-----	43
- 91	3.9 Ratios of dose in compartments to average dose on weather decks of DD 592, Shot Umbrella-----	44
- 92	3.10 Ratios of dose in compartments to average dose on weather decks of DD 592, Shot Umbrella-----	45
	3.11 Ratios of dose in compartments to average dose on weather decks of DD 592, Shot Umbrella-----	46

3.12 Ratios of dose in compartments to average dose on weather decks of DD 592, Shot Umbrella -----	47
3.13 Ratios of dose in compartments to average dose on weather decks of DD 592, Shot Umbrella -----	48
3.14 Ratios of dose in compartments to average dose on weather decks of DD 592, Shot Umbrella -----	49
3.15 Ratios of dose in compartments to average dose on weather decks of DD 593, Shot Umbrella -----	50
3.16 Ratios of dose in compartments to average dose on weather decks of DD 593, Shot Umbrella -----	51
3.17 Ratios of dose in compartments to average dose on weather decks of DD 593, Shot Wahoo -----	52
3.18 Ratios of dose in compartments to average dose on weather decks of DD 593, Shot Wahoo -----	53
3.19 Ratios of dose rate in compartments to average dose rate on weather decks of DD 474, Shot Umbrella -----	54
3.20 Ratios of dose rate in compartments to average dose rate on weather decks of DD 474, Shot Umbrella -----	55
3.21 Ratios of dose rate in compartments to average dose rate on weather decks of DD 474, Shot Umbrella -----	56
3.22 Ratios of dose rate in compartments to average dose rate on weather decks of DD 474, Shot Umbrella -----	57
3.23 Ratios of dose rate in compartments to average dose rate on weather decks of DD 592, Shot Umbrella -----	58
3.24 Ratios of dose rate in compartments to average dose rate on weather decks of DD 592, Shot Umbrella -----	59
3.25 Ratios of dose rate in compartments to average dose rate on weather decks of DD 592, Shot Umbrella -----	60
3.26 Ratios of dose rate in compartments to average dose rate on weather decks of DD 592, Shot Umbrella -----	61
3.27 Ratios of dose rate in compartments to average dose rate on weather decks of DD 592, Shot Umbrella -----	62
3.28 Ratios of dose rate in compartments to average dose rate on weather decks of DD 592, Shot Umbrella -----	63
3.29 Ratios of dose rate in compartments to average dose rate on weather decks of DD 592, Shot Umbrella -----	64
3.30 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Umbrella -----	65
3.31 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Umbrella -----	66
3.32 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Umbrella -----	67
3.33 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Wahoo -----	68
3.34 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Wahoo -----	69
3.35 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Wahoo -----	70
3.36 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Wahoo -----	71
3.37 Decay-corrected average dose rates on weather decks of DD 474, Shot Umbrella -----	72

47	3.38	Decay-corrected average dose rates on weather decks of DD 592, Shot Umbrella -----	73
48	3.39	Decay-corrected average dose rates on weather decks of DD 593, Shot Umbrella -----	74
49	3.40	Decay-corrected average dose rates on weather decks of DD 593, Shot Wahoo -----	75
50	3.41	Ratios of dose rate in adjacent water to average dose rate on weather decks of DD 593, Shot Umbrella -----	76
51	3.42	Gamma-ionization decay of contaminant collected in 6-inch-thick lead cave on DD 592, Shot Umbrella -----	77
52	A.1	GITR Model 103 instrument with the outer watertight case cover removed. The detector is shown mounted on main instrument assembly-----	85
53	A.2	GITR Model 103 instrument with watertight case -----	85
54	A.3	Block diagram of GITR Model 103 with remote detector -----	86
54	A.4	Simplified schematic diagram of GITR Model 103 recycling electrometer -----	86
55	A.5	Block diagram of GITR triggering system for target ships -----	86
56	B.1	GITR Model 103 low-range detector output pulse period as a function of gamma intensity for $\text{Co}^{60}$ and $\text{Cs}^{137}$ -----	93
56	B.2	GITR Model 103 high-range detector output pulse period as a function of gamma intensity for $\text{Co}^{60}$ and $\text{Cs}^{137}$ -----	93
57	B.3	Energy-response characteristics of the GITR Model 103 detector for parallel-beam radiations -----	94
58	B.4	Directional-response characteristics of the GITR Model 103 remote detector for parallel-beam radiation ( $\text{Cs}^{137}$ ) -----	94
59	B.5	Directional response of remote GITR detector (with 0.13-inch aluminum jacket) to 70-keV X-ray and $\text{Co}^{60}$ radiation beams -----	95
60	B.6	GITR station response to monoenergetic radiation when radiation is horizontally incident compared with GITR response to $\text{Cs}^{137}$ radiation beam directed vertically at top of bare detector -----	95
61	B.7	GITR station response to monoenergetic radiation from hemispherical source above station compared with GITR response to $\text{Cs}^{137}$ radia- tion beam directed vertically at top of bare detector-----	96
62	B.8	GITR station response to monoenergetic radiation from spherical source around station compared with GITR response to $\text{Cs}^{137}$ radiation beam directed vertically at top of bare detector -----	96
64	B.9	GITR station response to monoenergetic radiation from source presenting solid angle of $1.7-\pi$ steradians below station compared with GITR response to $\text{Cs}^{137}$ radiation beam directed vertically at top of bare detector-----	97
66	B.10	Degraded energy distributions of monoenergetic plane monodirectional gamma radiation after penetrating iron -----	97
67	B.11	Estimated degradation of gamma energy after penetrating 1 inch of steel -----	98
68	C.1	Location and designation of film-badge stations in 5-inch powder magazine (third platform) aboard target ships-----	108
69	C.2	Location and designation of film-badge stations in forward quarters (first platform) aboard target ships-----	108
70	C.3	Location and designation of film-badge stations in crew's mess (second platform) aboard target ships -----	109
71	C.4	Location and designation of film-badge stations in pilot house and chart house (02 level) aboard target ships -----	110
72	C.5	Location and designation of film-badge stations in radio central (main deck) aboard target ships -----	111
	C.6	Location and designation of film-badge stations in forward fireroom (upper level) aboard target ships -----	112

C.7	Location and designation of film-badge stations in forward fireroom (lower level) aboard target ships -----	113
C.8	Location and designation of film-badge stations in forward engine room (upper level) aboard target ships -----	114
C.9	Location and designation of film-badge stations in forward engine room (lower level) aboard target ships -----	115
C.10	Location and designation of film-badge stations in galley (main deck) aboard target ships -----	116
C.11	Location and designation of film-badge stations in aft fireroom (upper level) aboard DD 592 -----	117
C.12	Location and designation of film-badge stations in aft fireroom (lower level) aboard DD 592 -----	118
C.13	Location and designation of film-badge stations in aft engine room (upper level) aboard DD 592 -----	119
C.14	Location and designation of film-badge stations in aft engine room (lower level) aboard DD 592 -----	120
C.15	Location and designation of film-badge stations on main deck (midship) aboard target ships -----	121
C.16	Location and designation of film-badge stations in crew's washroom (main deck) aboard target ships -----	122
C.17	Location and designation of film-badge stations in aft quarters (first platform) aboard target ships -----	123
C.18	Location and designation of film-badge stations on main deck (fantail) aboard target ships -----	124
C.19	Location and designation of film-badge stations in steering gear room (first platform) aboard target ships -----	125

~~CONFIDENTIAL~~

Chapter 1

INTRODUCTION

1.1 OBJECTIVES

The principal objectives were: (1) the determination of total gamma-radiation dose and dose-rate histories aboard three moored ships (destroyers) exposed to radiological environments at locations of possible operational interest about the surface zeros of two underwater nuclear detonations, Shots Wahoo and Umbrella; (2) estimation of remote-source gamma-radiation dose and dose-rate histories at exposed weather-deck locations aboard ship; (3) estimation of total gamma-radiation dose and dose-rate histories in the water adjacent to the ships; and (4) measurement of gamma-ionization decay of a fallout sample collected on one ship a few minutes after each shot.

An additional objective was the provision of preproduction evaluation, production liaison, instrument-maintenance consultation, and a field maintenance facility for all projects using GITR's developed by the U. S. Naval Radiological Defense Laboratory (NRDL).

1.2 TERMINOLOGY

In this report, total gamma-radiation dose indicates the combined contributions of all radiation sources that affect the detectors. Doses and dose rates are specified to apply to air absorption only.

1.3 BACKGROUND AND THEORY

It is of interest to the Navy to find out whether the minimum safe standoff distance for anti-submarine nuclear-weapon-delivery ships is determined by radiological effects or by physical damage. (Standoff distance is defined as the distance of surface zero from the ship at the time of detonation.) Each tactical maneuver by the ship, during and after delivery of the weapon, will have associated with it physical shock and radiation effects. For a given weapon detonated under a specific set of environmental conditions, the shock effects will be chiefly dependent upon the ship's position and orientation with respect to surface zero at the time of shock arrival, whereas the radiation effects will be dependent upon integration (with respect to time) of the shipboard dose rates received at each position along the entire track of the ship.

Because it was not feasible to have the test ships actually perform representative tactical maneuvers in the radiological environments, doses for such maneuvers were not measured directly. The alternative was to obtain data for specific locations, which would be useful for the calculation of dose rates aboard ships performing maneuvers in hypothetical weapon deliveries.

Parameters of interest in determinations of shipboard dose rates include: (1) the magnitudes of radiation sources on the surfaces of the ship, in the surrounding and remote air, and in the surrounding and remote water; (2) the ingress of contaminants into the interior of the ship; and (3) the attenuation afforded by the ship's structures or machinery with respect to the several

~~CONFIDENTIAL~~

radiation sources. Some of these parameters have been previously investigated, principally for other than underwater-detonation conditions.

In past calculations of shipboard radiation attenuation, the major emphasis has been given to residual contamination on ships' weather surfaces (Reference 1), with some work done for a ship enveloped in a radioactive volume of air (Reference 2), assuming monoenergetic gamma radiation and uniform contamination in an idealized geometry. (Shielding calculations are in progress at NRDL, which for both residual contaminant and remote-source radiation take the entire radiation-energy spectrum into account and which eliminate much of the need for idealized geometries in the case of remote-source radiation.)

Gamma radiation from sources outside a ship has been investigated during various phases of the fallout environment from land-surface and water-surface megaton-range detonations during Operations Castle (Reference 3) and Redwing (Reference 4) and, to a very-limited extent, during Operation Wigwam (Reference 5) for a deep-underwater detonation, using Liberty ships (YAG's 39 and 40) as the test vehicles.

The experimental results from Operations Castle, Redwing, and Wigwam indicated that attenuation factors inside ships were dependent not only upon the geometries of the ships' structures but also upon: (1) the geometries and relative magnitudes of the various radiation sources, which depend upon detonation conditions and also change with time; and (2) the gamma-energy spectra, which are functions of time and weapon design.

## Chapter 2

### PROCEDURE

#### 2.1 TARGET SHIPS

The positions and orientations of the target destroyers (DD's) were chosen by the Defense Atomic Support Agency (DASA), based upon compromises of requirements from the many projects utilizing the ships (Figures 2.1 and 2.2). The three distances of the ships from surface zero (SZ) were expected to represent regions of moderate shock damage, moderate to light shock damage, and light to no shock damage to the ships of their equipment. The innermost and outermost ships were oriented with their sterns toward surface zero in order to simulate probable escape maneuvers. The middle ship was oriented with its starboard side toward surface zero to meet requirements of other projects.

The ships were located on a line downwind from surface zero in order to maximize the radiological effects for a given distance from surface zero. They were expected to receive varying amounts of radiation contributed by the plume, cloud, and weapon debris trapped in the water near surface zero. In addition, they were expected to be contaminated to varying degrees by the fallout.

The ships were subjected to continual washdown during the dynamic radiological events, because shipboard operations by the various participating projects would have been hampered by the expected high levels of residual contamination. (Washdown is a standard countermeasure aboard naval ships and would normally be used during fallout or other contaminating events.)

Each ship had forced-draft blowers supplying air to one fired boiler in the forward fireroom in order to supply power needed to meet the operational or experimental requirements of various projects. The experimental ingress studies of Project 2.2 aboard DD 592 also required the operation of forced-draft blowers supplying air to one unfired boiler in the aft fireroom and the operation of ventilation systems supplying air to various compartments (Reference 6). The ingress of these air supplies could be expected to create various gamma radiation sources inside the ships and to influence the radiation fields at various stations under investigation by this project.

#### 2.2 INSTRUMENTATION

The gamma-radiation dose rates and doses aboard the three ships were measured with GTR instrumentation and standard Rad-Safe film badges. The shipboard areas selected for investigation represented or simulated major battle stations aboard modern destroyers.

2.2.1 Gamma-Intensity-Time Recorders (GTR's). Portable, self-contained, battery-powered GTR's were developed as part of NRDL's laboratory program. The GTR consisted of a detector unit and a recorder unit (Appendix A). The detector unit could be mounted inside the recorder unit case, or it could be mounted separately and connected to the recorder unit with a waterproof cable.

The detector unit consisted of two concentric ionization chambers with associated recycling electrometers. Discharge of the initially charged ionization chamber by a predetermined quantity of ionizing radiation, triggered the electrometer circuit, which sent a pulse to the recording unit and recharged the ionization chamber to complete the cycle.

The pulses were recorded as on-off information on magnetic tape in the recorder unit. Three

channels of information were recorded on each tape; the equivalent of at least three decades of radiation dose rates could be recorded linearly on each of two channels, and low-frequency timing pulses were recorded on the third channel. The various recorders were started either manually or by the activation of a relay system connected to an Edgerton, Germeshausen and Grier, Inc. (EG&G) radio timing-signal receiver installed on each ship. The recorder shut itself off automatically when the end of the tape was reached.

The nominal dose-rate ranges of various GTR's are presented in Table 2.1.

**2.2.2 GTR Installations.** Figure 2.3 presents the location and designation of GTR detector stations used by Projects 2.1, 2.2, and 2.3 aboard the ships. Unshielded GTR detector units were mounted on weather decks and in several compartments in order to obtain the total radiation fields at these locations. Each ship also had three specialized GTR stations: (1) Station 14 was directionally shielded against radiation sources aboard the ship, to permit estimation of remote-source radiations; (2) Station 15 was suspended in the water to measure radiation in the nearby water; and (3) Station 16 was modified to a higher dose-rate range to prevent loss of data in case the standard GTR's became saturated. GTR Stations 1 through 16, on all three ships, were of specific concern to this project, although data from other stations was utilized as required.

With the exception of Stations 18 and 21 aboard DD 474 and DD 593 during Shot Umbrella and Stations 15 aboard all three ships during both shots, the detector units were separated from the recorder units. All detector units and all recorder units were spring-mounted to prevent damage from shock. In compartments where temperatures exceeded 120 degrees F (Stations 9, 10, 11, 12, and 13), the detector units were water cooled to prevent damage by heat. Approximately 0.1-inch-thick aluminum was used to: (1) cover each exposed weather-area station as a whole, to provide protection, and (2) jacket the detector itself in the interior stations, to obtain similar energy response characteristics. The centerpoint of each detector's sensitive volume was located 3 feet above the deck on which the station was mounted, except in the specialized GTR Stations 14, 15, and 16.

The modified detector in Station 16 was located 9 feet above the 02 deck to ensure a clear view of all radiation sources, independent of ship orientation. The detector in Station 14 (3.3 feet above the main deck) was encased by 4-inch-thick lead, which shielded against radiation from sources on the ship or in the nearby water but permitted a clear view of surface zero and the sky overhead.

Figures 2.4 and 2.5 show general details of GTR mounting and cooling.

The underwater Station 15 was suspended from a boom extending over the ship's fantail. After the underwater shock waves had passed the ship, the instrument container was meant to be submerged to a depth of 11 feet by means of a winch-release-and-braking mechanism, activated by a delayed relay-closure from the GTR starting circuit. The detector unit was mounted inside the recorder unit case; the whole GTR unit, with detector facing upward, was firmly padded with expanded polystyrene and placed into the instrument container (Figure 2.6).

**2.2.3 Gamma-Ionization Decay Unit.** This unit consisted of a fallout-sample collector, an acid-wash unit, a delivery tube, a polyethylene sample container, a GTR, and a 6-inch-thick lead cave (Figure 2.7).

The sample collector was a polyethylene tray set inside a Project 2.3 open-close collector (OCC) mounted on the unwashed platform on top of the gun director of DD 592 (Reference 7). A perforated stainless-steel tube was attached to the inside edge of the tray to permit spraying the tray with the acid wash. A 1/4-inch tygon tube, protected by flexible metal conduit, connected the tray's drain hole with the sample container inside the lead cave, which was mounted on the main deck of the ship.

The GTR detector was installed in the central cavity of the double-walled sample container so that the fallout sample presented at least a 3- $\pi$  geometry to the detector. The detector and the sample container were surrounded by foam rubber to prevent damage by shock, and the

sample container was provided with an overflow tube to prevent damage by hydrostatic pressure.

An EG&G radio timing signal activated the timing circuit to (1) start the GTR at H-5 minutes; (2) open the cover of the OCC at H-0.5 minute; (3) close the cover of the OCC at H+4 minutes; and (4) wash the tray with 750 cc of concentrated hydrochloric acid at H+5 minutes. The combined acid-and-fallout sample drained into the sample container and remained undisturbed for 53 hours, during which time two 12-hour records of gamma dose rate were obtained. The time period chosen for fallout collection was based upon estimates of the time required to collect a sufficiently large sample of fallout in a short time so as to start decay measurements as early as possible.

**2.2.4 GTR Calibration and Maintenance.** Primary calibration of the GTR detectors had been performed with an accurately calibrated  $\text{Co}^{60}$  source at NRDL. At the Eniwetok Proving Ground (EPG), the project used 120 curies of  $\text{Cs}^{137}$  in a lead-shielded source holder mounted in a trailer for calibration of GTR's. The field calibrations with the  $\text{Cs}^{137}$  source were related to the primary  $\text{Co}^{60}$  calibrations by means of Victoreen 70A r-meters (known to be accurate within  $\pm 5$  percent), which were utilized as transfer standards. The detectors were held in a fixed orientation in the broad-beam radiation field by means of a jig. However, the chosen orientation—which was used in order to insure reproducibility—led to biased calibration, because the directional responses of the detectors were not uniform. The responses to various gamma energies between 0.07 and 1.3 Mev were determined by means of filtered X-ray beams,  $\text{Cs}^{137}$  sources, and  $\text{Co}^{60}$  sources. These responses were used to estimate calibration-bias corrections for various assumed radiation-source geometries and gamma spectra. The details are given in Appendix B.

The field maintenance facility consisted of a dehumidified room equipped with tool kits, standard test equipment (oscilloscopes, and the like), and portable beta-radiation sources. The air-conditioned calibration trailer also contained tool kits and standard test equipment in addition to the gamma-calibration range. These facilities were established for use by all projects utilizing the NRDL GTR's.

**2.2.5 Film Badges.** The GTR gamma-dose measurements were augmented by the use of film badges. Approximately 1,700 standard Rad-Safe film-badge packets were supplied and processed by Task Unit 6 (TU-6).

The standard Rad-Safe film pack consisted of two films: (1) DuPont 502, covering the dose range between 0.1 and 20 r; and (2) DuPont 834, covering the dose range between 10 and 1,200 r. The films were partially covered by lead strips 0.028  $\pm$  0.002 inch thick, to discriminate against beta radiation, thereby permitting determination of gamma dosage. The exposed film was given 5-minute development, with 4.5-minute agitation, in Eastman X-ray film developer at 68 degrees F. The developed film under the lead strip was read with an Eberline-Angus densitometer at the EPG and reread with a Macbeth-Ansco densitometer at NRDL, which permitted scanning the film for damage, pinholes, etc.

The film-badge packets were used in pairs in order to obtain statistical estimates of random errors. Four to eighteen pairs of film-badge packets were either taped to stanchions or suspended with twine 3 feet above deck level in each compartment or area being investigated. Figure 2.8 presents the area locations of the film-badge packets aboard the destroyers. Detailed locations of the packets are presented in Appendix C.

### 2.3 OPERATIONS

This project participated in Shots Wahoo and Umbrella. The GTR's were checked, repaired if necessary, and calibrated before and after each shot, so far as was practicable.

Project personnel mounted the GTR's on the three ships by D-2 days of each shot. Instrument checkout continued until D-1 day, at which time the system was readied for test participation. Personnel of Task Element 7.3.1.5 were briefed on film-badge locations and recovery

procedures aboard the ships by D-2 days, helped project personnel install the film badges by D-1 day, and helped project personnel recover and process the film badges after shot participation.

The GTR's were started either manually at H-3 hours or by receipt of radio timing signals at H-5 minutes. The majority of the GTR recording units operated for 12 hours, but three GTR recording units per ship operated for 60 hours. As soon afterward as was feasible, the record tapes were recovered and processed for data reduction.

## 2.4 DATA REQUIREMENTS

As pointed out in Section 1.2, the doses and dose rates presented in this report, in units of r and r/hr, are defined in terms of air ionization and not in terms of biological effects.

2.4.1 Data Obtained by Project 2.1. The data obtained by this project consisted of GTR records from the various stations indicated in Figure 2.3 and of film badges exposed in locations indicated in Figures C.1 through C.19. The measured GTR data consisted of pulses (representing predetermined quantities of air ionization) recorded on magnetic tapes running at constant speed. The observed film-badge data consisted of the optical densities of the developed film areas originally under the lead strips.

2.4.2 Data Reduction. The pulses recorded on the GTR magnetic tapes were initially converted to uncorrected dose or dose-rate data by means of an analog data-reduction apparatus supplied and operated by Project 2.3 (Reference 7); however, the IBM-704 computer at the EPG was eventually utilized for more accurate read-out. In both cases, the conversion to uncorrected dose and dose rates was based upon the biased field-calibration dose increments of 0.243 mr per pulse for the low-range GTR detectors and of 0.243 r per pulse for the high-range GTR detectors.

For the IBM read-out, the pulses from the GTR records (entered via an auxiliary special-purpose magnetic-tape unit and gate chassis connected to the computer) interrupted accumulation of constant-frequency timing signals in a register of the IBM-704. These times between GTR pulses were stored in the computer memory and a simplified computer program was used to convert the stored period information into records of uncorrected dose, uncorrected dose-rate, and time after start of computation. Corrections for GTR recorder speeds, determined by checking the record's timing channel, were applied as part of the IBM computer program. Corrections for GTR calibration shifts and bias, discussed in Appendix B, were applied to the read-out data.

Conversion of time scales from time-after-start-of-computation to time-after-shot was straightforward for data from the radio-started GTR's, because the starting pulse on the record also served to start the IBM computation. That was not the case for the manually started GTR records; therefore, the dose-rate data from these records (plotted on a relative time scale) had to be time-correlated with data from the radio-started GTR's. This was accomplished by lining up times of those prominent curve features (such as maxima, and the like) that should have occurred at the same time for all stations aboard one ship.

Corrected dose and dose-rate data for individual GTR stations were tabulated. The data from the washed weather-deck GTR stations were averaged and tabulated. For the periods during which saturated GTR's created gaps in the data, estimates of average radiation data for the weather-deck areas were approximated by normalizing appropriate data from several unsaturated interior GTR's to fit the actual weather-deck data on both sides of the gap. The averaged weather-deck dose rates were also corrected for decay to serve as a guide in estimating the relative importance of remote-source radiation (Section 3.2). Ratios of dose and dose rate in compartment to average dose and dose rate on washed weather decks were calculated as functions of time. Ratios of the dose rate in the adjacent water to average dose rate

~~CONFIDENTIAL~~

on the washed weather decks were calculated. The dose-rate histories from the gamma-ionization decay unit were corrected for background of external radiation and normalized to read 1 r. hr at H - 1 hour. Slopes of the log-log plot of normalized dose rates versus time were calculated for various periods.


The various estimates of probable error in the results obtained from GTR data were based upon consideration of the following (or combinations thereof): (1) relative accuracies of biased detector calibrations in the field (Section B.1); (2) tolerance intervals for bias-correction factors calculated for a broad range of assumed radiation-source geometries and gamma energies (Section B.2 and Table B.9); (3) estimated effects of timing errors (Appendix D); and (4) the variance of data about the calculated averages, where appropriate.

The film badges were developed by TU-6, but the gross densities were read and converted to gamma-dose values by project personnel. The gamma doses for all film-badge stations in each compartment or area were averaged. Similarly, the doses for stations in each athwartship (transverse) third of the various compartments were also averaged. Ratios of average dose in compartment to average dose on washed weather-deck areas were calculated. Film-badge calibrations and estimates of error are discussed in Appendix C.

2.4.3 Data from Other Projects. For both Shots Wahoo and Umbrella, this project required: (1) an approximate total of 1,700 standard Rad-Safe film badges which were supplied and developed by TU-6—for technical measurements; (2) records of near-surface wind velocities in the vicinity of the target ships—for correlative purposes; (3) access to photographic and other information that helped to define the dynamic radiological phenomena as a function of time and location in the contaminated region; (4) access to all photographs showing the locations and orientations of the ships with respect to surface zero after shot time—for correlative purposes; and (5) film-pack data for the weather-deck areas from Project 2.3—to augment film-badge data obtained by Project 2.1.


TABLE 2.1 GTR DOSE-RATE RANGES

Detector Type	Record Duration hr	Gamma Dose-Rate Range
Standard	12	9 mr/hr to 87,000 r/hr
Standard	60	9 mr/hr to 17,000 r/hr
Modified	12	10,000 to 2,000,000 r/hr

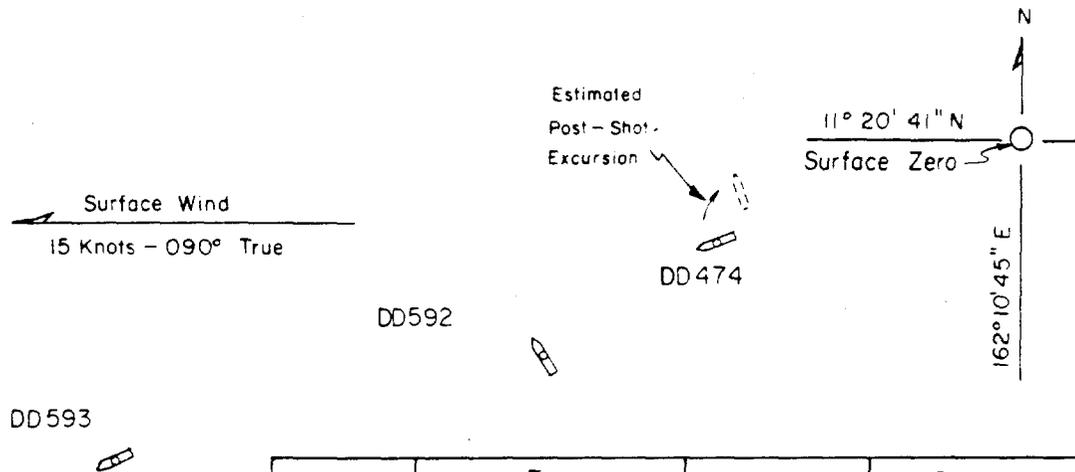


Ship	True Bearing of Ship from SZ	Distance from SZ	Relative Bearing of SZ from Ship
	Degrees	Feet	Degrees
DD 474	251	2900	181.5
DD 592	245	4900	96
DD 593	250	8900	188

Figure 2.1 Target ship array, Shot Wahoo.



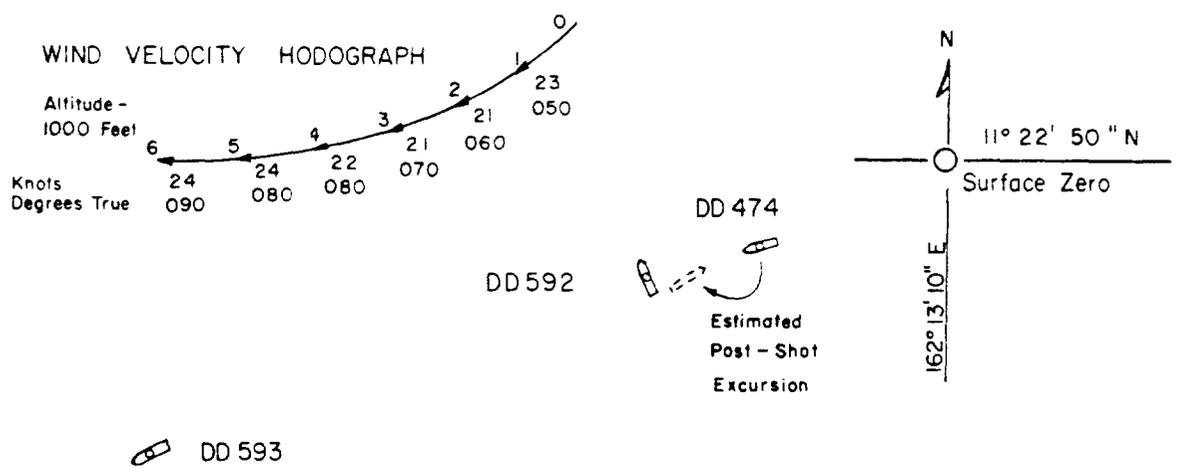


Ship	True Bearing of Ship from SZ	Distance from SZ	Relative Bearing of SZ from Ship
	Degrees	Feet	Degrees
DD 474	245.7	1900	170.6
DD 592	248.5	3000	94.1
DD 593	249.2	7900	186.6


Figure 2.2 Target ship array, Shot Umbrella.

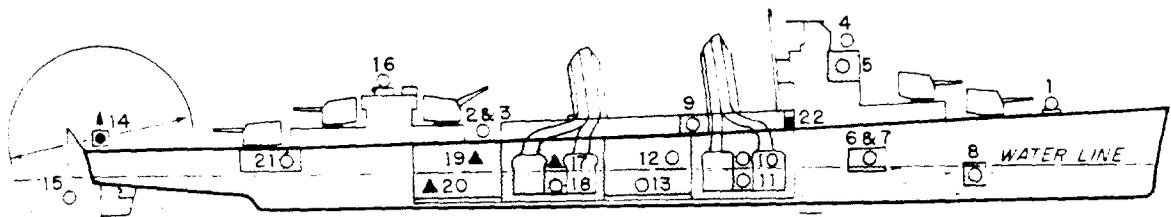


- ◻ SHIELDED STATION, DIRECTION OF VIEW
- UNSHIELDED STATION ON ALL DD'S
- ▲ UNSHIELDED STATION ON DD592 ONLY
- DECAY UNIT ON DD592 ONLY
- ◻ INSTRUMENTED COMPARTMENT



O2 LEVEL

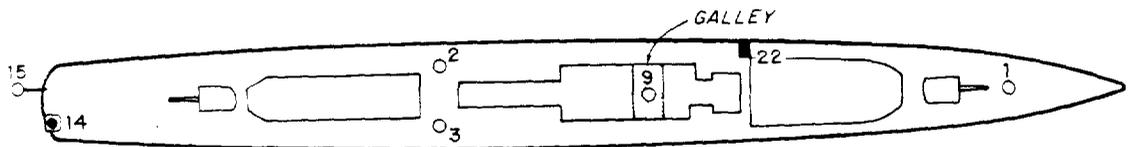


MAIN DECK

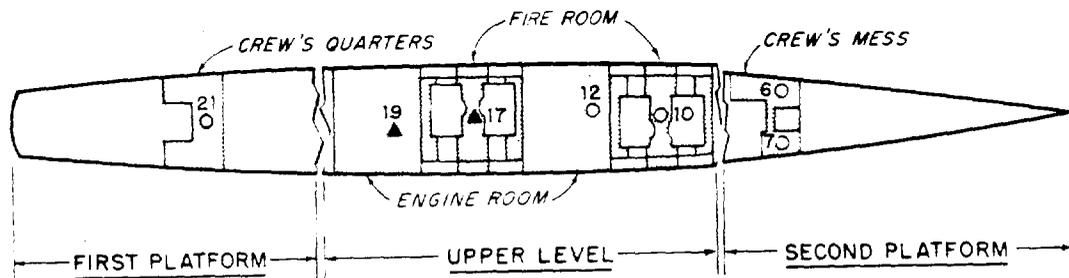

FIRST PLATFORM

UPPER LEVEL

SECOND PLATFORM

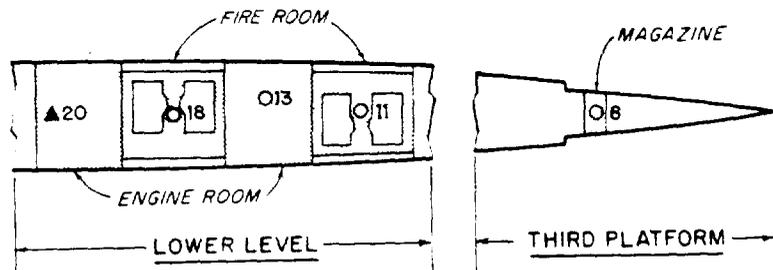

LOWER LEVEL

THIRD PLATFORM

Figure 2.3 Location and designation of GTR stations on target ships.

e  
SZ  
p  
s




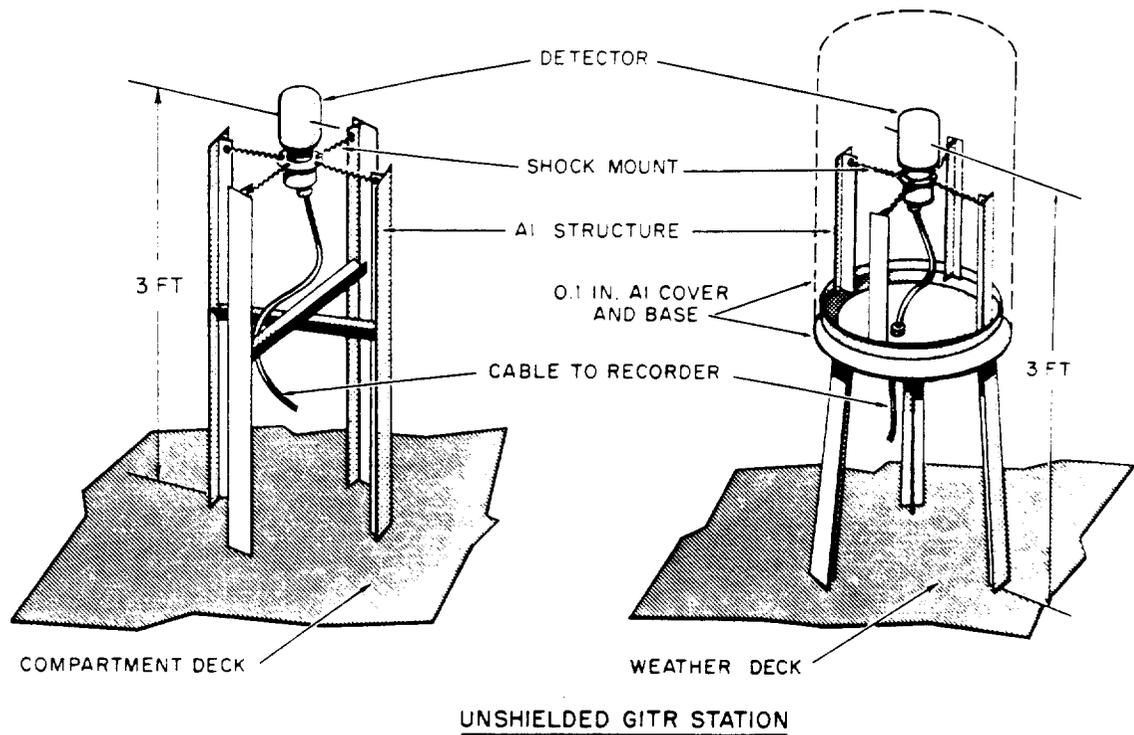


Figure 2.4 GTR detector foundations.

CONFIDENTIAL

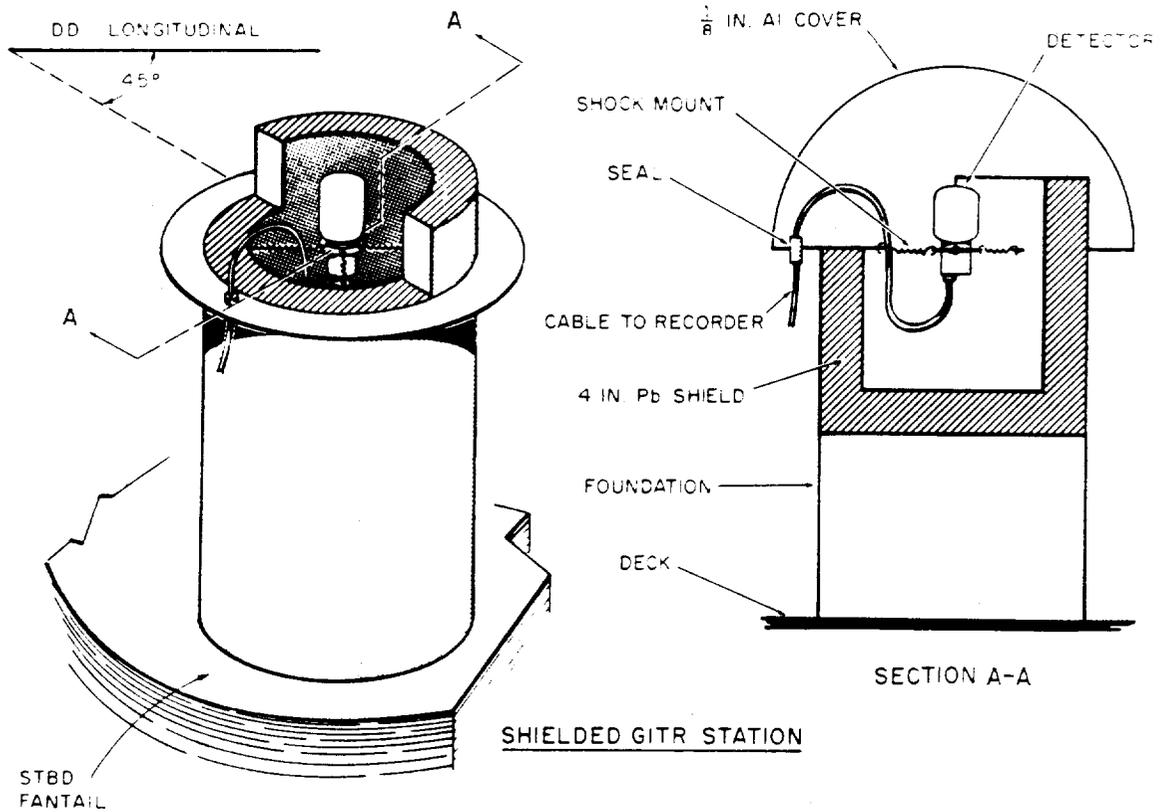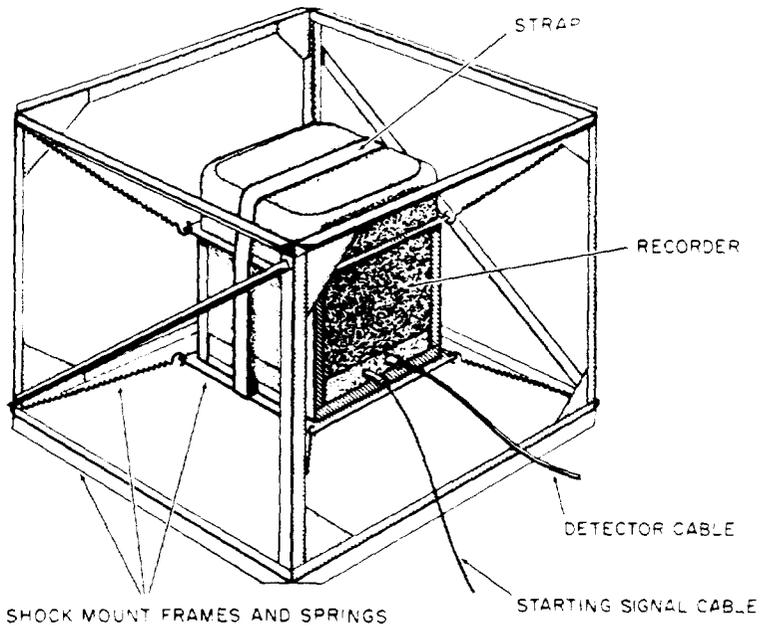

GITR RECORDER FOUNDATION

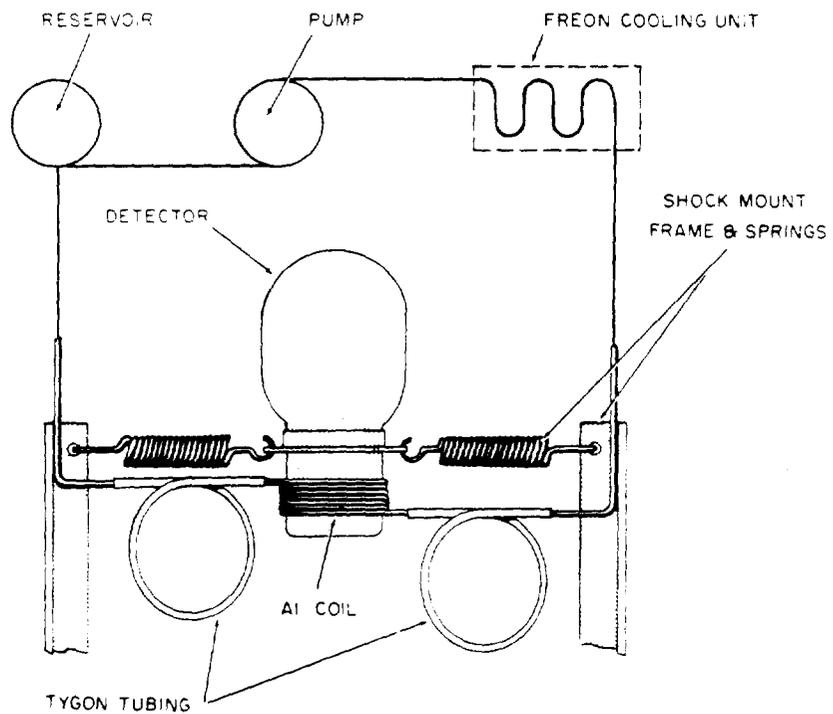

WATER COOLING INSTALLATION FOR GITR

Figure 2.5 GITR recorder and cooling installations.

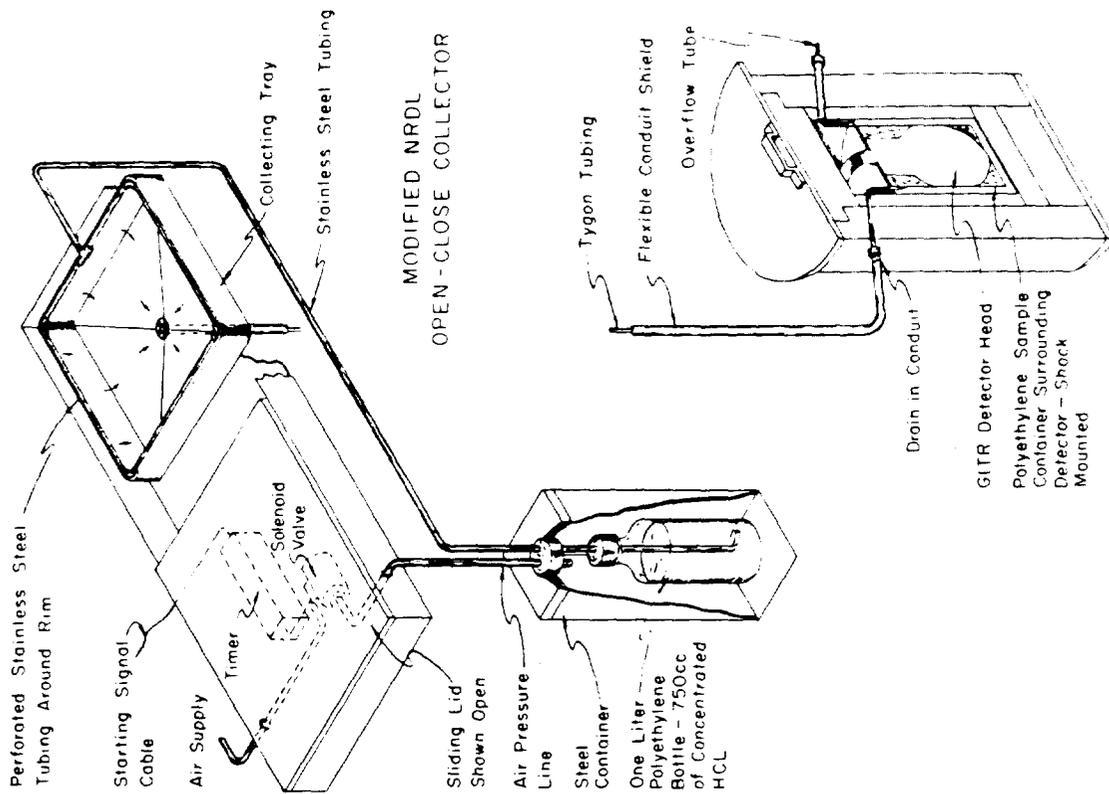


Figure 2.7 Gamma-ionization decay unit.

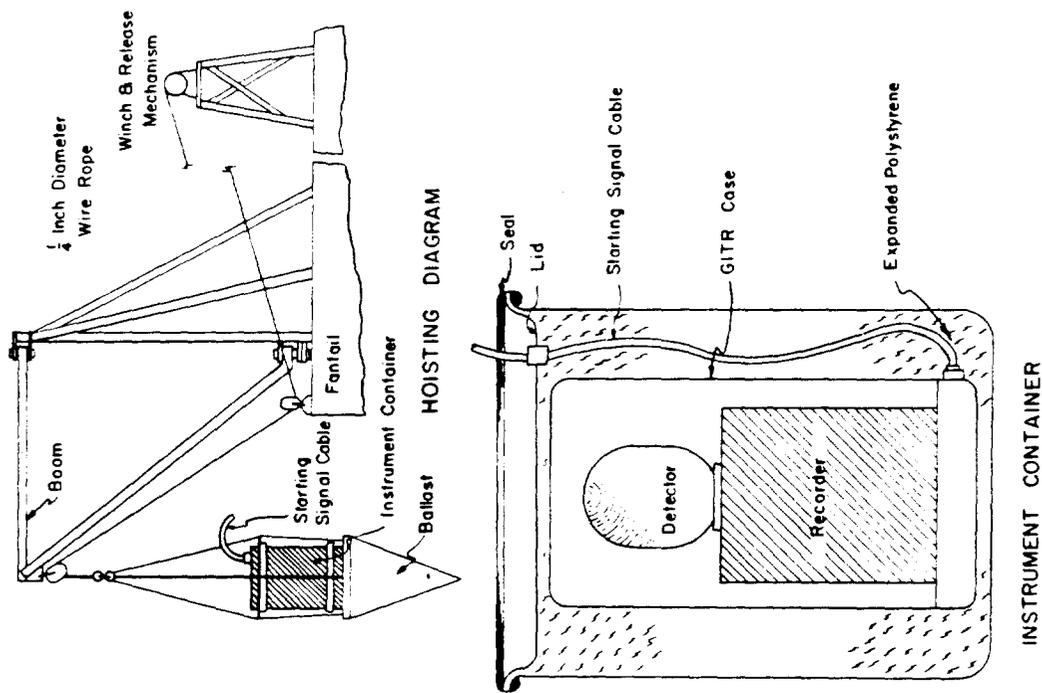


Figure 2.6 Underwater GITR station.

Figure 2.6 Underwater GTR station.

Figure 2.7 Gamma ionization decay unit.

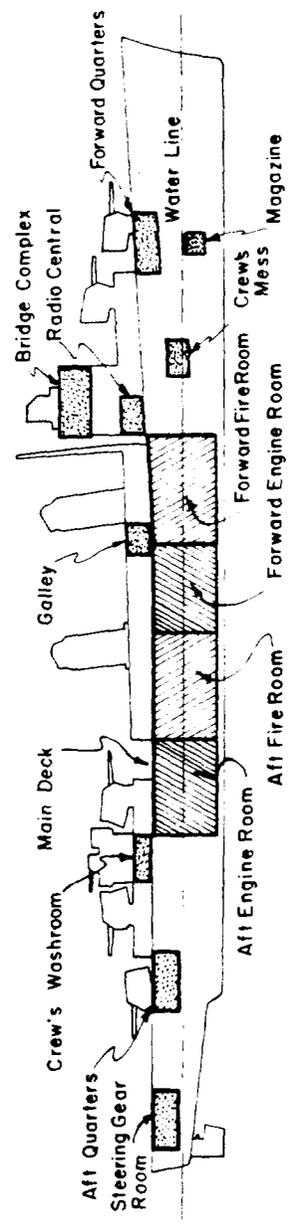


Figure 2.8 Area locations of film badges on target ships.

## RESULTS AND DISCUSSION

After Shot Wahoo, GTR data was obtained only on DD 593, because power failures on the other two ships prevented receipt of the radio timing signals. After Shot Umbrella, GTR data was obtained on all three ships, although some data was lost because of shock damage to several instruments; in addition, the majority of the GTR's were manually started at H-3 hours to circumvent possible repetitions of power failure. The manual starts created some uncertainty in the timing of most records, and as a consequence caused laborious time correlation of dose-rate curves with those few records obtained from radio-started stations.

### 3.1 TOTAL DOSES AND DOSE RATES ABOARD TARGET SHIPS

Detailed tabulations of film-badge and GTR data are presented in Appendixes C and D.

3.1.1 Weather-Deck GTR Data. After Shot Umbrella, the peak weather-deck dose rates on DD 592 and DD 474 exceeded the normal capacity of the GTR detectors, i. e., the detectors were temporarily saturated. To fill the resulting gaps in the averaged weather-deck data for these saturation periods, data from several unsaturated interior GTR stations were normalized to fit the averaged weather-deck dose-rate curves on both sides of the gap. The interior GTR stations (which supplied the data used for normalization) were selected on the basis of similarity in the shape of the candidate dose-rate curve with that of the averaged weather-deck dose-rate curve in the vicinity of the gap. With this criterion, two sets of normalized data (used consecutively) were required to close the gap in the averaged weather-deck dose-rate curve for DD 474 (Figure 3.1). Estimates of average weather-deck dose were obtained by numerical integration of the filled-in dose-rate curves.

Averaged values of the total dose rates and doses on the washed weather decks of the target ships (and estimates of the standard errors) are presented in Figures 3.2 through 3.5 as functions of time. The averages for DD 593 (both shots) do not include the data from GTR Station 1; the data appeared to be anomalously high when compared to the data from the other weather-deck stations. No reason could be found for this apparent anomaly, although the data and calibrations were rechecked. If the data from Station 1 were included, the average doses and dose rates for the weather-deck areas on DD 593 would be about 1.3 times higher than shown in Figures 3.2 through 3.5.

Figures 3.2 and 3.3 compare the weather-deck radiation histories of the three ships for Shot Umbrella. The dose curves show the rapid buildup of dose aboard the two close-in ships. Approximately 600 r were accumulated aboard DD 474 during the interval between 16 and 26 seconds after shot, and approximately 400 r were accumulated aboard DD 592 during the interval between 24 and 40 seconds after shot. Approximately 50 r were accumulated aboard DD 593 up to 150 seconds after shot. These doses represent about 75 percent of the doses accumulated over the entire period of measurement. The curves indicate maximum dose rates of approximately: 550,000 r/hr for DD 474; 200,000 r/hr for DD 592; and 5,200 r/hr for DD 593.

Because radiation histories for Shot Wahoo were obtained only on DD 593, the averaged data from the weather-deck stations on DD 593 for both shots are presented in Figures 3.4 and 3.5 to permit comparisons of effects at similar distances from surface zero (i. e., 7,900 feet for Shot Umbrella and 8,900 feet for Shot Wahoo). The curves (Figure 3.5) show that the dose for

Shot Wahoo eventually reached a value about four times that for Shot Umbrella even though the dose was accumulated more slowly and the ship was 1,000 feet farther from surface zero. For example, DD 593 received 50 r within 150 seconds after Shot Umbrella compared to 50 r received within 240 seconds after Shot Wahoo, whereas the dose eventually built up to 300 r for Shot Wahoo compared to 67 r for Shot Umbrella. The maximum dose rates were approximately 9,100 r/hr for Shot Wahoo and 5,200 r/hr for Shot Umbrella.

The very-early dose-rate peaks evident only on the DD 474 and DD 592 curves of Figure 3.2 (during the time period between 0.5 and 6 seconds after Shot Umbrella) occur at the same time for both ships. This indicates the existence of some radiation source which did not move horizontally; however, the shapes of the dose-rate curves do not appear to correlate with the size-versus-time relationships of the plume at surface zero (References 8 and 9). The doses from the above-mentioned very-early radiations were too low to be of any significance; the values observed on the weather decks were approximately 0.13 r on DD 474 and 0.03 r on DD 592. The very-early radiation was not detected on DD 593 for either shot, and there is no data available to indicate whether such radiation was received on DD 474 and DD 592 after Shot Wahoo.

The time sequences of the major dose-rate peaks which follow the very-early peak appear to depend upon the distances of the ships from surface zero (Figure 3.2), thereby indicating that radiation sources were moving horizontally during these later time periods. This is borne out by Reference 7, which suggests that there is a correlation between the shapes of the dose-rate curves and the movements of the visible base surge or cloud for both shots as determined from timed aerial photographs. Such a correlation would be consistent with the results of Section 3.2 in which it is estimated that more than 95 percent of the dose observed on the weather decks was due to remote-source radiation.

## BEST AVAILABLE COPY

3.1.2 Compartment GTR Data. The dose-rate and dose data for the various compartments are tabulated in Appendix D.

Table 3.1 presents gamma doses accumulated within 24 hours after the shots. That part of the dose which was accumulated in the period later than 90 minutes after shot was estimated by: (1) using the dose rates at 90 minutes after shot; (2) assuming that these dose rates would decay as indicated in Figure 3.42; and (3) integrating the resulting dose-rate curves with respect to time. As an estimate of how the average dose in a compartment is related to the GTR dose data, Table 3.1 also presents location-bias factors, which were obtained by averaging all available ratios of average film-badge dose in the compartment to film-badge dose at the GTR station. The locations of the various compartments and stations are shown in Figure 2.3.

The gross relationships, i. e., ratios, of the gamma dose or dose rate in various compartments to the averaged dose or dose rate on the washed weather decks are presented as functions of time in Figures 3.6 through 3.36. It is important to note that these ratios may not necessarily be good measures of the penetrability of ship structures by radiation from exterior radiation sources for two reasons: (1) the radiation inside some compartments may have been influenced by radiation sources that were inside the ship (Section 2.1, Table 3.2, and Reference 6); and (2) various weather-deck GTR stations may have been shielded by intervening structures whenever remote radiation sources were not directly overhead. This may explain why Figures 3.10, 3.17, 3.18, 3.26, 3.33, and 3.35 show radiation in some compartments to be higher than that on the weather deck during periods preceding possible contaminant ingress. The principal reason for presenting the ratios was to show the variations in the relationship between the radiation inside the ships and the average radiation observed on the weather decks as functions of time.

The ratios of dose in compartment to averaged dose on deck, presented in Figures 3.6 through 3.36, show some fairly consistent trends. There are relatively large variations in the ratios during the time period preceding the major-peak dose rate. This can be attributed principally to the changing radiation-source geometries which probably altered the radiation fields at both interior and exterior GTR stations to an extent depending upon the shielding afforded by structures between the sources and the detectors. For the time period following the major-peak dose rate, by which time most of the dose has been accumulated, most of the dose ratios remain fairly

constant except for a few cases which show significant increases at later times. These increases in dose ratios at late times occur only for stations which are among those listed in Table 3.2 as being probably affected by ingress of contaminants into the ships.

As compared to the ratios of dose shown in Figures 3.6 through 3.18, the ratios of dose rate shown in Figures 3.19 through 3.36 show considerably more variation. This is to be expected because, once most of the dose has already been received, relatively large instantaneous changes in the dose rate may have little effect on the accumulated dose.

For many of the compartments listed in Table 3.2, the dose-rate ratios show significant peaks during the time period following the last major-peak dose rate for both shots and during the time period between the two major-peak dose rates for Shot Umbrella. Most of the above-mentioned effect is attributed to the presence of contaminants inside the ship. Other variations in the dose-rate ratios for all compartments were probably due to changing remote-radiation-source geometries and possibly due to effects from contaminated water surrounding the ships during periods when radiation from other sources was low (see Figure 3.31 for dose-rate ratios based upon the data from the underwater Station 15).

**3.1.3 Film-Badge Data.** Averages of the 24-hour gamma doses aboard the target ships are shown in Table 3.3. Film-pack data from Project 2.3 (Reference 7) are included in the table. The locations of the various compartments are shown in Figure 2.8. The locations and data from individual film-badge stations are presented in Appendix C. In general, the Project 2.3 film-pack doses are significantly lower than the Project 2.1 film-badge doses for the weather-deck areas. This may be due to differences in film, in processing control, and possibly in calibration and read-out technique. Some of the Project 2.1 film-badge data from Shot Umbrella for the DD 474 appears to be anomalously low when compared to the data for DD 592; the GTR data indicates that the doses on DD 474 should be significantly higher than the doses on DD 592. The data was rechecked and the badges were reexamined, but no reasons for the anomalies could be determined.

For Shot Wahoo, most of the film-badge stations were exposed to doses in excess of 500 r aboard DD 474, 200 r aboard DD 592, and 90 r aboard DD 593. For Shot Umbrella, the doses were lower although the ships were from 1,000 to 2,000 feet closer to surface zero; but DD 474 and DD 592 were still exposed to doses in excess of 200 r in many compartments, whereas aboard DD 593 the doses in all compartments were less than 45 r.

Ratios of averaged gamma dose in various compartments to the averaged dose on the weather decks of DD 592 and DD 593 are presented in Table 3.4. Ratios for DD 474 are not presented, because the average dose on the weather decks could not be determined for Shot Wahoo, and because the film-badge data for Shot Umbrella was considered to be unreliable. For each compartment, the several dose ratios are in very good agreement so that reliable averages could be determined. The film-badge dose ratios range between 0.36 and 0.56 for compartments on or above the main deck, 0.14 and 0.46 for nonmachinery compartments below the main deck, 0.11 and 0.20 for machinery spaces above the waterline, and 0.019 and 0.068 for machinery spaces below the waterline. Note that the possible limitations of the GTR dose ratios that were discussed in Section 3.1.2 should also apply to the film-badge dose ratios.

As a rough indication of dose distribution, the doses observed in each athwartship, i. e., transverse, third of various compartments were averaged and presented in Tables 3.5 through 3.7. In wide compartments there was a tendency to have lower doses in the center, presumably because of shielding afforded by the superstructure. Another indication of nonuniform dose distribution in some compartments is the location-bias factor presented in Table 3.1 and discussed in Section 3.1.2.

The available comparisons of GTR and film-badge doses at the GTR stations are presented in Table 3.8. The ratios of GTR dose to film-badge dose range between 0.72 and 1.46 and have an average value of 0.96 with a standard deviation of 0.14. Comparisons of GTR and film-badge ratios of dose at GTR stations to average dose on the weather decks are presented in Table 3.9. The ratios of GTR dose ratio to film-badge dose ratio range between 0.76 and 1.21 and have an

average value of 1.02 with a standard deviation of 0.11. These comparisons show that, with few exceptions, there is good agreement and apparently no bias between results obtained from GTR and film-badge dose data.

### 3.2 REMOTE-SOURCE GAMMA RADIATION

The directionally shielded GTR Station 14 was designed to permit discrimination between remote-source radiation and high backgrounds of radiation from deposited contaminants. However, examination of the data indicated that the background of radiation from contaminants on the washed weather decks was so low that the differences between remote-source and total radiation were smaller than the probable errors in the radiation measurements. This led to the following approach for estimation of the remote-source-radiation contribution to the total radiation observed on the washed weather decks.

The basis for the estimation technique was examination of the decay-corrected plots of the average total dose rates on the weather decks, which are presented in Figures 3.37 through 3.40. Measured decay data were available for the period later than 6 minutes after Shot Umbrella (Section 3.4). For Shot Wahoo and for the period earlier than 6 minutes after Shot Umbrella, estimated probable limits for the unknown decay curve were based upon: (1) the calculations of gamma dose-rate decay for unfractionated fission products (Reference 10); and (2) straight-line extrapolation on the log-log plot of the measured gamma dose-rate decay shown in Figure 3.42. The following discussion requires the assumptions that some undetermined decay-corrected dose-rate curve can represent the buildup of contaminants on the ships' weather surfaces; and that this unknown curve always had either zero or positive slopes during the period of interest, even though the decks were continuously washed (Reference 3 indicates that the major value of washdown is the continuous suppression of contaminant buildup). Consider the above assumptions and refer to Figures 3.37 through 3.40. The minima between the two major peaks of the Shot Umbrella curves can certainly be considered to be upper limits of the decay-corrected dose rate from fallout deposited on the weather surfaces of the ships at the indicated times, because even if no radiation was contributed by airborne radioactivity (which may not have been the case) the contribution from deposited fallout could not be greater than the total. For similar reasons, those portions of the curves which tend to level off after the last major peak for either shot can also be considered upper limits of decay-corrected dose rates from deposited radioactivity, especially if there was a significant drop in the decay-corrected dose rate after the nearly horizontal portion of the curve. Therefore, if the assumption of a continuously increasing buildup of contaminants is valid, it follows that overestimates of the contribution by deposited contaminants to the decay-corrected dose rates can be represented by the horizontal lines labeled as such in Figures 3.37 through 3.40. These decay-corrected estimates were converted to dose rates that were integrated to obtain upper limits of the estimated dose contributed by deposited contaminants for each assumed decay curve.

The estimated doses contributed by remote-source radiation to the total doses observed on the washed weather decks of the three target ships, based upon the above-mentioned approach, are presented in Table 3.10. These values indicate that at least 95 and 98 percent of the total dose observed on the washed decks was due to remote-source radiation resulting from Shots Umbrella and Wahoo, respectively. As a consequence, the observed total-radiation data can adequately represent the remote-source radiation for the washed weather-deck areas during the first 10 minutes after shot. Unfortunately, there was no data available from which it would have been feasible to estimate the percent contribution of the remote-source radiation to the total dose for unwashed weather decks.

## BEST AVAILABLE COPY

### 3.3 TOTAL GAMMA RADIATION IN ADJACENT WATER

The attempt to measure the radiation in the water adjacent to the target ships was not successful. No data was obtained for Shot Wahoo, because the starting signals were not received

~~CONFIDENTIAL~~

on the only two target ships that were instrumented (the instrument on DD 593 had been cannibalized at the last minute to replace a burned out solenoid on one of the closer ships). Because the dropping mechanism for GTR Station 15 proved unreliable, the underwater radiation detectors were submerged in the water prior to Shot Umbrella in the hope that some data would be obtained; however, the instruments on DD 474 and DD 592 were damaged by shock. Consequently, the only data obtained was from DD 593 after Shot Umbrella.

The tabulated radiation data obtained from the underwater GTR on DD 593 for Shot Umbrella is presented in Appendix D. During the period when the ship was enveloped by the base surge, the peak dose rates of 0.19 r/hr at 8 minutes after shot and the 0.01 r dose accumulated by 18 minutes after shot are attributed to contaminants depositing in the water and possibly to contaminants washed off the ship. Following this period, the underwater dose rates were very low until they again rose to a peak of 0.19 r/hr at 6.4 hours after shot, and the dose accumulated to 0.37 r by 8.5 hours after shot. This late resurgence of underwater radiation is attributed to a patch of contaminated water (detonation debris originally upwelling at surface zero) drifting down upon DD 593.

Figure 3.41 presents ratios of dose rate in the water to average dose rate on the washed weather decks of DD 593 after Shot Umbrella. Three curves were constructed because of a possible uncertainty of 30 seconds in the timing. The results for all three possibilities show that the underwater dose rates were less than 0.2 percent of the washed-weather-deck dose rates during the periods when the ship was enveloped by the base surge and were no more than 20 percent of the washed-weather-deck dose rates during the later periods when the deck dose rates were very low. Therefore, although the contaminated water did not contribute significantly to the gamma dose observed on DD 593 after Shot Umbrella, the radiation from the water may have influenced the dose-rate ratios to a significant degree at later times.

#### 3.4 GAMMA-IONIZATION DECAY

No data on gamma-ionization decay was obtained for Shot Wahoo, because the starting signal was not received. The gamma dose-rate data from the decay unit (GTR Station 22) aboard DD 592 after Shot Umbrella is presented in Appendix D.

Logarithms of the relative gamma dose rates are plotted as a function of logarithms of the time-after-shot in Figure 3.42. The decay curve was also separated into segments fitted to an equation of the form

$$\text{Dose rate} = \text{constant} \times (\text{time})^n$$

The exponents  $n$  were evaluated for various time intervals and are represented by the slopes of the log-log curve shown in the figure. Standard regression techniques were applied to the logarithmic variables to obtain the slopes and their 95-percent confidence limits.

The background of external radiation affecting the dose rates inside the 6-inch-thick lead cave was estimated to be negligible for the time periods under consideration. The estimate was based upon use of: (1) gamma energy variations listed in Reference 10; (2) gamma-radiation absorption coefficients and buildup factors from Reference 11; and (3) monodirectional attenuation equations applied to the average deck-dose rates.

TABLE 3.1 TWENTY-FOUR-HOUR GAMMA DOSES AT GITR STATIONS,  
BASED UPON GITR DATA

Compartment	GITR Station	Shot Wahoo		Shot Umbrella		Location-Bias Factor *
		DD 592	DD 592	DD 474	DD 592	
Weather decks †	1 through 4	311	806	527	67.1	—
Pilot house	5	144	—	199	30.0	0.99
Crew's mess	6	60	127	65	12.4	1.15
	7	70	—	108	15.8	0.82
Magazine	8	59	—	75	13.4	0.98
Galley	9	227	—	—	42.5	0.95
Forward fireroom	10	50	95	53	10.9	1.54
	11	29	37	26	3.5	0.82
Forward engine room	12	31	56	47	6.8	1.35
	13	—	24	12	—	0.80
Aft fireroom	17	—	—	66	—	1.35
	18	—	24	29	3.0	0.77
Aft engine room	19	—	—	81	—	1.13
	20	—	—	26	—	1.23
Aft quarters	21	—	—	158	21.3	1.12

\* The location-bias factor is the mean ratio of average film-badge dose in compartment to film-badge dose at GITR station.

† Doses for washed weather decks are averaged values.

## BEST AVAILABLE COPY

TABLE 3.2 COMPARTMENTS PROBABLY INFLUENCED BY INGRESS OF  
RADIOACTIVE CONTAMINANTS

Compartment	GITR Station	Ship	Shot	Probable Source of Ingress
Galley	9	DD 592	Umbrella	Ventilation air
Forward fireroom	10 and 11	All	Umbrella and Wahoo	Boiler air (fired boiler)
Forward engine room	13	DD 474 DD 592	Umbrella	Condenser water (?)
Aft fireroom	17 and 18	DD 592	Umbrella	Boiler air (unfired boiler)
Aft engine room	19 and 20	DD 592	Umbrella	Ventilation air
Aft quarters	21	DD 592	Umbrella	Ventilation air

**CONFIDENTIAL**

TABLE 3.3 AVERAGE 24-HOUR GAMMA DOSES ABOARD TARGET SHIPS,  
BASED UPON FILM-BADGE DATA

Compartment or Area	Shot Wahoc			Shot Umbrella		
	DD 474	DD 592	DD 593	DD 474	DD 592	DD 593
Dose in roentgens.						
Above waterline, 16 to 33 ft:						
All weather decks *	947	525	222	563	351	44.8
Main weather deck	>1,000	>853 †	421	394 ‡	549	65.6
Bridge complex	>760	514	172	340	229	30.3
Above waterline, 11 to 16 ft:						
Forward quarters	>820	518	163	326	204	27.0
Radio central	>714	527	152	257	190	23.8
Galley	>884	552	210	317 ‡	282	36.7
Crew's washroom	>900	603	179	254 ‡	307	32.6
Above waterline, 2 to 4 ft:						
Crew's mess	507	219	71.7	166	92.4	11.8
Forward fireroom	355	153	68.7	134	89.6	10.6
Forward engine room	223	121	45.1	79.4	64.4	8.3
Aft fireroom	—	177	—	—	98.4	—
Aft engine room	—	164	—	—	108	—
Aft quarters	>802	410	144	229 ‡	219	28.7
Steering gear room	590	310	96.3	180 ‡	215	23.4
Below waterline, 3 to 6 ft:						
Magazine	333	214	63.4	165	79.1	10.7
Forward fireroom	101	38.0	18.9	44.3	18.7	<1.7
Forward engine room	76	31.1	9.5	16.4	10.7	<1.3
Aft fireroom	—	51.1	—	—	21.6	—
Aft engine room	—	62.4	—	—	37.6	—

\* Project 2.3 film-pack data (Reference 7).

† If some values greater than recommended range of film dose are assumed to be valid, the average dose would be approximately 1,130 r.

‡ Anomalous values.

TABLE 3.4 RATIOS OF GAMMA DOSE IN COMPARTMENTS TO DOSE ON WEATHER DECKS, BASED UPON AVERAGE FILM-BADGE DATA

Dose in roentgens.

Compartment or Area	Shot Wahoo		Shot Umbrella		Mean Value	Standard Deviation
	DD 59L	DD 59B	DD 592	DD 593		
Above waterline, 33 ft:						
Bridge complex	0.46	0.41	0.42	0.46	0.438	0.026
Above waterline, 11 to 16 ft:						
Forward quarters	0.46	0.39	0.37	0.41	0.408	0.039
Radio central	0.47	0.36	0.36	0.36	0.388	0.055
Galley	0.49	0.56	0.51	0.56	0.515	0.031
Crew's washroom	0.54	0.43	0.56	0.50	0.508	0.057
Above waterline, 2 to 4 ft:						
Crew's mess	0.19	0.17	0.17	0.18	0.178	0.016
Forward fireroom	0.14	0.16	0.16	0.16	0.155	0.016
Forward engine room	0.11	0.11	0.12	0.13	0.118	0.016
Aft fireroom	0.16	—	0.18	—	0.170	0.014
Aft engine room	0.15	—	0.20	—	0.175	0.035
Aft quarters	0.36	0.34	0.40	0.44	0.385	0.044
Steering gear room	0.28	0.23	0.39	0.36	0.315	0.073
Below waterline, 3 to 6 ft:						
Magazine	0.19	0.15	0.14	0.16	0.160	0.022
Forward fireroom	0.034	0.045	0.034	0.026	0.035	0.008
Forward engine room	0.028	0.023	0.019	0.033	0.026	0.006
Aft fireroom	0.045	—	0.039	—	0.042	0.004
Aft engine room	0.055	—	0.068	—	0.062	0.016

TABLE 3.5 ATHWARTSHIP VARIATION OF 24-HOUR GAMMA DOSES ABOARD DD 474, BASED UPON AVERAGE FILM-BADGE DATA

Dose in roentgens.

Compartment or Area	Shot Wahoo			Shot Umbrella		
	Port	Center	Stbd	Port	Center	Stbd
Above waterline, 16 to 33 ft:						
Weather decks *	870	1,040	970	490	650	570
Bridge complex	>800	>750	>1,000	360	310	410
Above waterline, 11 to 16 ft:						
Forward quarters	>1,000	780	>1,000	320	250	410
Radio central	>1,000	580	>1,000	230	220	360
Galley	>900	>1,000	>1,000	290	340	290
Crew's washroom	>1,000	>1,000	810	260	250	280
Above waterline, 2 to 4 ft:						
Crew's mess	570	330	750	150	140	220
Forward fireroom	250	130	420	140	96	200
Forward engine room	410	270	510	84	56	140
Aft quarters	820	760	>900	230	200	250
Steering gear room	630	—	530	190	—	170
Below waterline, 3 to 6 ft:						
Magazine	280	410	310	170	160	160
Forward fireroom	77	100	120	33	47	53
Forward engine room	100	53	—	18	14	—

\* Project 2.3 film-pack data (Reference 7).

CONFIDENTIAL

TABLE 3.6 ATHWARTSHIP VARIATION OF 24-HOUR GAMMA DOSES  
ABOARD DD 592, BASED UPON AVERAGE FILM-BADGE DATA

Dose in roentgens.

Compartment or Area	Shot Wahoo			Shot Umbrella		
	Port	Center	Stbd	Port	Center	Stbd
Above waterline, 16 to 33 ft:						
Weather decks *	480	590	530	310	380	370
Bridge complex	590	400	570	230	220	260
Above waterline, 11 to 16 ft:						
Forward quarters	680	340	570	210	160	250
Radio central	850	310	740	180	140	530
Galley	560	500	620	270	280	290
Crew's washroom	440	630	650	320	300	510
Above waterline, 2 to 4 ft:						
Crew's mess	220	190	260	66	75	140
Forward fireroom	190	110	190	79	61	160
Forward engine room	130	92	170	49	47	120
Aft fireroom	190	140	230	94	69	160
Aft engine room	200	120	210	120	80	150
Aft quarters	440	360	420	210	190	290
Steering gear room	320	—	320	210	—	220
Below waterline, 3 to 6 ft:						
Magazine	240	190	220	74	74	89
Forward fireroom	35	51	30	14	27	15
Forward engine room	35	24	—	12	9	—
Aft fireroom	40	59	42	14	26	18
Aft engine room	—	45	88	—	28	52

\* Project 2.3 film-pack data (Reference 7).

TABLE 3.7 ATHWARTSHIP VARIATION OF 24-HOUR GAMMA DOSES  
ABOARD DD 593, BASED UPON AVERAGE FILM-BADGE DATA

Dose in roentgens.

Compartment or Area	Shot Wahoo			Shot Umbrella		
	Port	Center	Stbd	Port	Center	Stbd
Above waterline, 16 to 33 ft:						
Weather decks *	220	250	210	40	50	40
Bridge complex	170	190	190	28	29	37
Above waterline, 11 to 16 ft:						
Forward quarters	190	120	190	27	20	35
Radio central	190	140	170	21	21	35
Galley	200	240	190	33	38	40
Crew's washroom	230	150	250	34	33	37
Above waterline, 2 to 4 ft:						
Crew's mess	76	56	90	11	8.7	16
Forward fireroom	69	55	90	9.9	8.1	17
Forward engine room	55	33	59	8.2	6.0	14
Aft quarters	140	120	170	30	25	32
Steering gear room	99	—	94	20	—	21
Below waterline, 3 to 6 ft:						
Magazine	61	68	61	10	12	10
Forward fireroom	12	27	19	<2.2	2.4	1.6
Forward engine room	12	7	—	<1.5	<1.0	—

\* Project 2.3 film-pack data (Reference 7).

TABLE 3.8 COMPARISONS OF 24-HOUR GITR AND FILM-BADGE DOSES AT GITR STATIONS

Dose in roentgens.

GITR Station	GITR Dose	Film Dose	GITR/Film Ratio *	GITR Dose	Film Dose	GITR/Film Ratio *
DD 593, Shot Wahoo				DD 474, Shot Umbrella		
5	144	199	0.72	—	—	—
6	66	72	0.92	127	138	0.92
7	70	74	0.95	—	—	—
8	59	68	0.87	—	—	—
9	227	215	1.04	—	—	—
10	50	54	0.93	—	—	—
11	29	27	1.07	37	47	0.79
12	31	34	0.91	56	63	0.89
13	—	—	—	24	25	0.96
DD 592, Shot Umbrella				DD 593, Shot Umbrella		
5	199	211	0.94	30.0	30.9	0.97
6	—	—	—	12.4	10.9	1.14
7	108	123	0.88	15.8	15.5	1.02
8	—	—	—	13.4	12.1	1.11
10	53	58	0.91	—	—	—
11	26	27	0.96	3.5	2.4	1.46
12	—	—	—	6.8	6.0	1.13
13	12	12	1.00	—	—	—
17	66	66	1.00	—	—	—
18	29	29	1.00	—	—	—
19	81	96	0.84	—	—	—
20	26	33	0.79	—	—	—
21	158	164	0.80	—	—	—

\* The mean value is 0.96; the standard deviation is 0.14.

TABLE 3.9 COMPARISONS OF GITR AND FILM-BADGE RATIOS OF DOSE AT GITR STATIONS TO AVERAGE DOSE ON WEATHER DECKS

GITR Station	Mean GITR Ratio *	Standard Deviation of Ratio	Mean Film-Badge Ratio *	Standard Deviation of Ratio	Ratio GITR/Film Ratios †
5	0.429	0.046	0.440	0.042	0.98
6	0.168	0.039	0.161	0.026	1.04
7	0.221	0.015	0.217	0.029	1.02
8	0.177	0.030	0.162	0.021	1.09
9	0.634	0.085	0.524	0.076	1.21
10	0.125	0.025	0.105	0.018	1.19
11	0.052	0.012	0.048	0.011	1.07
12	0.084	0.013	0.086	0.004	0.98
13	0.025	0.004	0.025	0.007	1.00
17	0.124	—	0.122	0.003	1.02
18	0.042	0.012	0.055	0.004	0.76
19	0.154	—	0.152	0.032	1.02
20	0.050	—	0.051	0.012	0.98
21	0.310	0.012	0.341	0.008	0.91

\* All dose ratios applicable to a given station for the several ships for both shots were averages, if available.

† The mean value is 1.02; the standard deviation is 0.11.

~~CONFIDENTIAL~~

TABLE 3.10 ESTIMATED DOSE CONTRIBUTED BY REMOTE-SOURCE RADIATION OBSERVED ON WASHED WEATHER DECKS OF THE TARGET SHIPS

Ship	Shot	Remote-Source Contribution to Total Dose on Deck	
		At 15 min After Shot	At 2 hrs After Shot
		pct	pct
DD 474	Umbrella	97.2 *	96.6 *
		94.8 †	94.3 †
DD 592	Umbrella	97.5 *	97.0 *
		96.0 †	95.5 †
DD 593	Umbrella	96.5 *	96.1 *
		96.3 †	94.9 †
DD 593	Wahoo	99.4 *	98.1 *
		98.9 †	97.6 †

\* Estimate based upon use of decay curve (Reference 10).

† Estimate based upon use of extrapolated measured-decay curve.

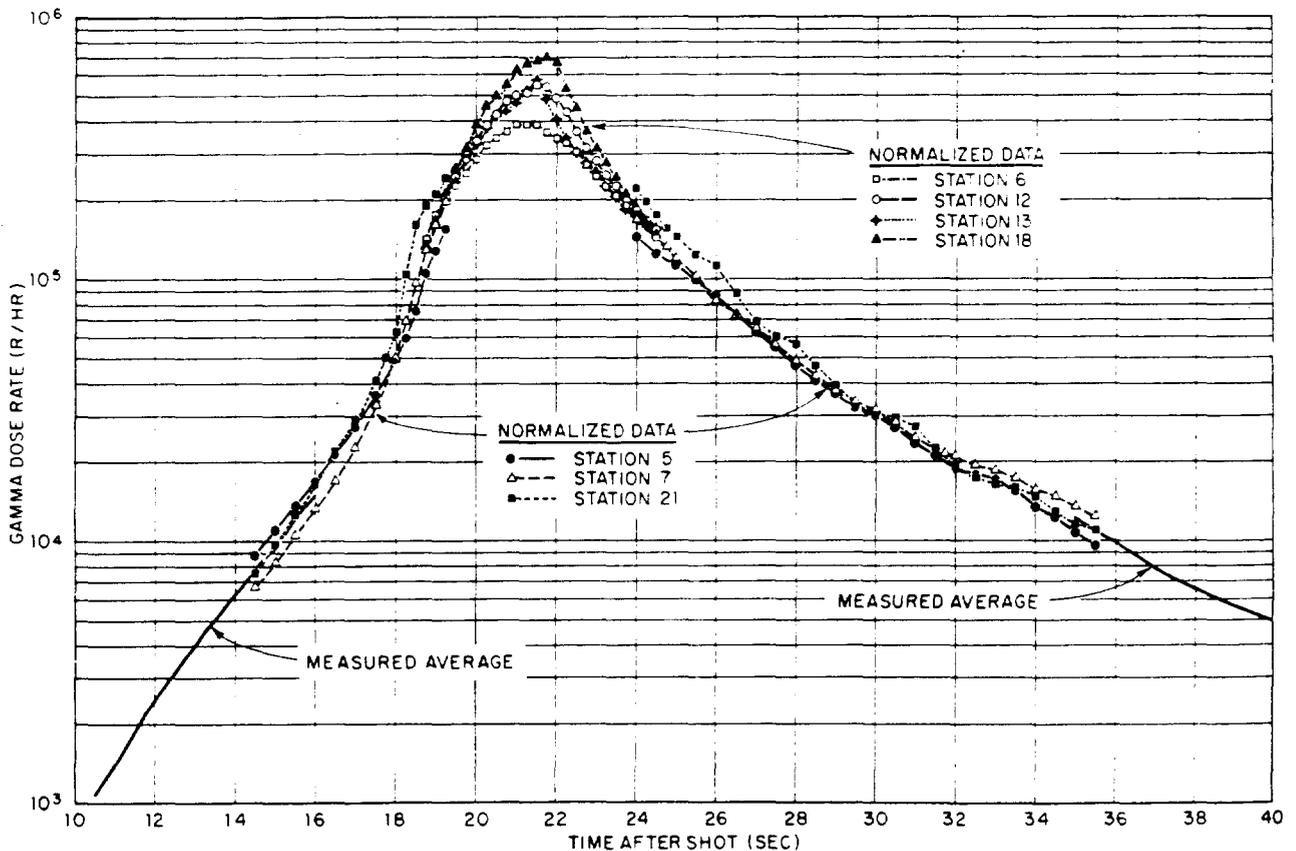


Figure 3.1 Example of estimating average dose rates on deck of DD 474 for period of GTR saturation, Shot Umbrella.

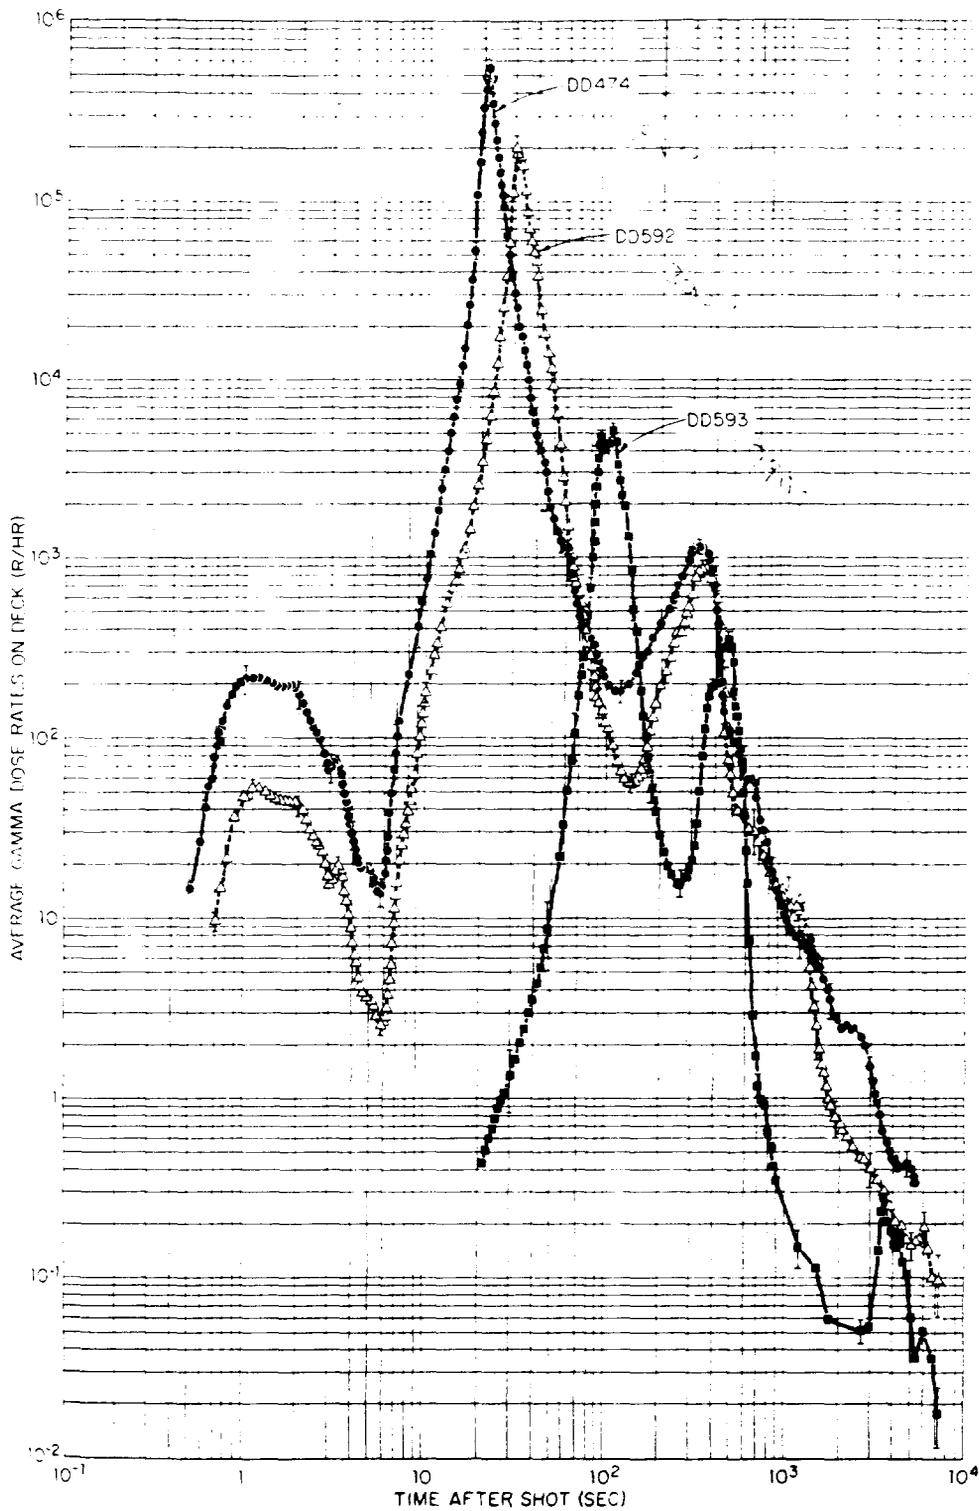


Figure 3.2 Average gamma dose rates on weather decks of target ships, Shot Umbrella. Vertical bars indicate estimates of probable error.

**CONFIDENTIAL**

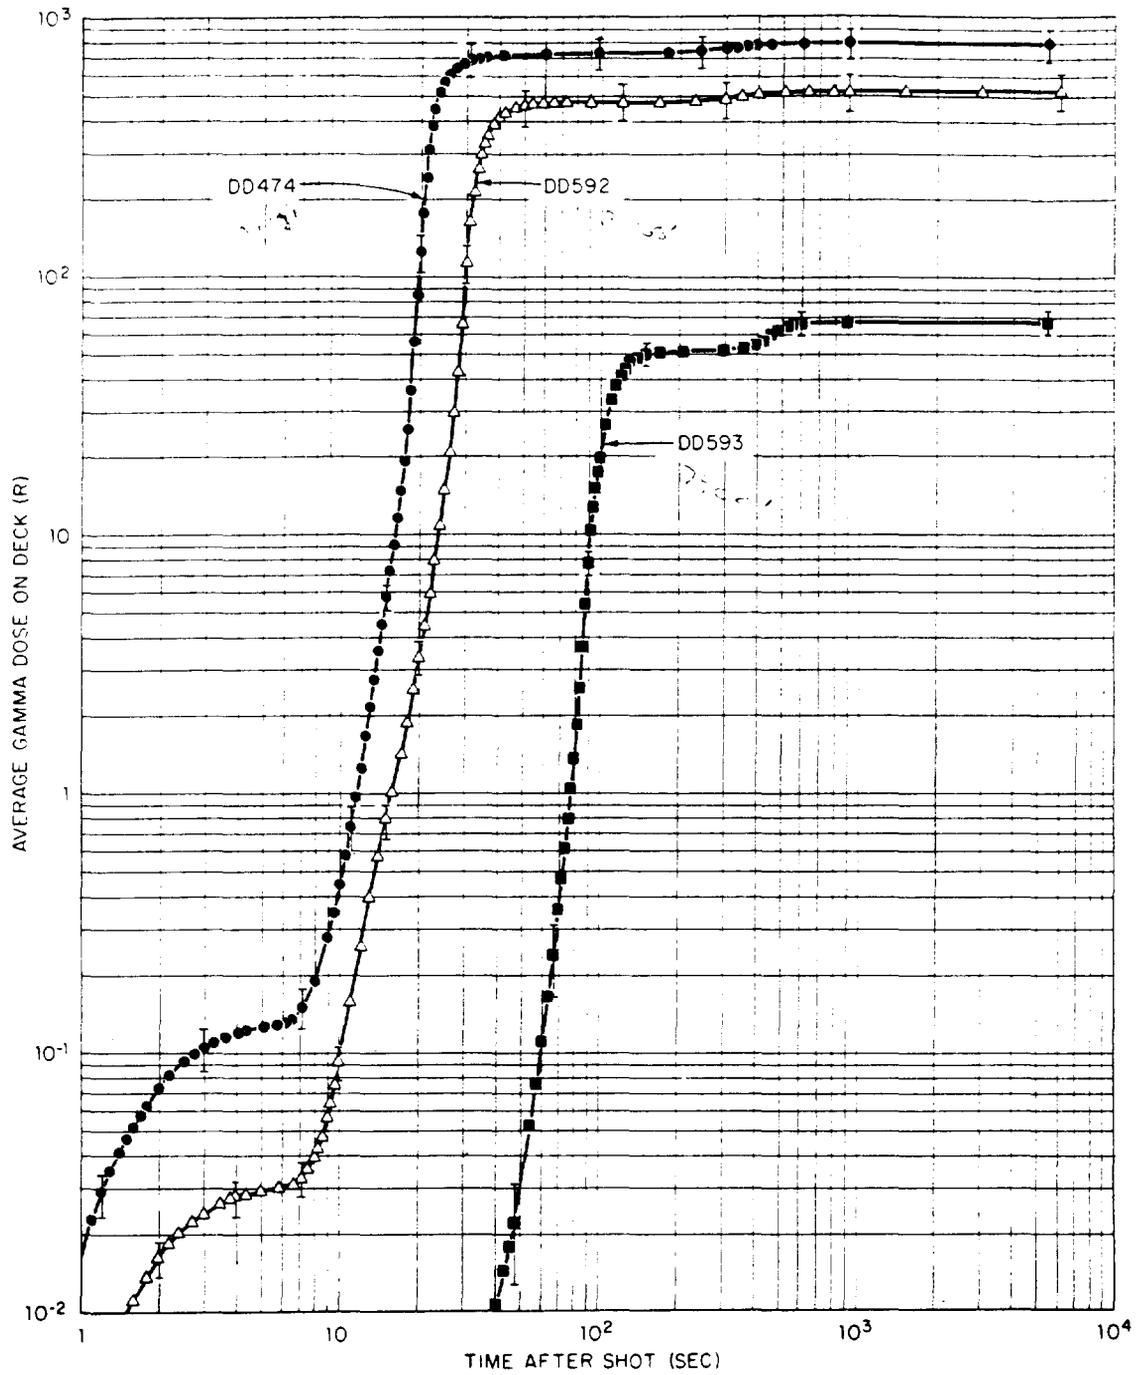


Figure 3.3 Average gamma doses on weather decks of target ships, Shot Umbrella. Vertical bars indicate estimates of probable error.

~~CONFIDENTIAL~~

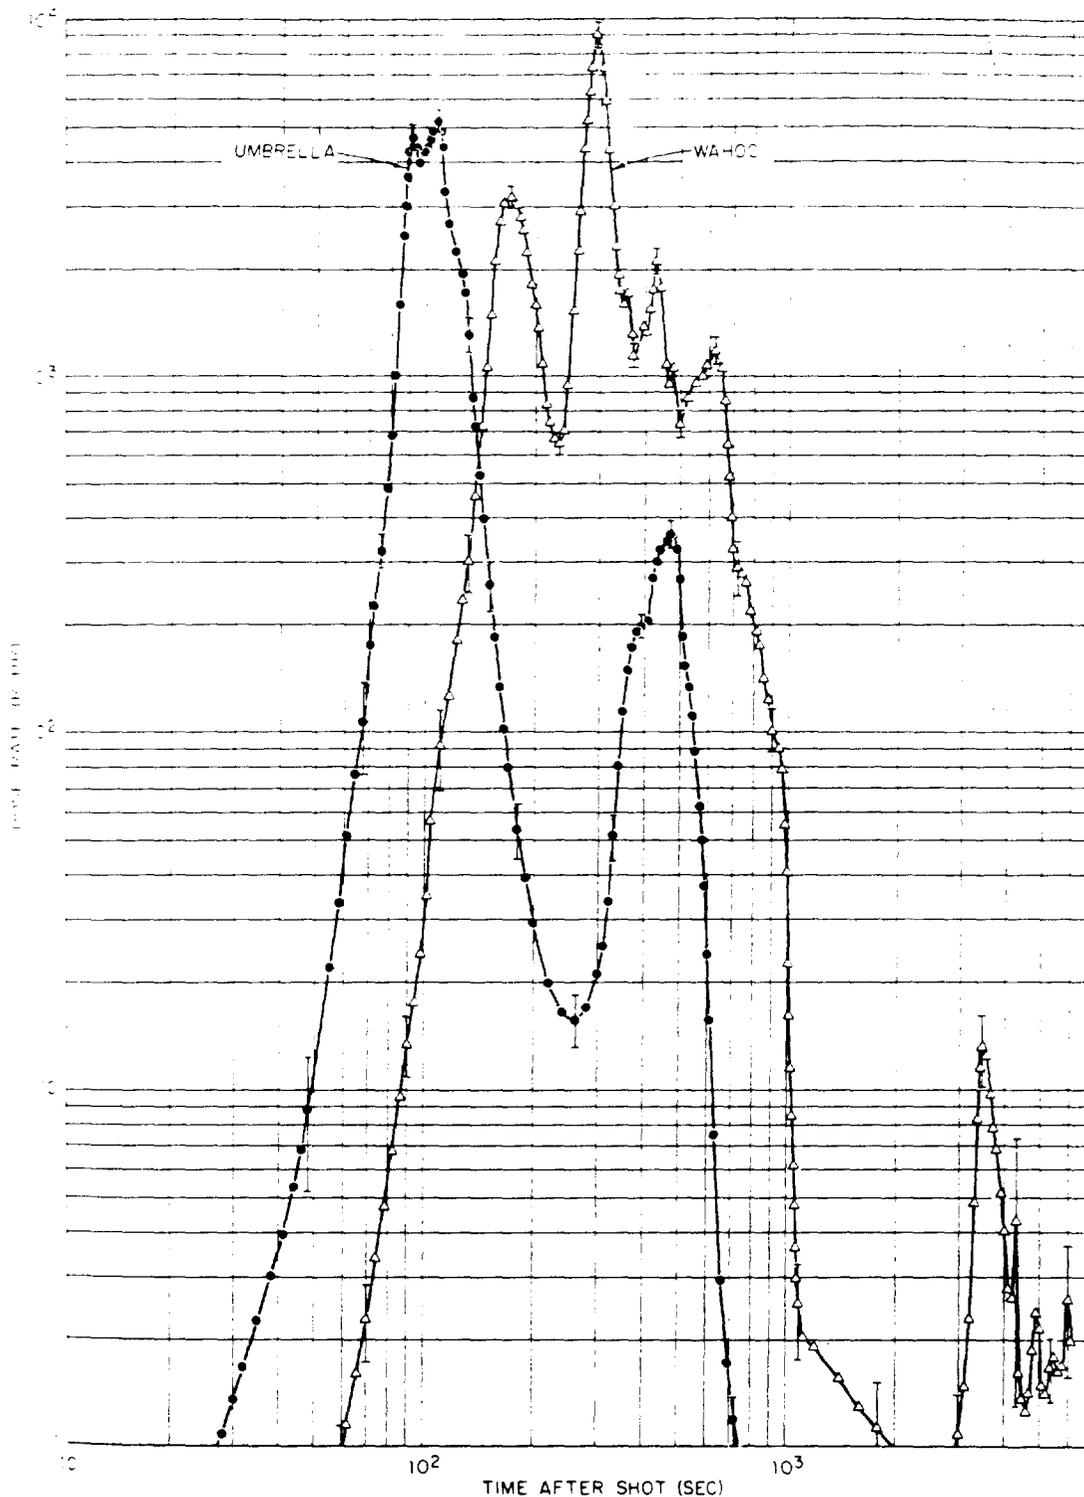


Figure 3.4 Average gamma dose rates on weather decks of DD 593, Shots Wahoo and Umbrella. Vertical bars indicate estimates of probable error.

**BEST AVAILABLE COPY**

**CONFIDENTIAL**

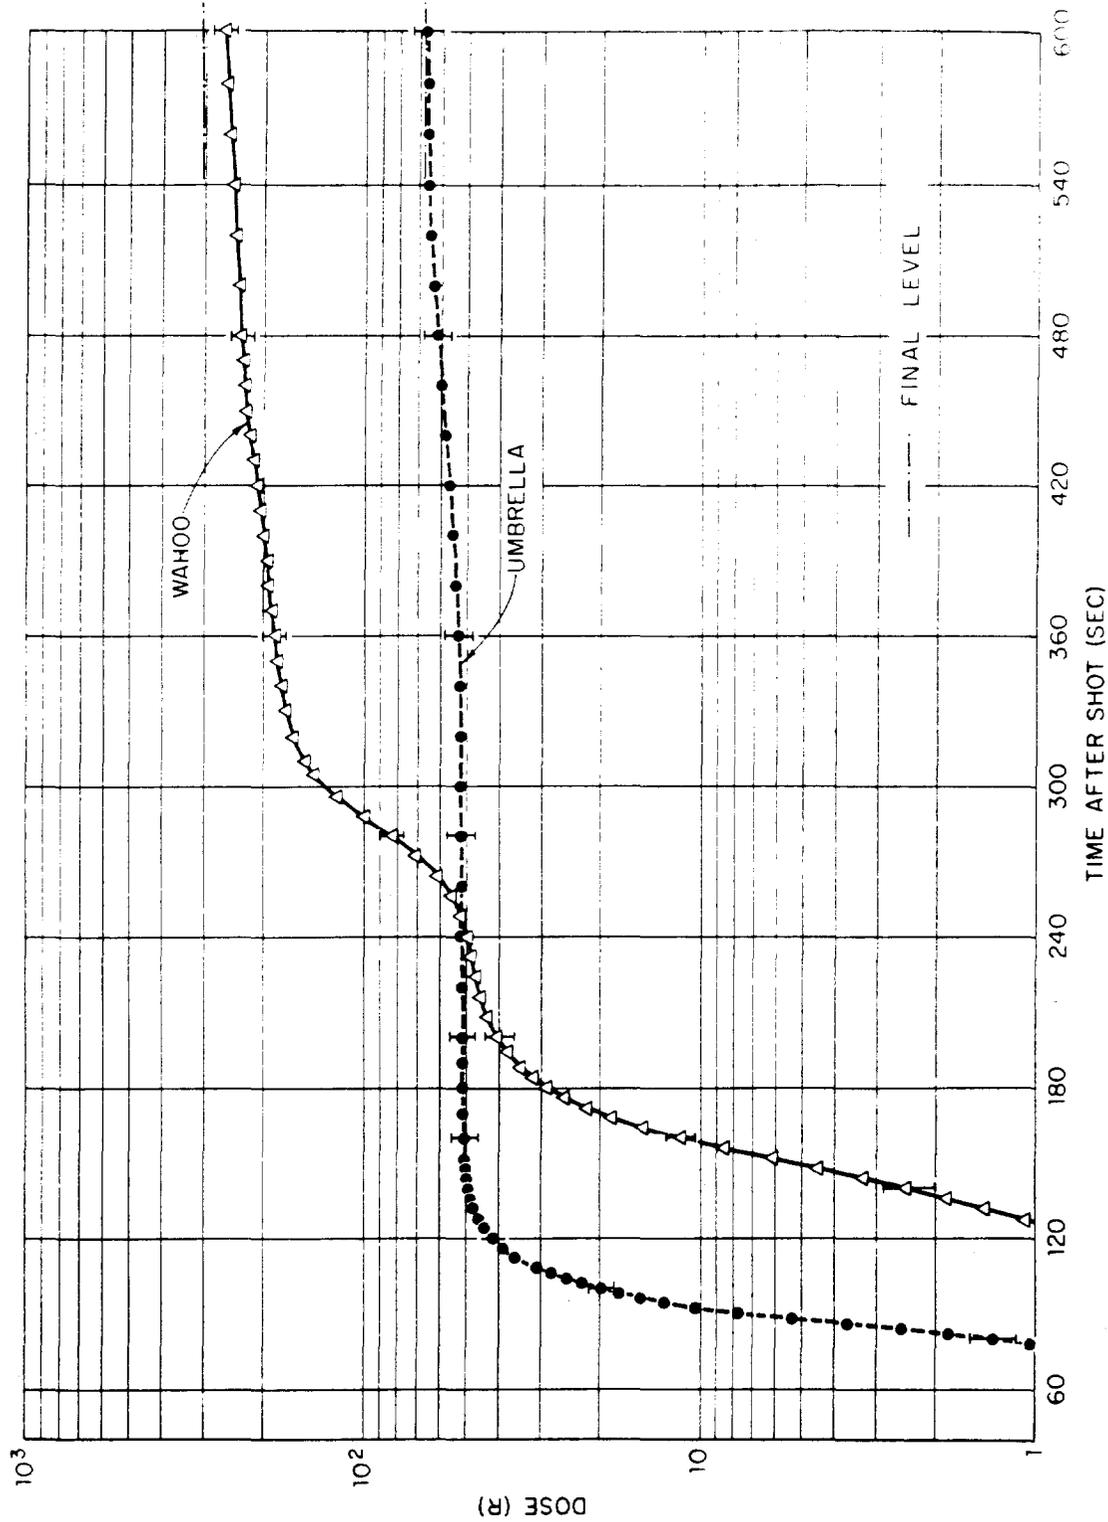


Figure 3.5 Average gamma doses on weather decks of DD 593, Shots Wahoo and Umbrella. Vertical bars indicate estimates of probable error.

~~CONFIDENTIAL~~

Figure 3.5 Average gamma doses on weather decks of DD 593, Shots Wahoo and Umbrella. Vertical bars indicate estimates of probable error.

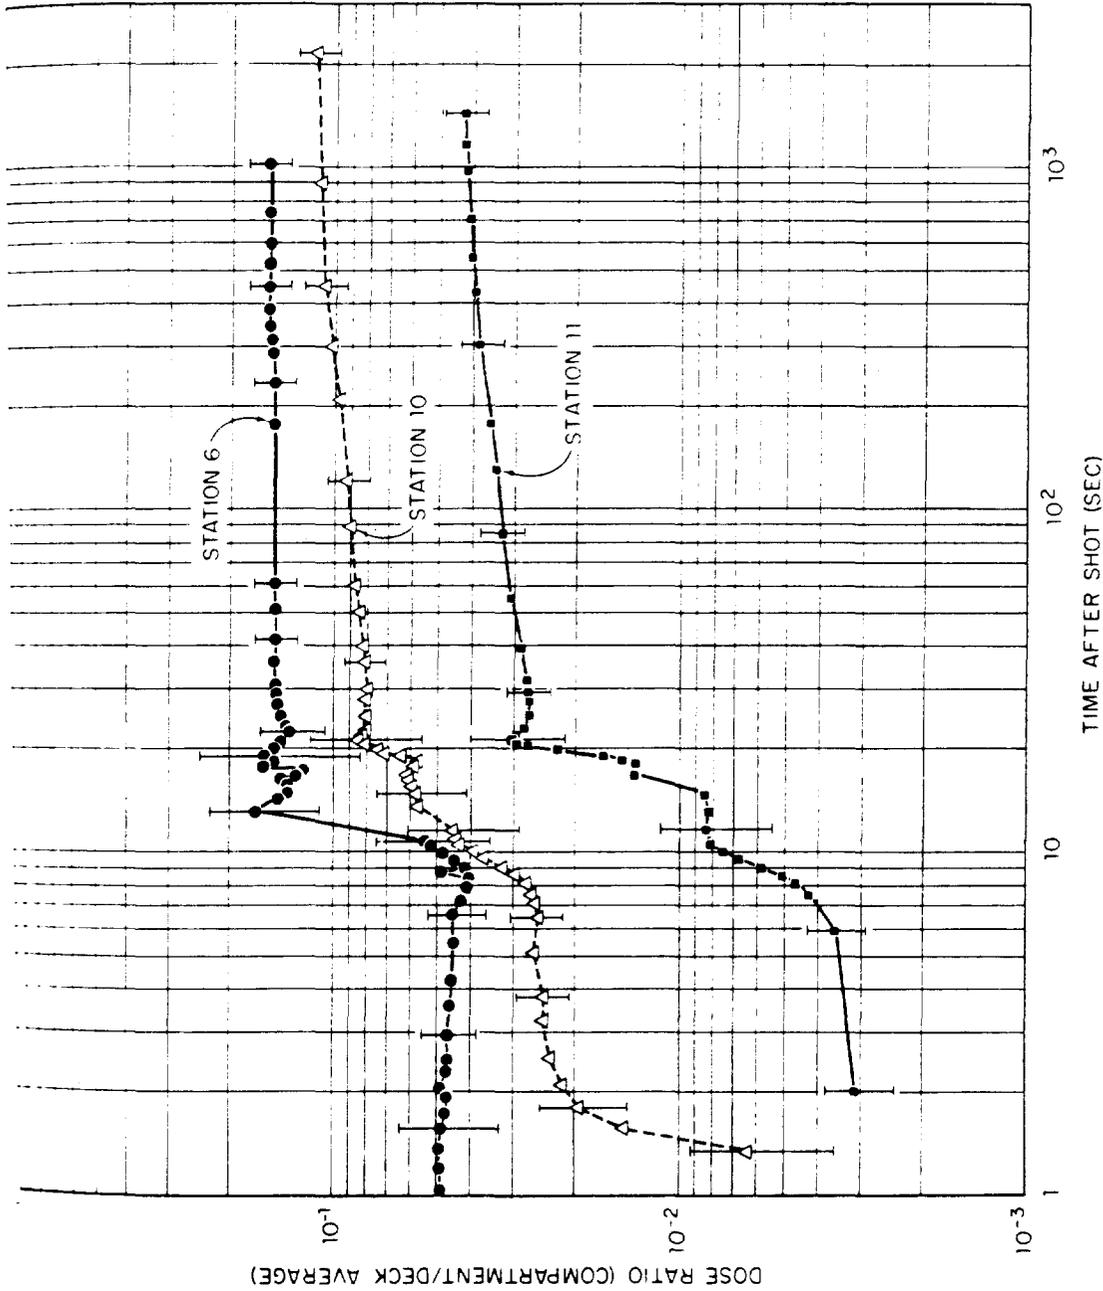


Figure 3.6 Ratios of dose in compartments to average dose on weather decks of DD 474, Shot Umbrella. Vertical bars indicate estimates of probable error.

**BEST AVAILABLE COPY**

**CONFIDENTIAL**


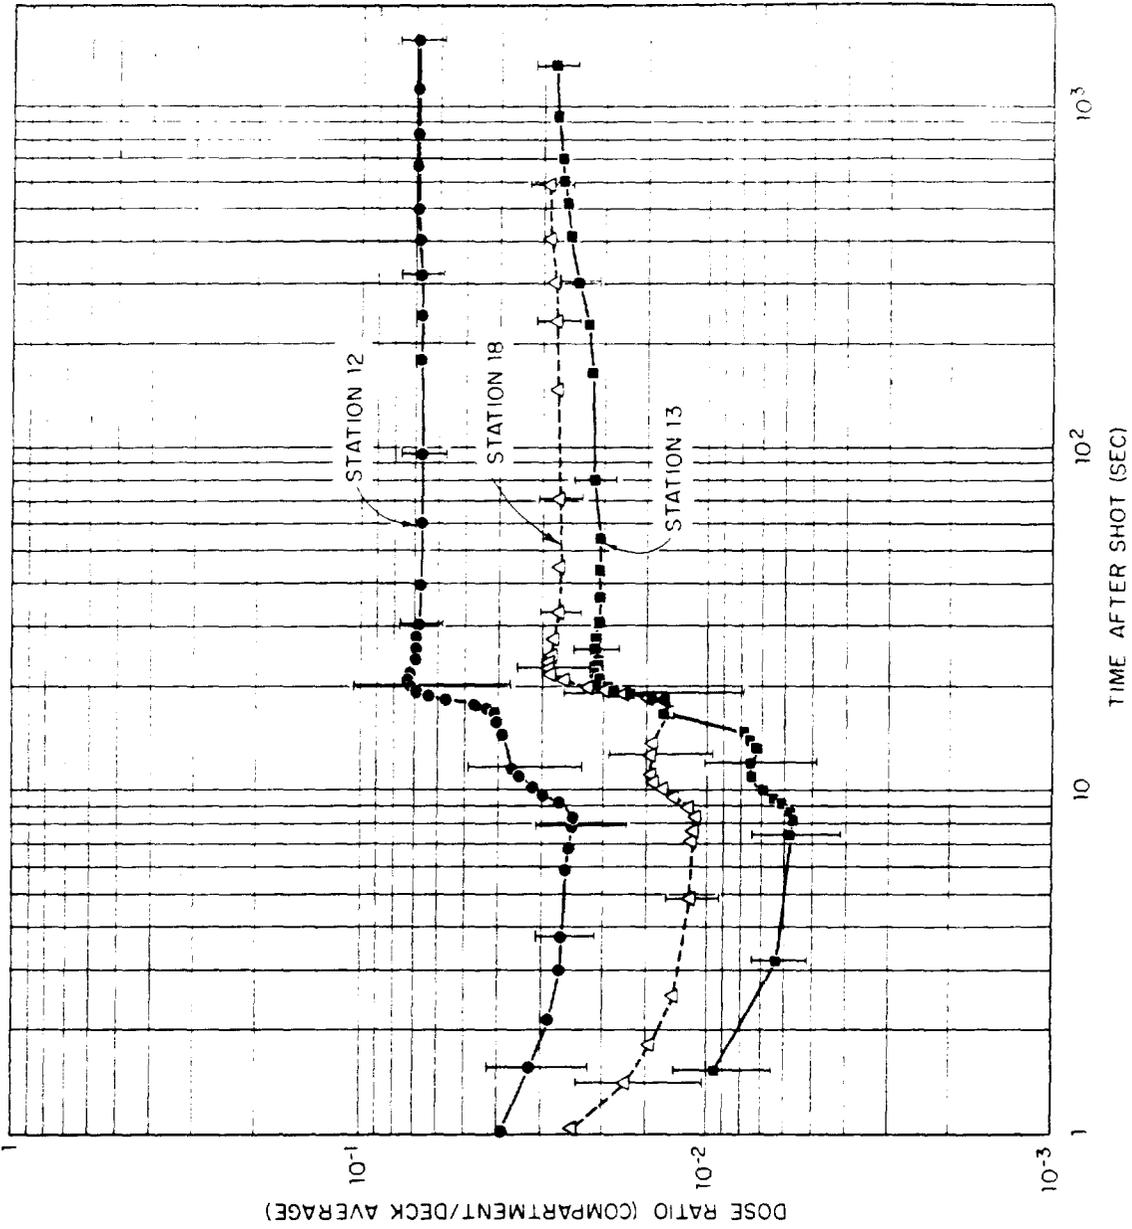


Figure 3.7 Ratios of dose in compartments to average dose on weather decks of DD 474, Shot Umbrella. Vertical bars indicate estimates of probable error.

~~CONFIDENTIAL~~

Figure 3.7 Ratios of dose in compartments to average dose on weather decks of DD 474, Shot Umbrella. Vertical bars indicate estimates of probable error.

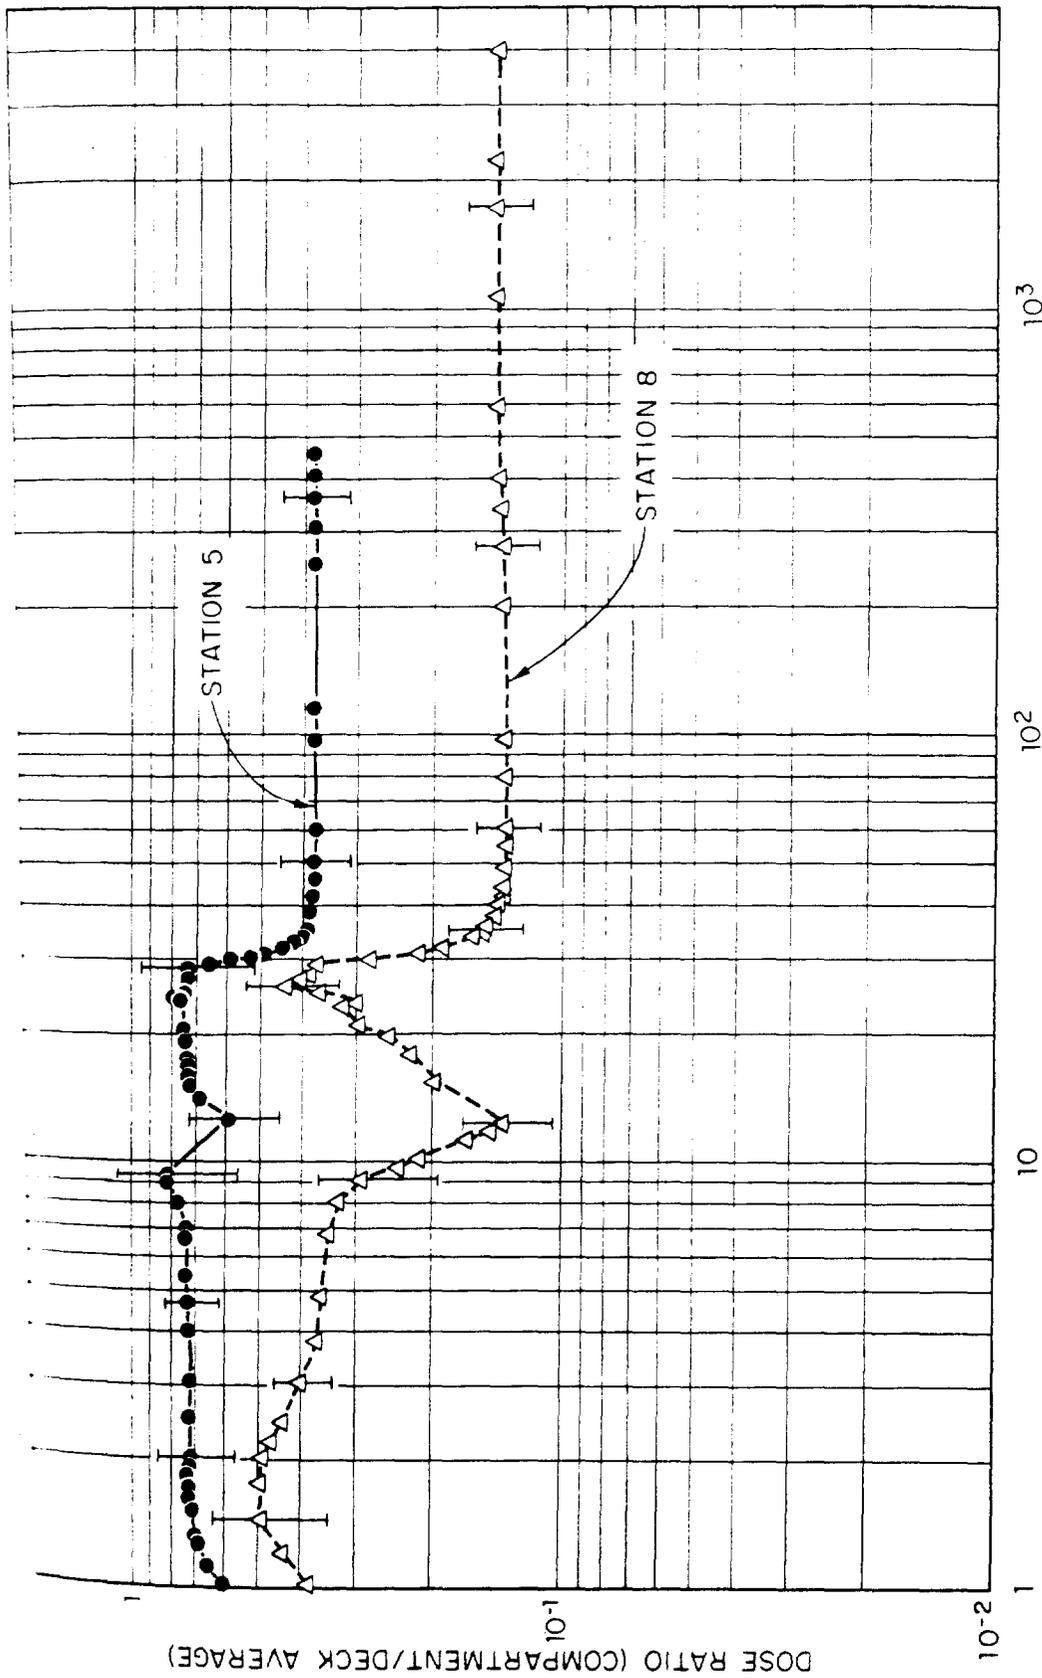

~~CONFIDENTIAL~~

Figure 3.8 Ratios of dose in compartments to average dose on weather decks of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

**BEST AVAILABLE COPY**

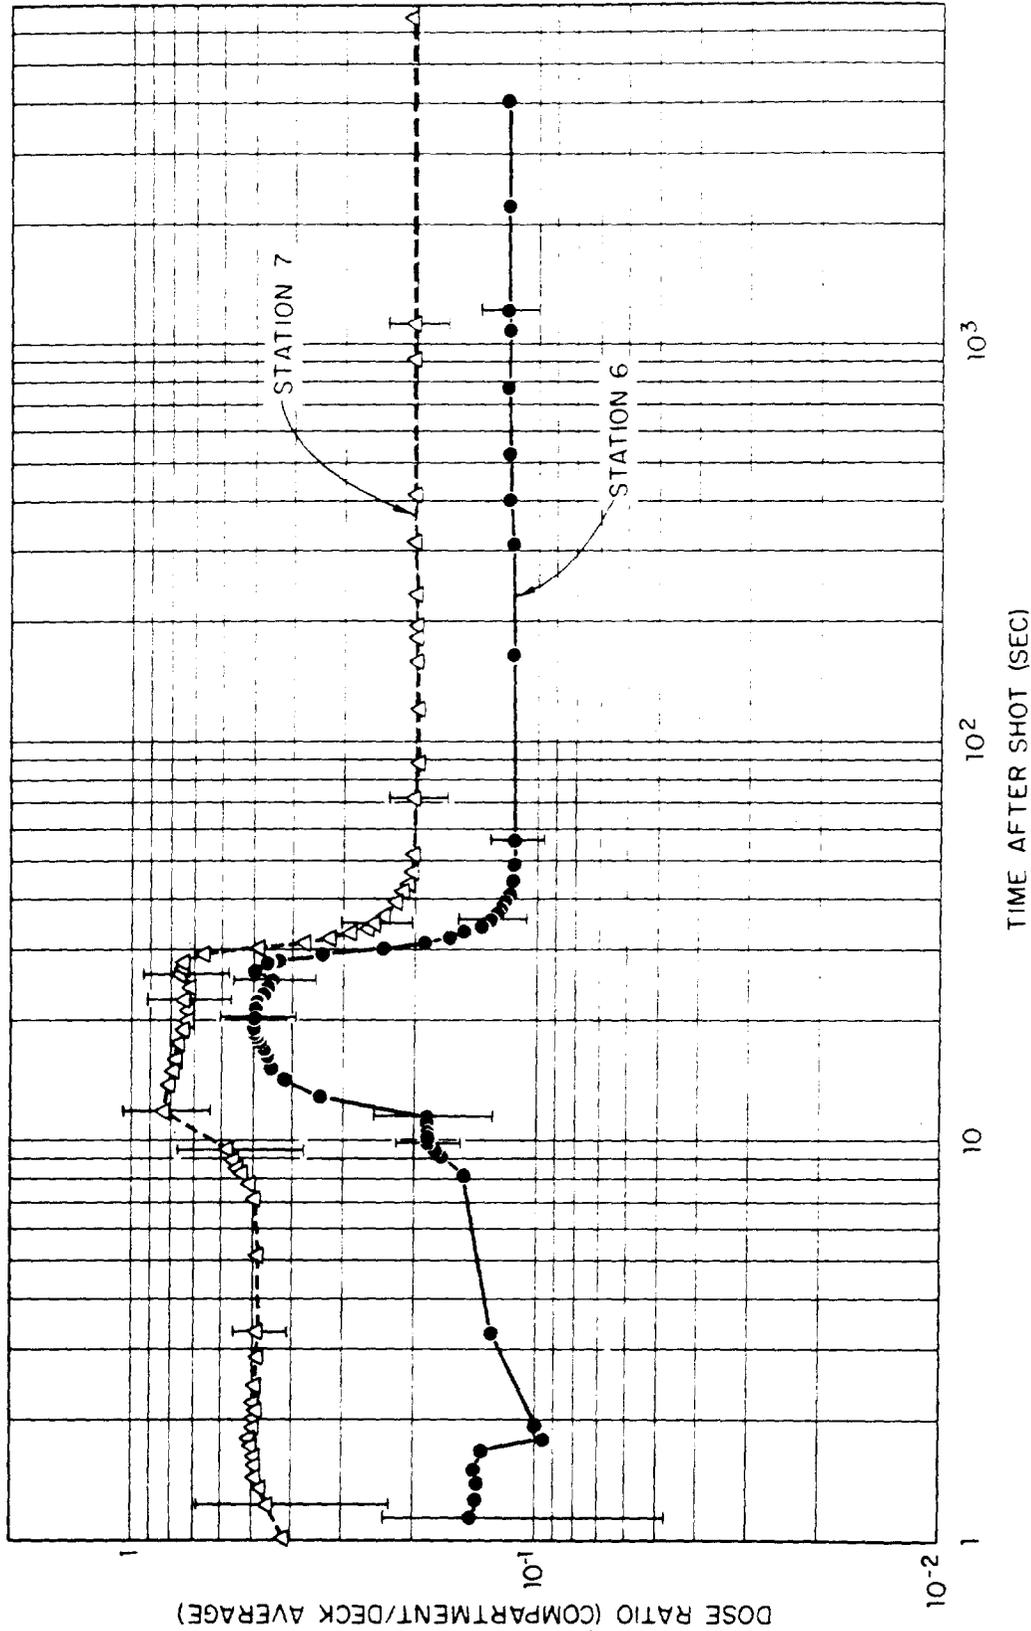


Figure 3.9 Ratios of dose in compartments to average dose on weather decks of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

Figure 3.9 Ratios of dose in compartments to average dose estimates in compartments of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

**BEST AVAILABLE COPY**

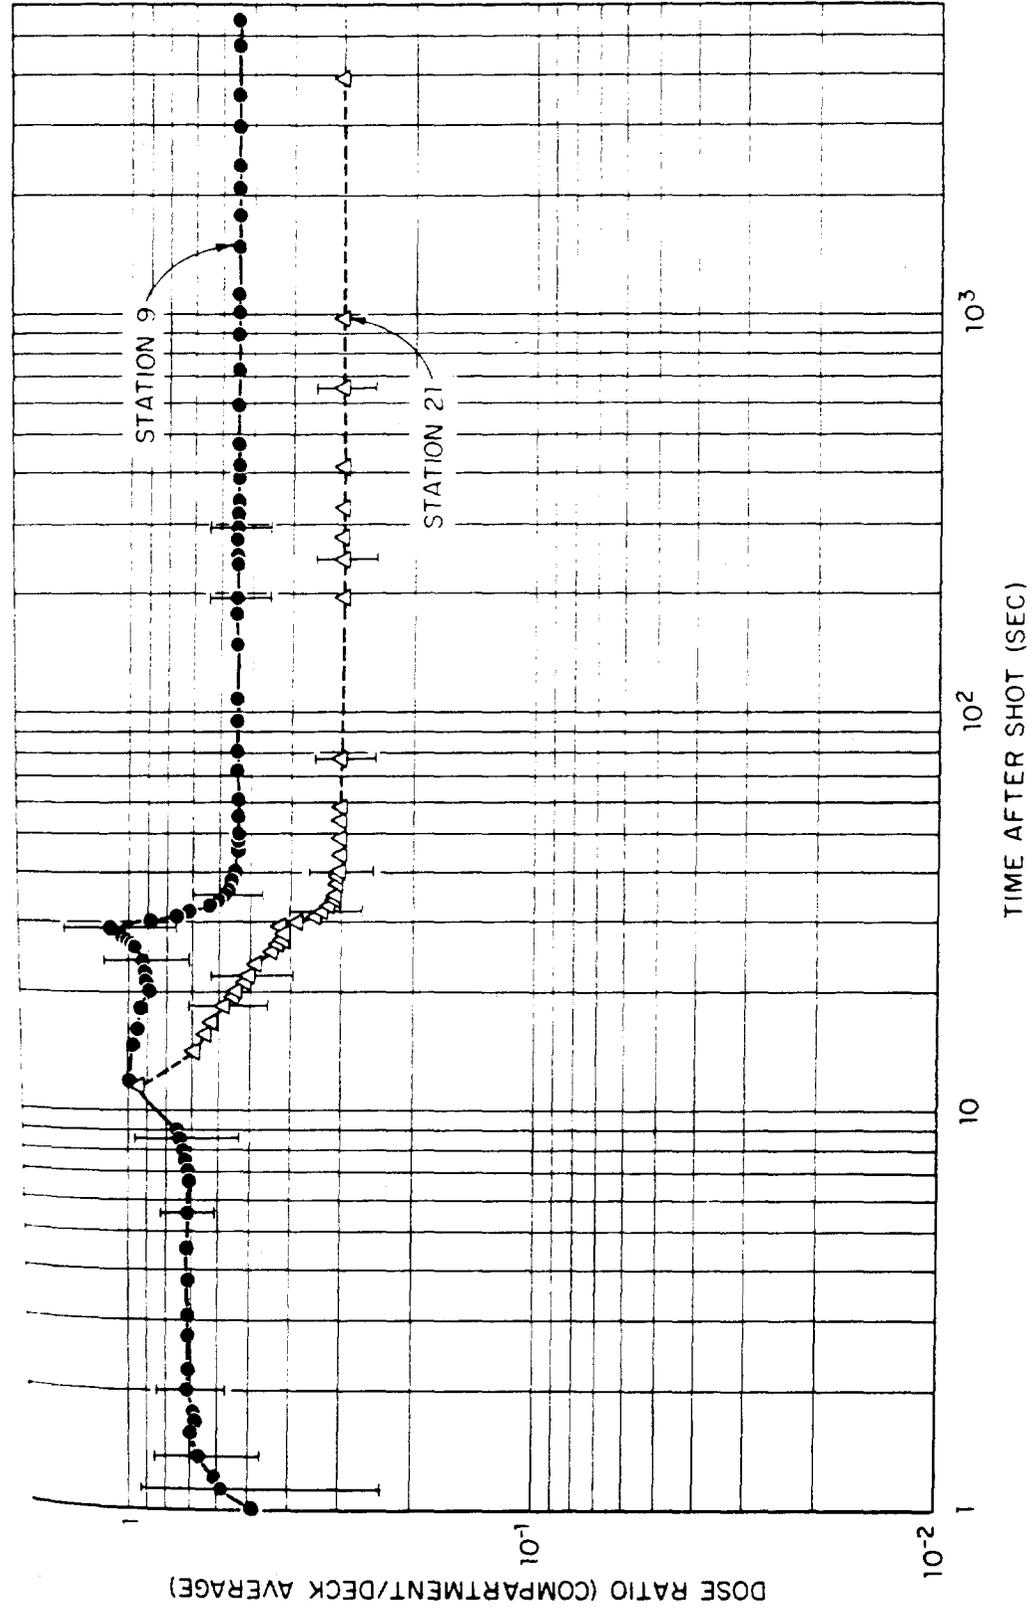


Figure 3.10 Ratios of dose in compartments to average dose on weather decks of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

~~CONFIDENTIAL~~

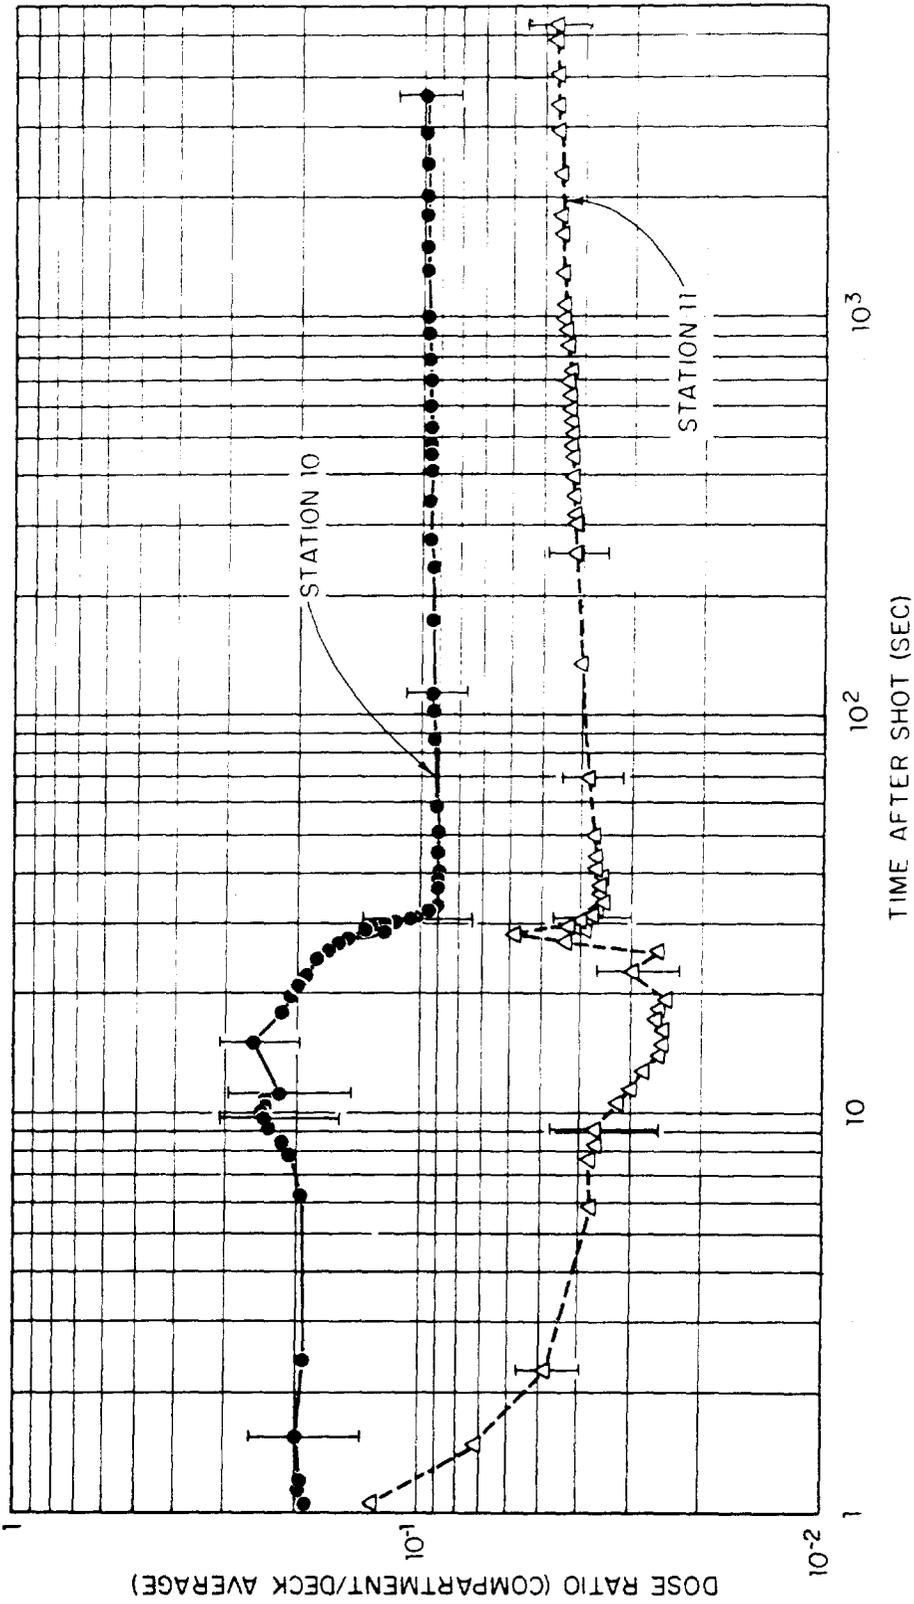


Figure 3.11 Ratios of dose in compartments to average dose on weather decks of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

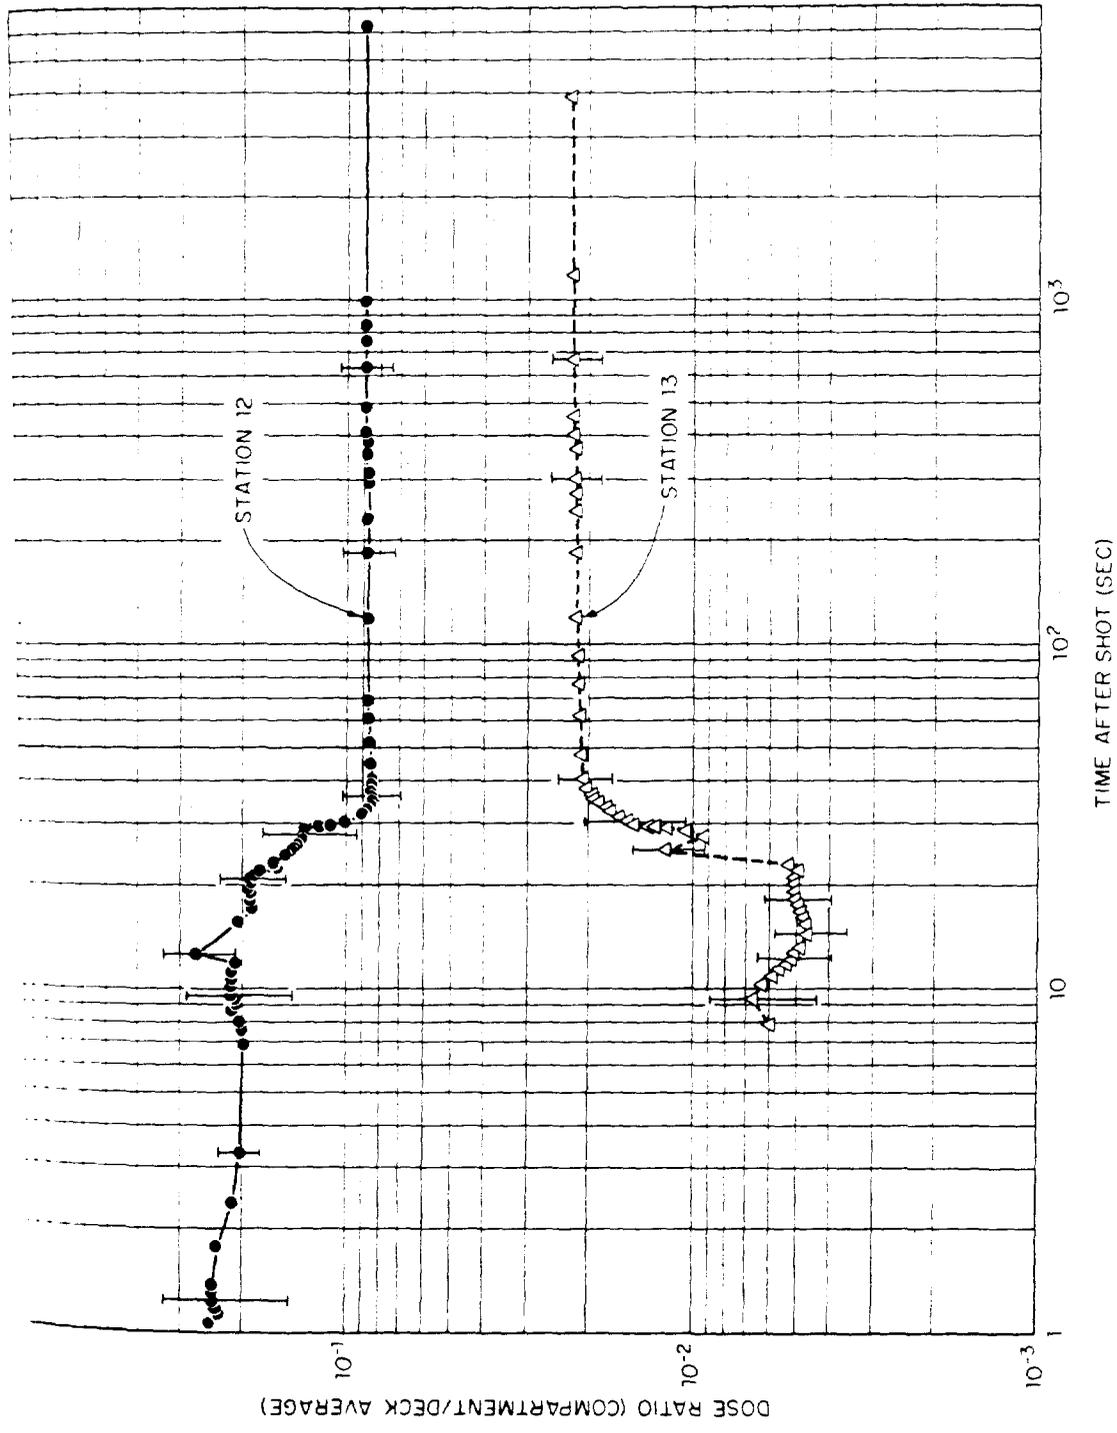


Figure 3.12 Ratios of dose in compartments to average dose on weather decks of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

~~CONFIDENTIAL~~

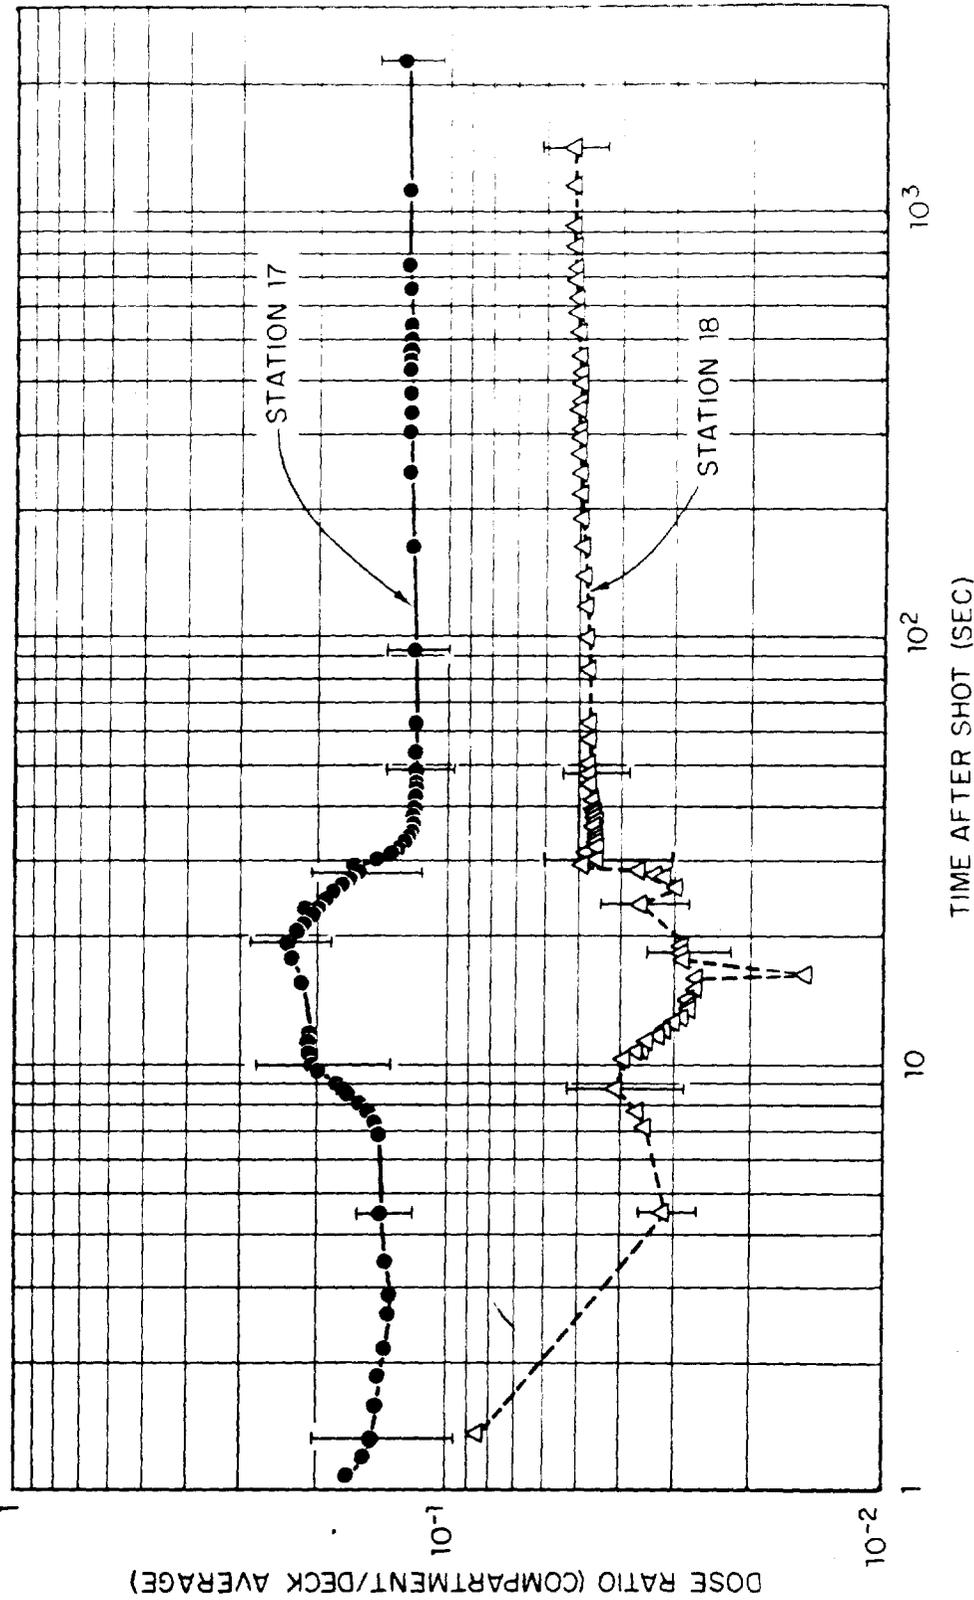


Figure 3.13 Ratios of dose in compartments to average dose on weather decks of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

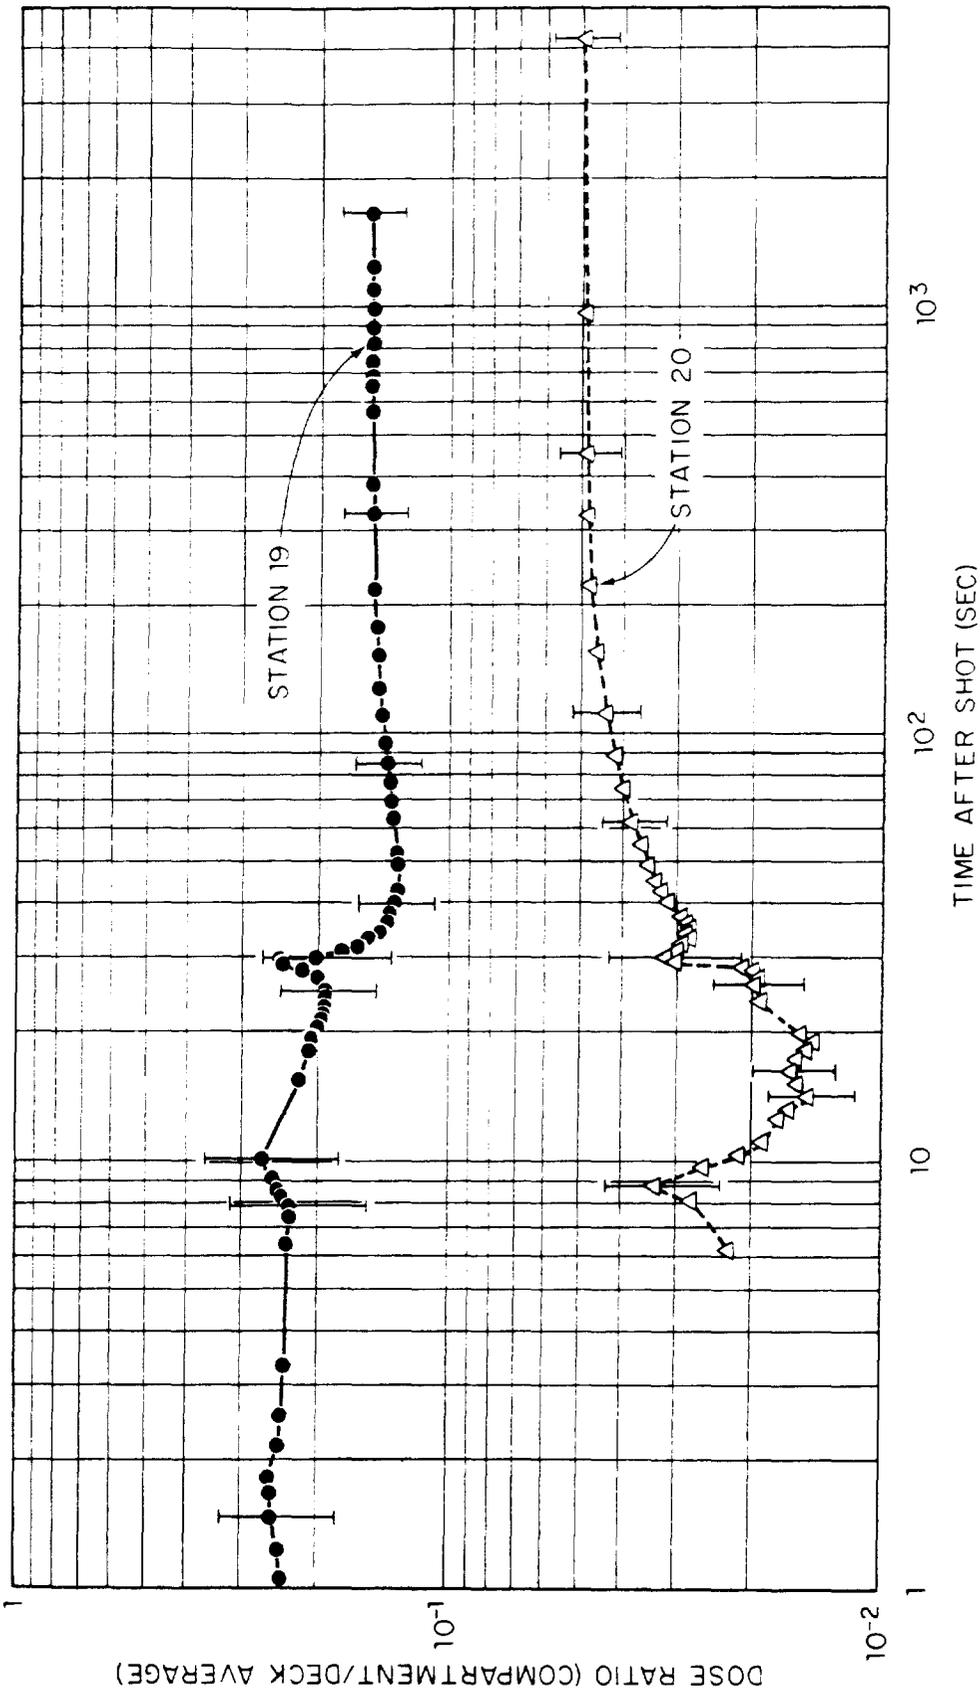


Figure 3.14 Ratios of dose in compartments to average dose on weather decks of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

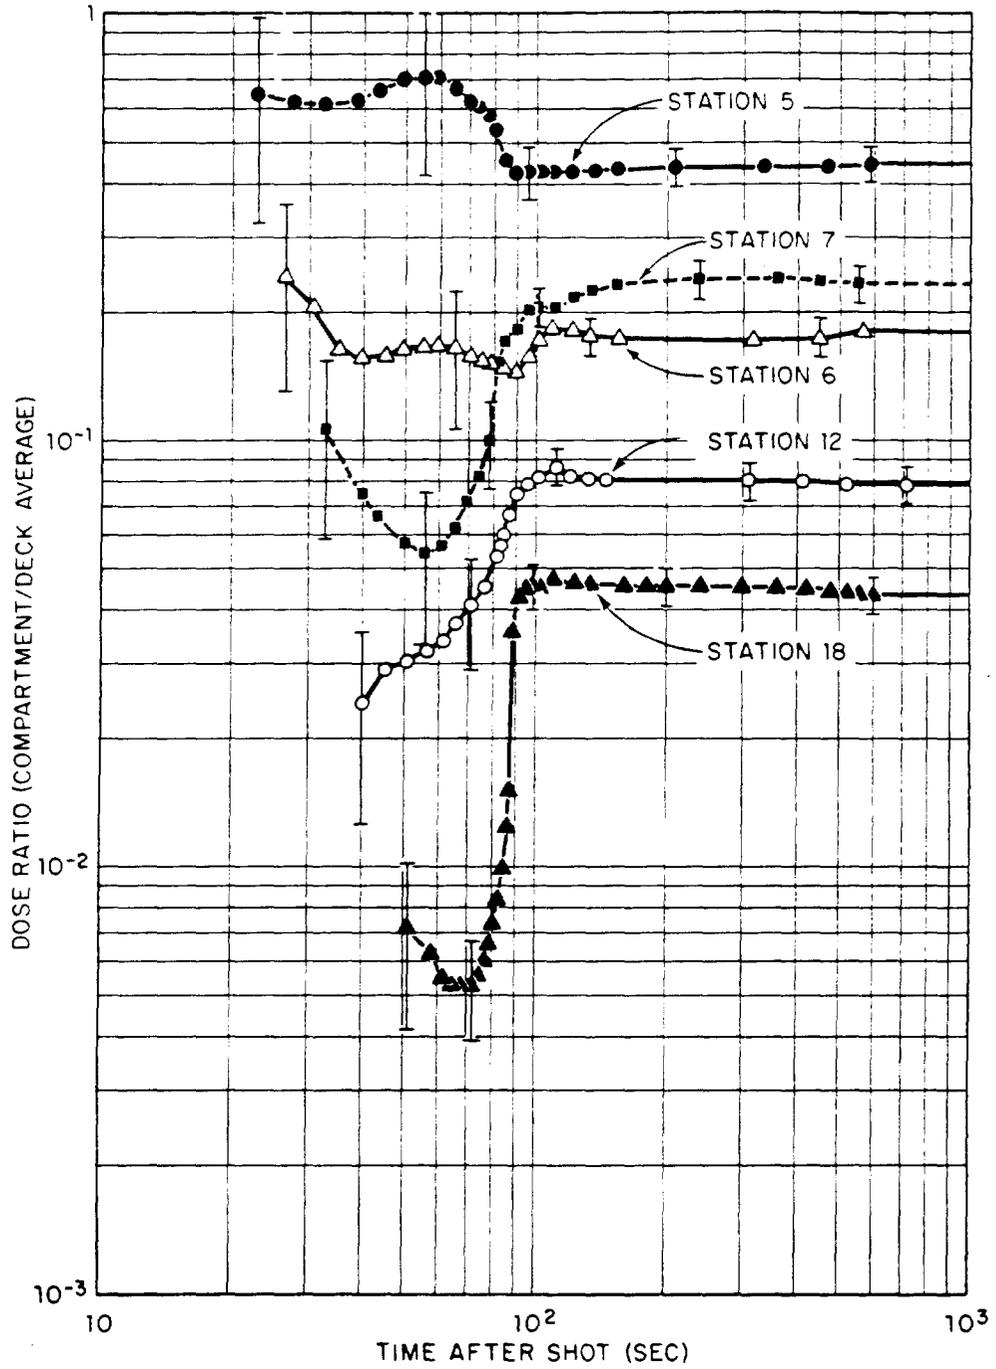


Figure 3.15 Ratios of dose in compartments to average dose on weather decks of DD 593, Shot Umbrella. Vertical bars indicate estimates of probable error.

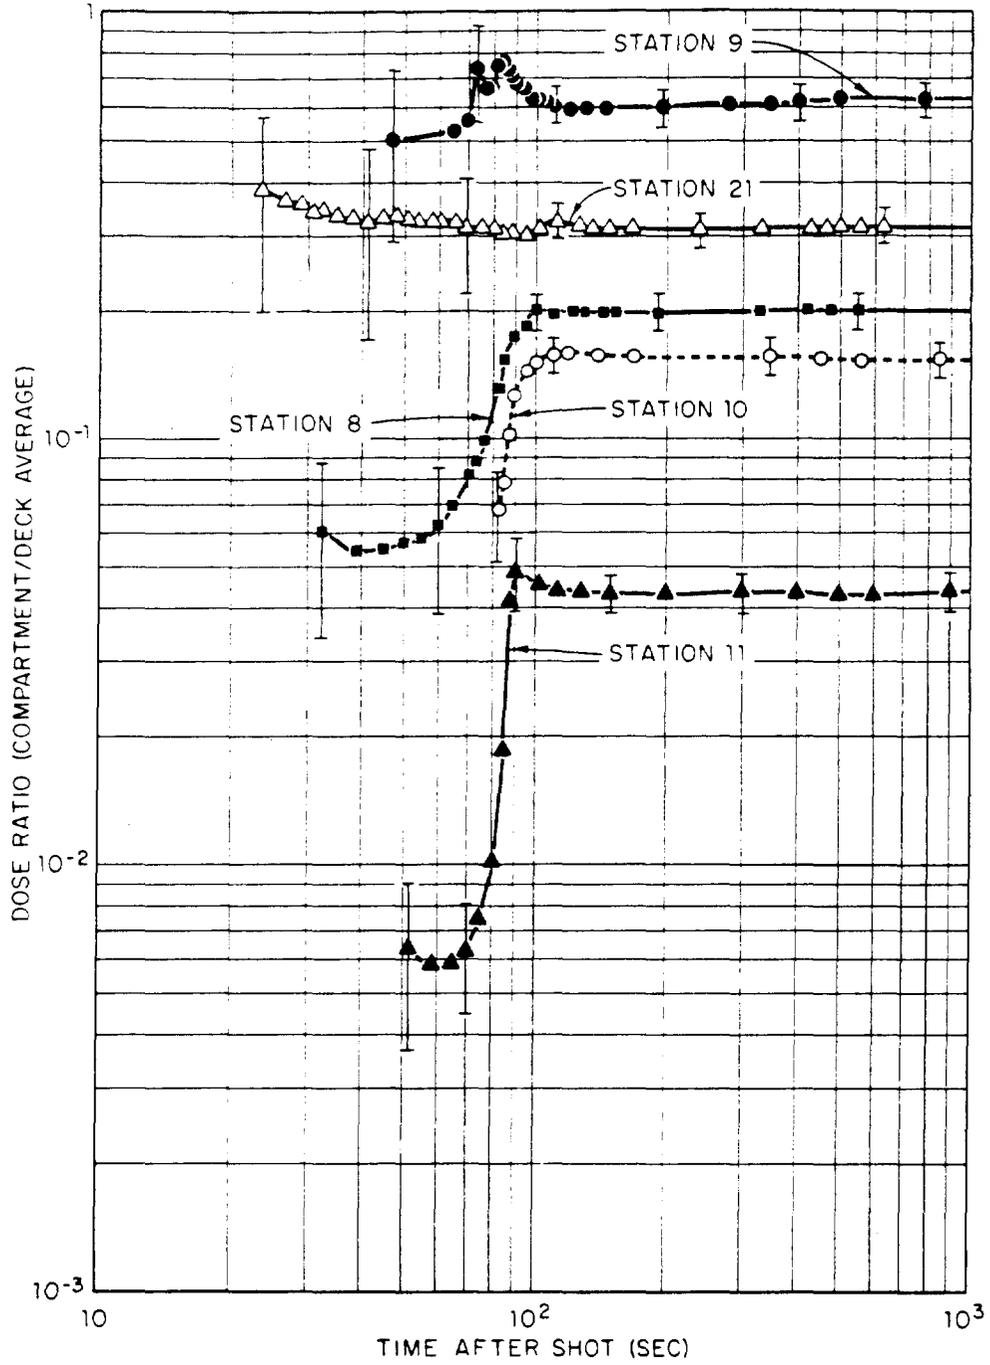


Figure 3.16 Ratios of dose in compartments to average dose on weather decks of DD 593, Shot Umbrella. Vertical bars indicate estimates of probable error.

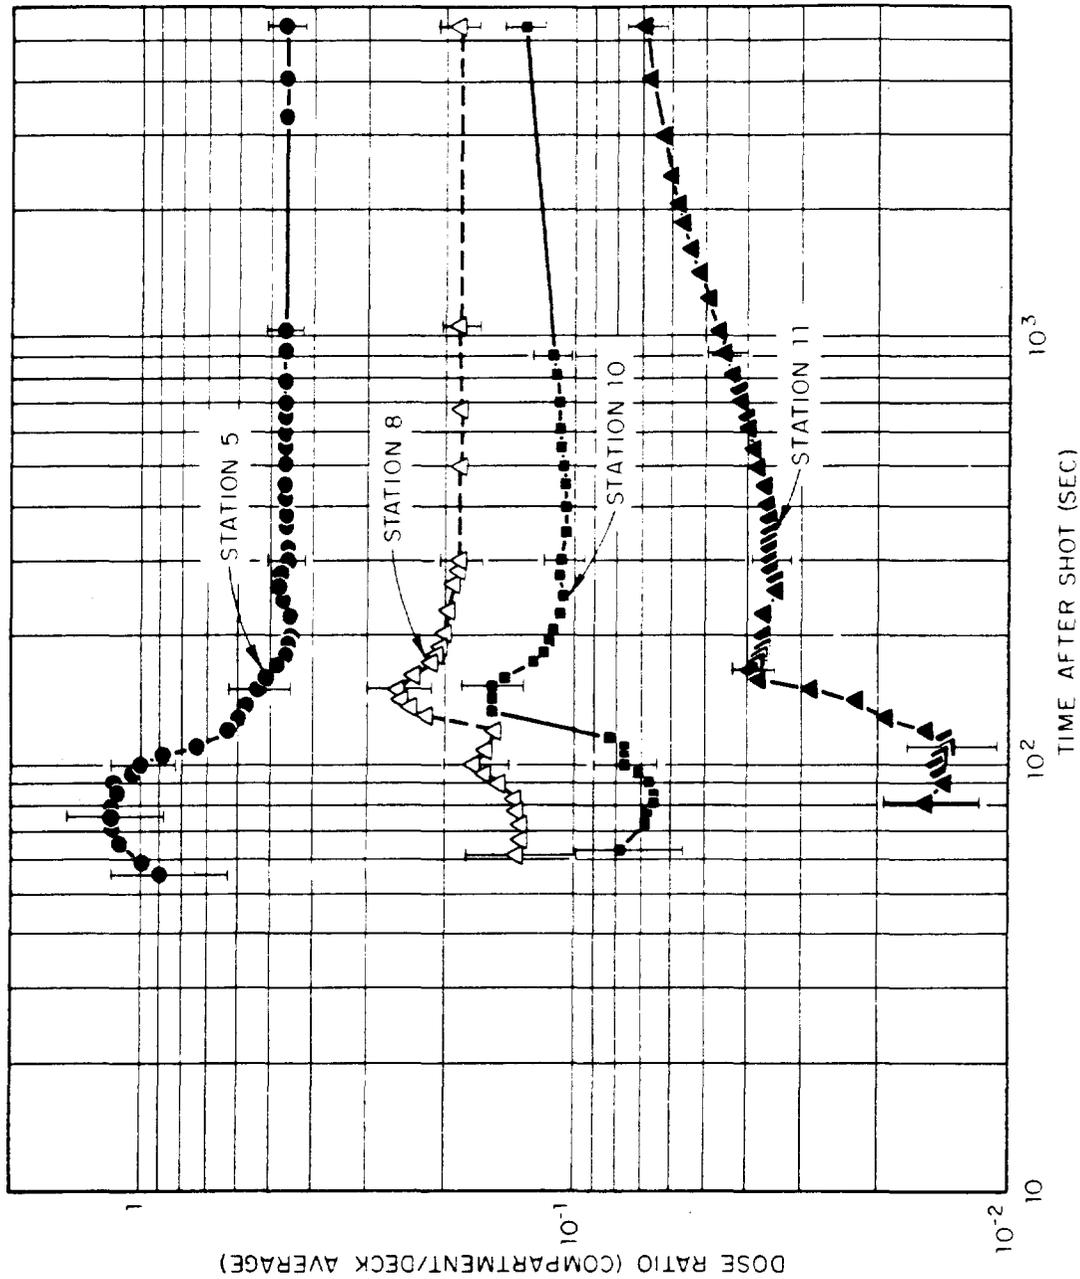


Figure 3.17 Ratios of dose in compartments to average dose on weather decks of DD 593, Shot Wahoo. Vertical bars indicate estimates of probable error.

Figure 3.17 Ratios of dose in compartments to average dose on weather decks of DD 593, Shot Wahoo. Vertical bars indicate estimates of probable error.

**BEST AVAILABLE COPY**

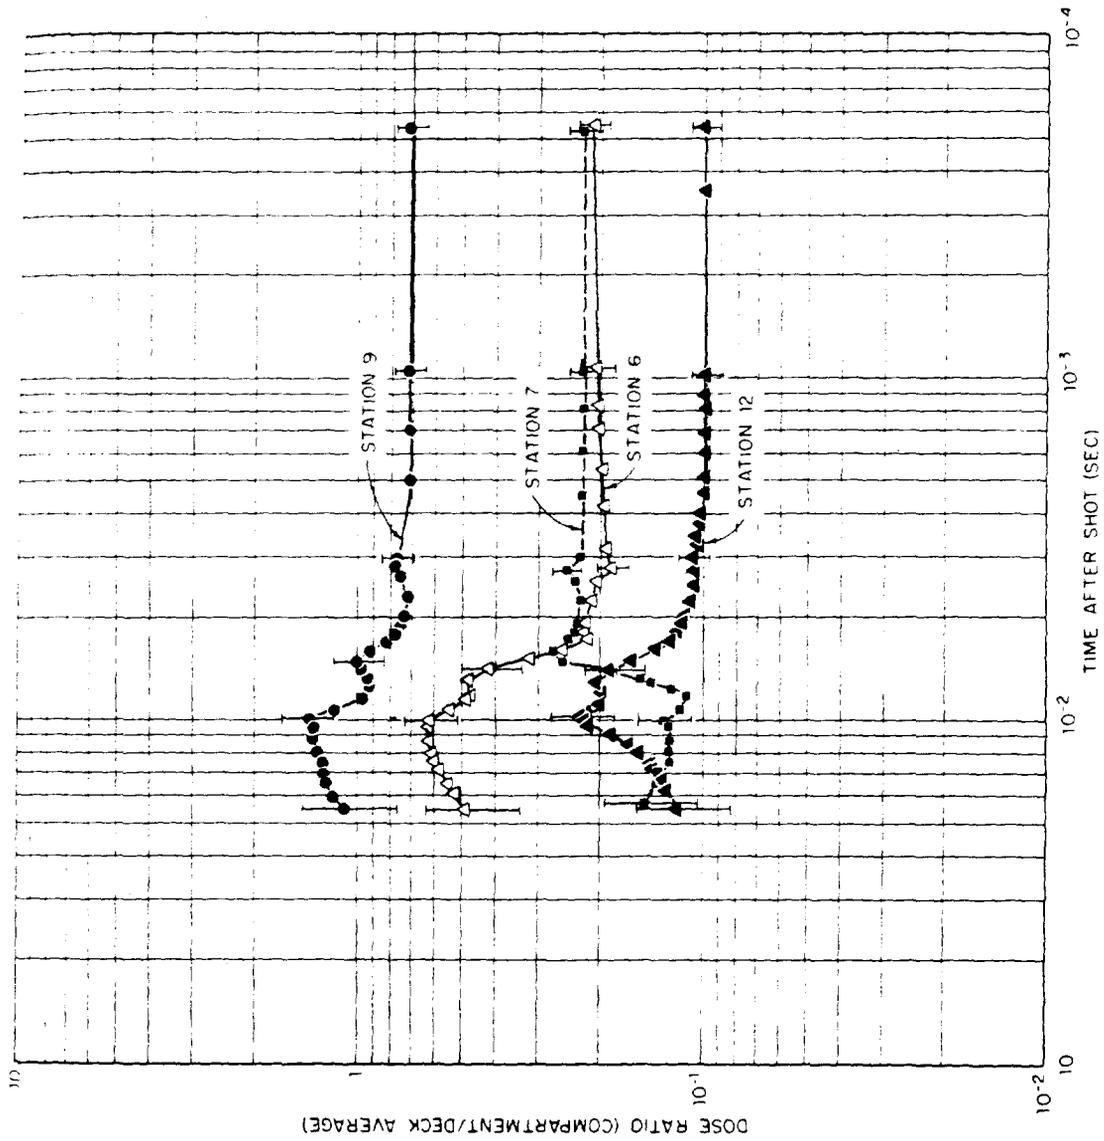


Figure 3.18 Ratios of dose in compartments to average dose on weather decks of DD 593, Shot Wahoo. Vertical bars indicate estimates of probable error.

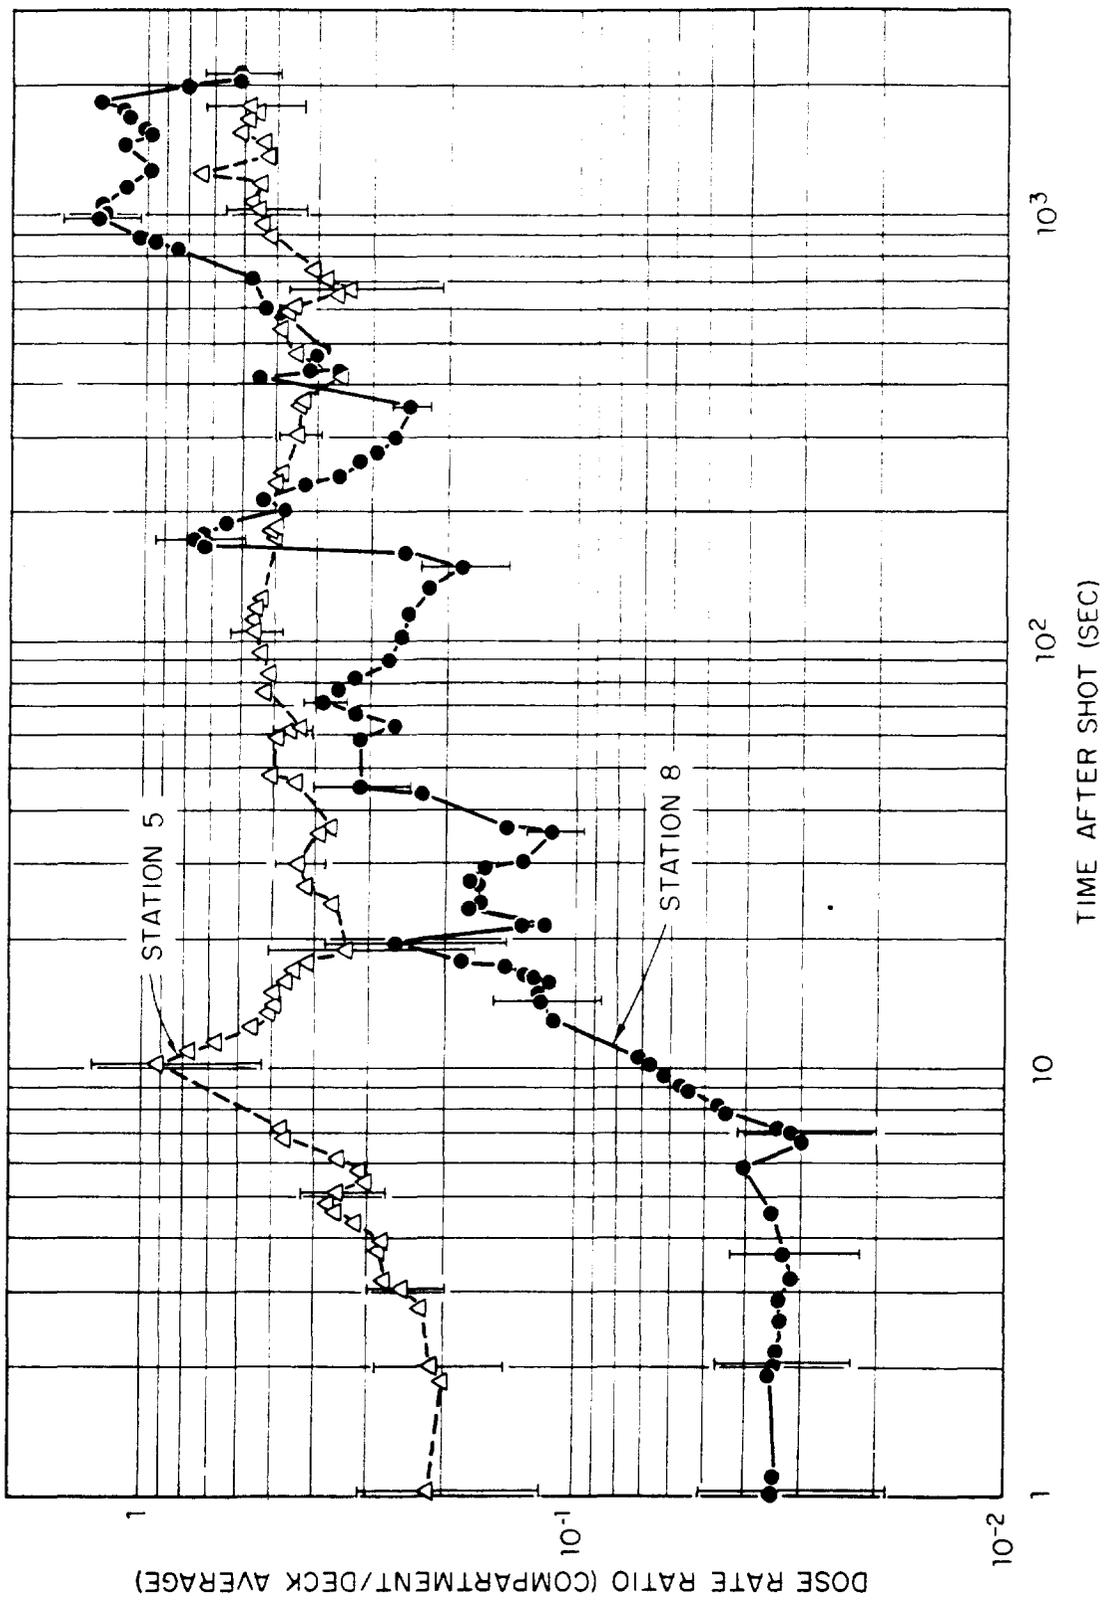


Figure 3.19 Ratios of dose rate in compartments to average dose rate on weather decks of DD 474, Shot Umbrella. Vertical bars indicate estimates of probable error.

**BEST AVAILABLE COPY**

Figure 3.19 Ratios of dose rate in compartments to average dose rate on weather decks of DD 474, Shot Umbrella. Vertical bars indicate estimates of probable error.

**BEST AVAILABLE COPY**

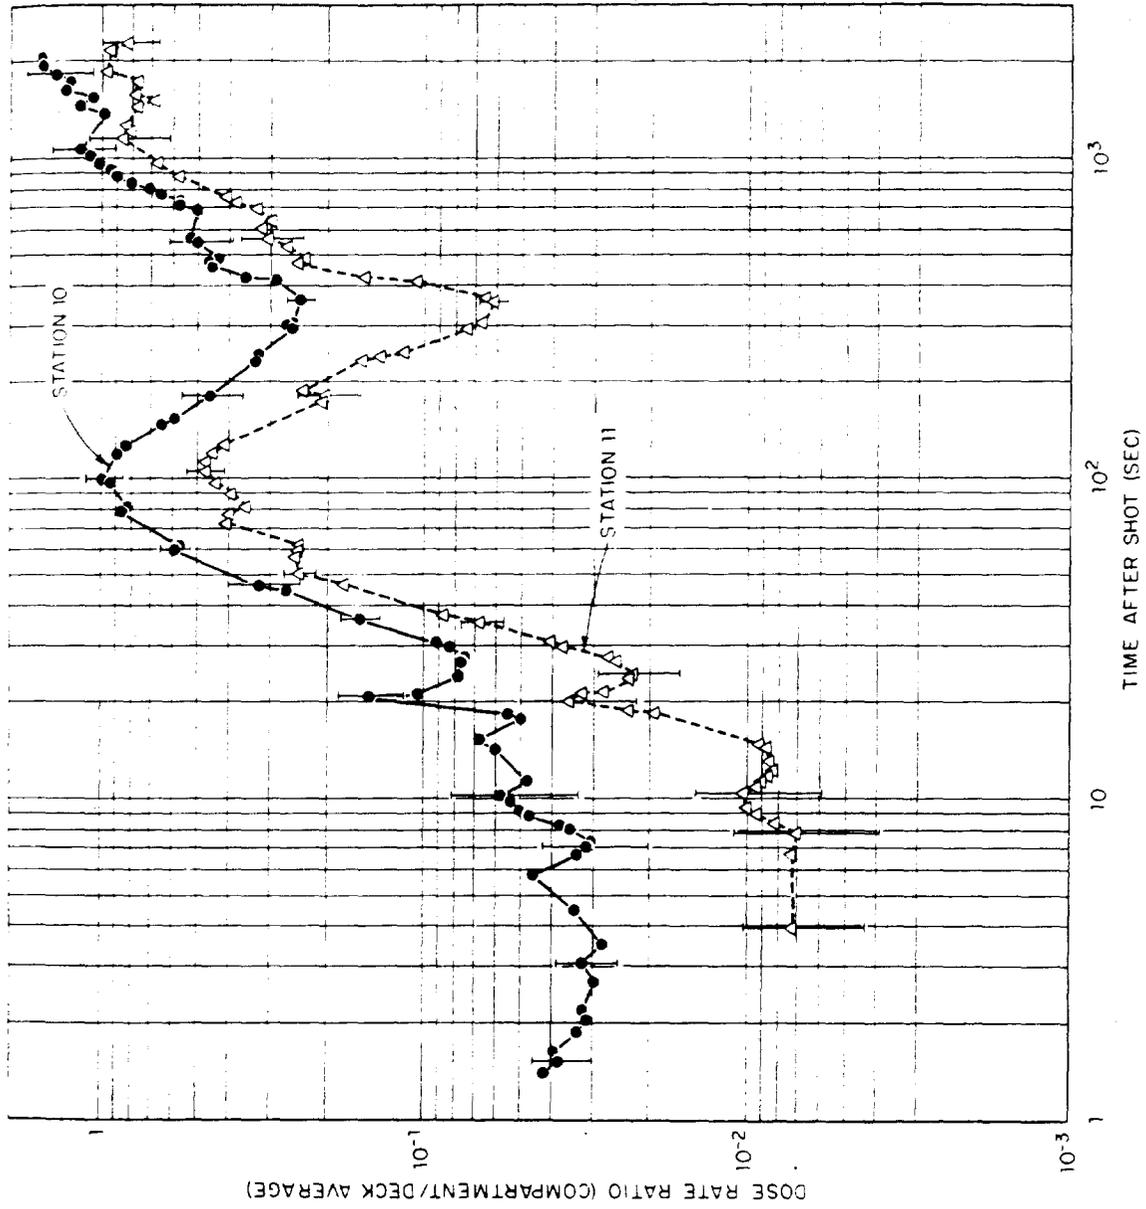


Figure 3.20 Ratios of dose rate in compartments to average dose rate on weather decks of DD 474, Shot Umbrella. Vertical bars indicate estimates of probable error.

**CONFIDENTIAL**

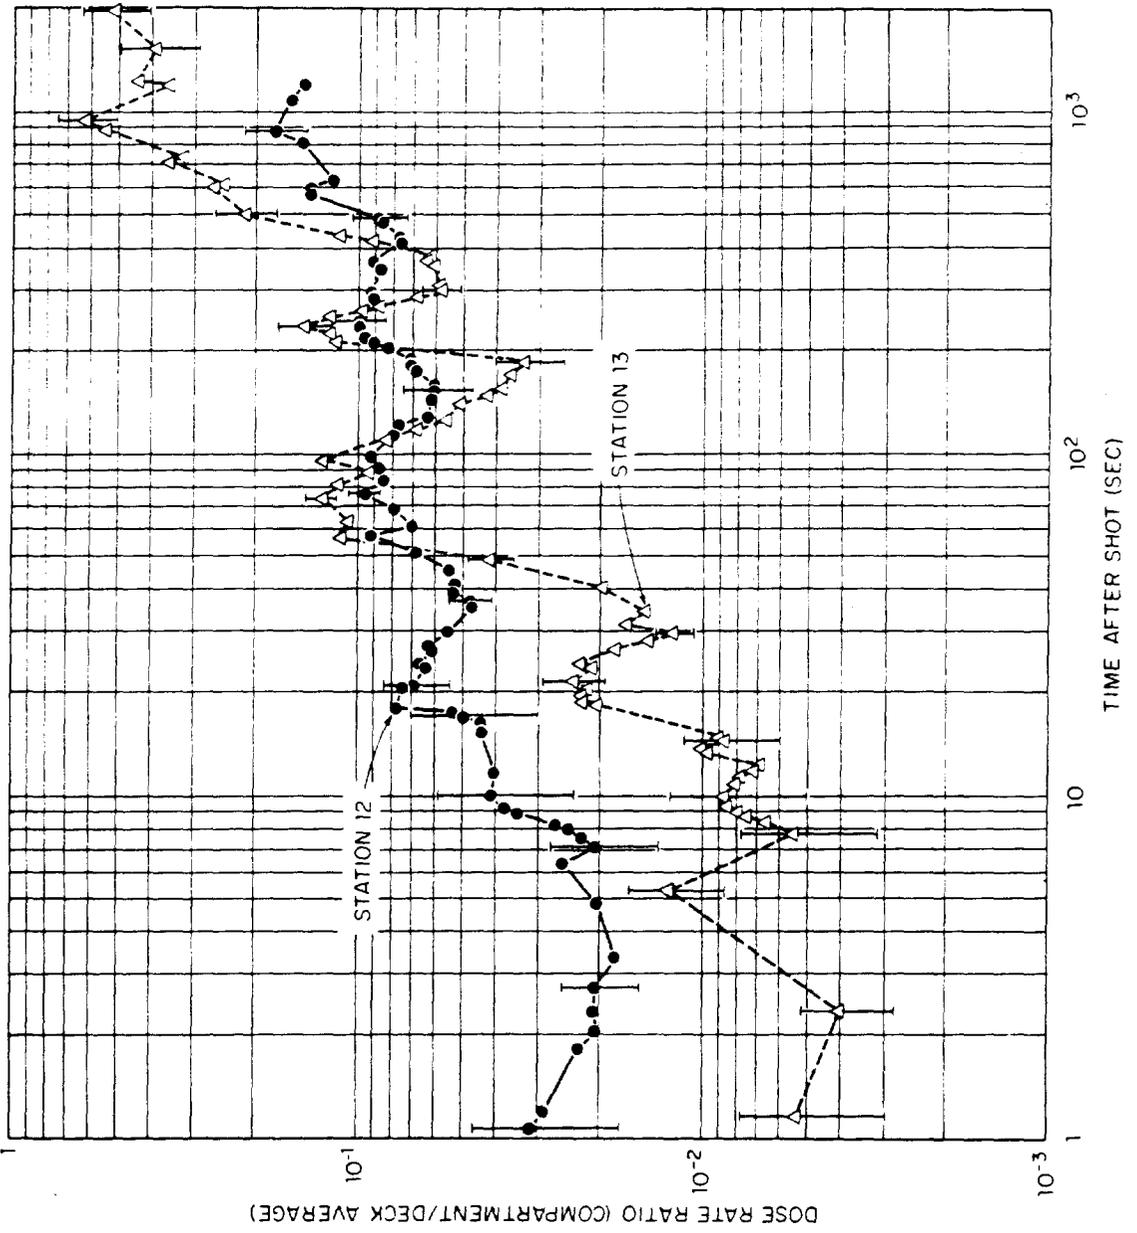


Figure 3.21 Ratios of dose rate in compartments to average dose rate on weather decks of DD 474, Shot Umbrella. Vertical bars indicate estimates of probable error.

~~CONFIDENTIAL~~

BEST AVAILABLE COPY

Figure 3.21 Ratios of dose rate in compartments to average dose rate on weather decks of DD 474, Shot Umbrella. Vertical bars indicate estimates of probable error.

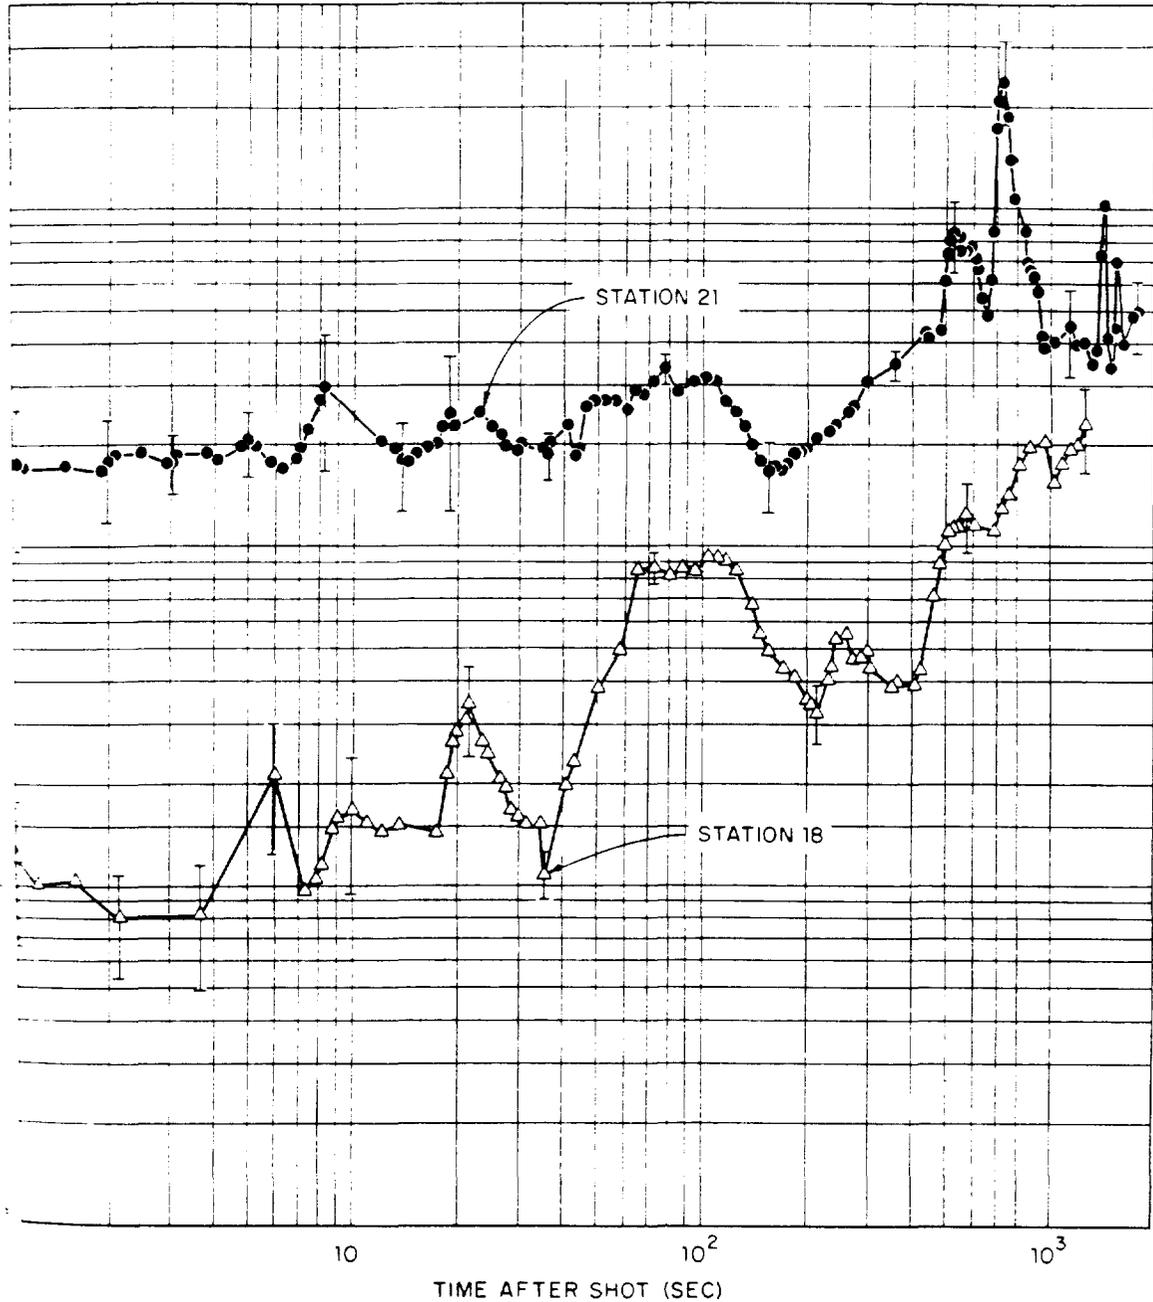


Figure 3.22 Ratios of dose rate in compartments to average dose rate on weather decks of DD 474, Shot Umbrella. Vertical bars indicate estimates of probable error.

CONFIDENTIAL

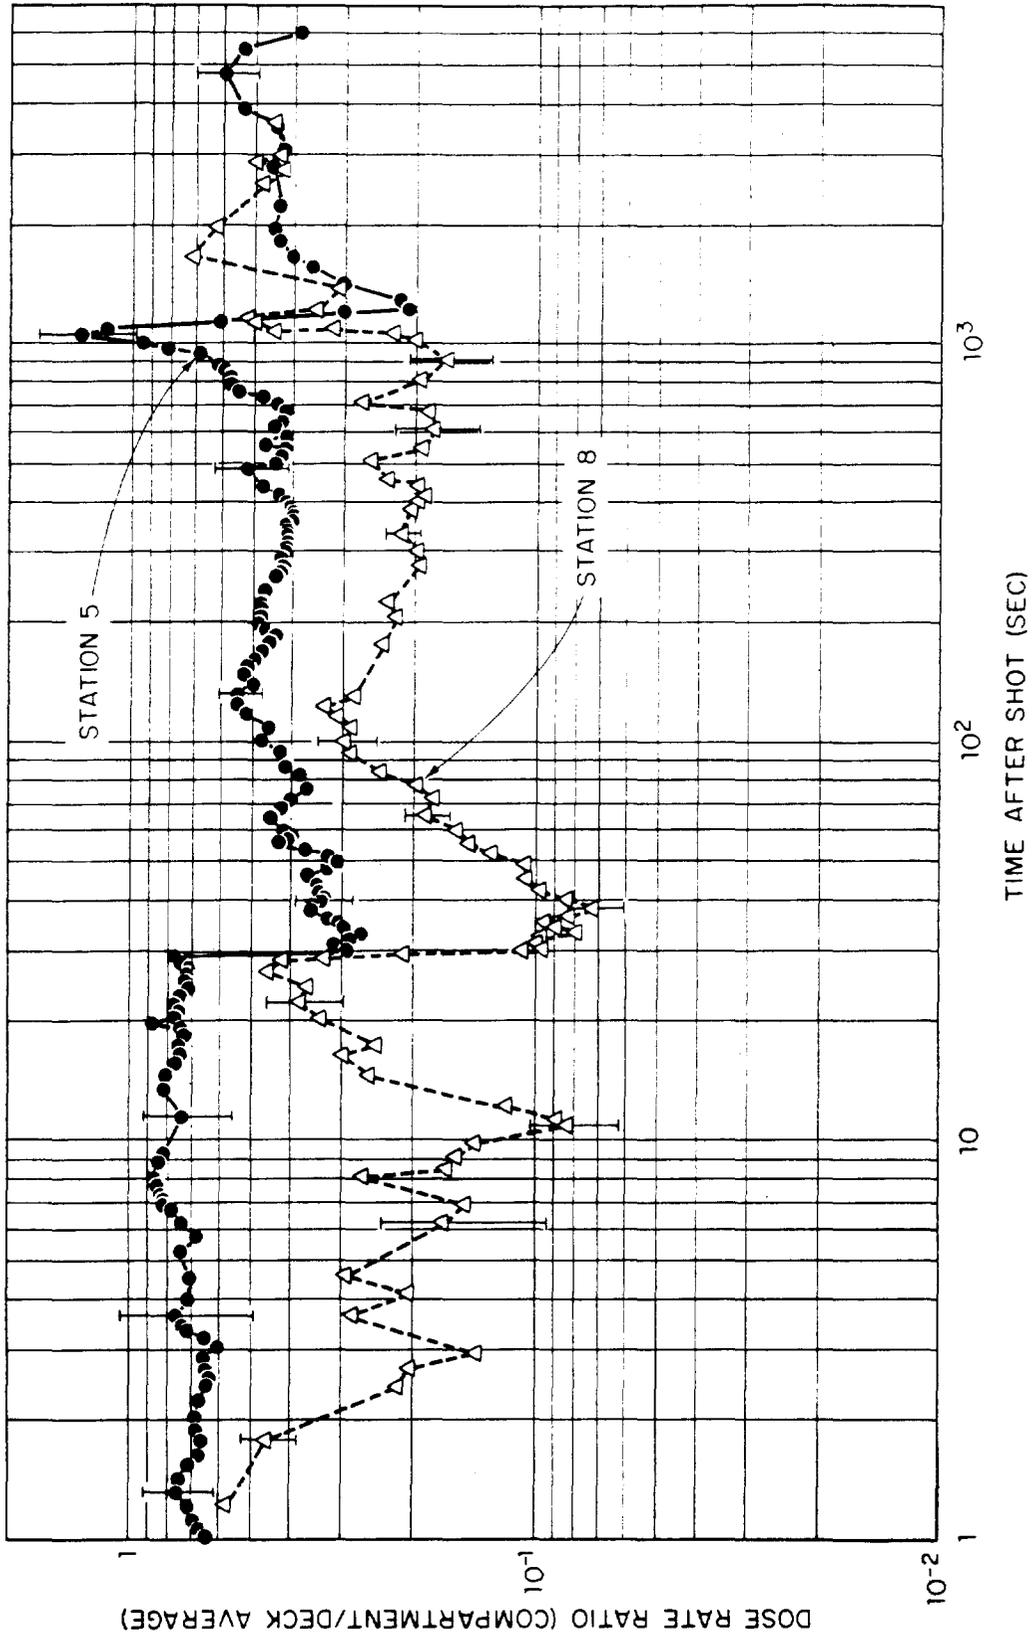


Figure 3.23 Ratios of dose rate in compartments to average dose rate on weather decks of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

decks of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

**BEST AVAILABLE COPY**

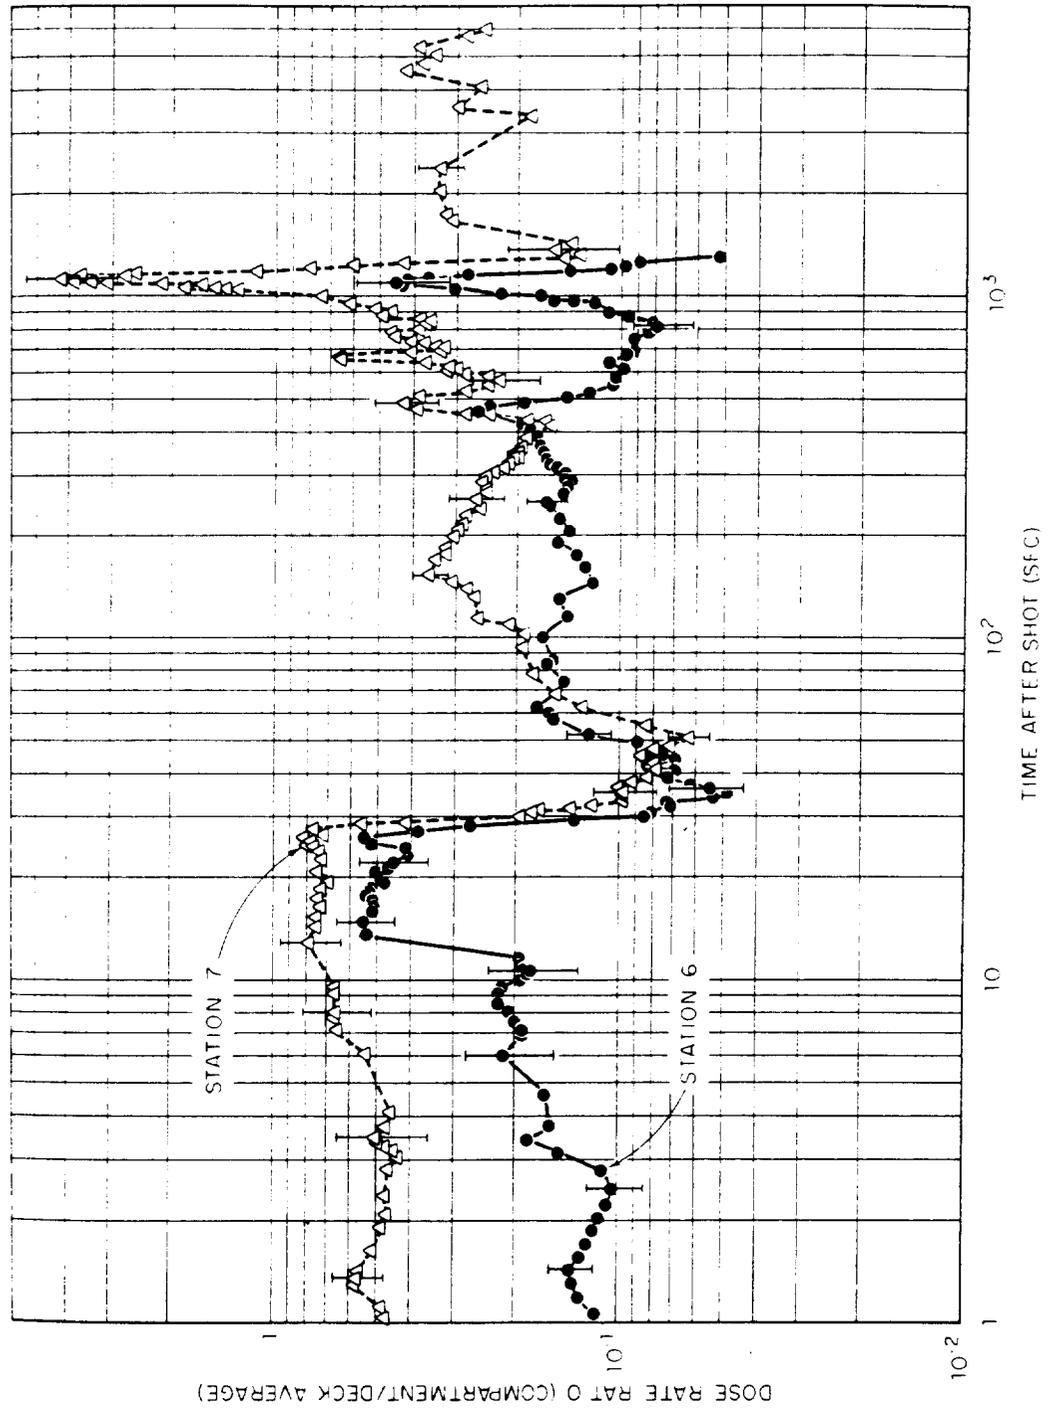


Figure 3.24 Ratios of dose rate in compartments to average dose rate on weather decks of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

**CONFIDENTIAL**

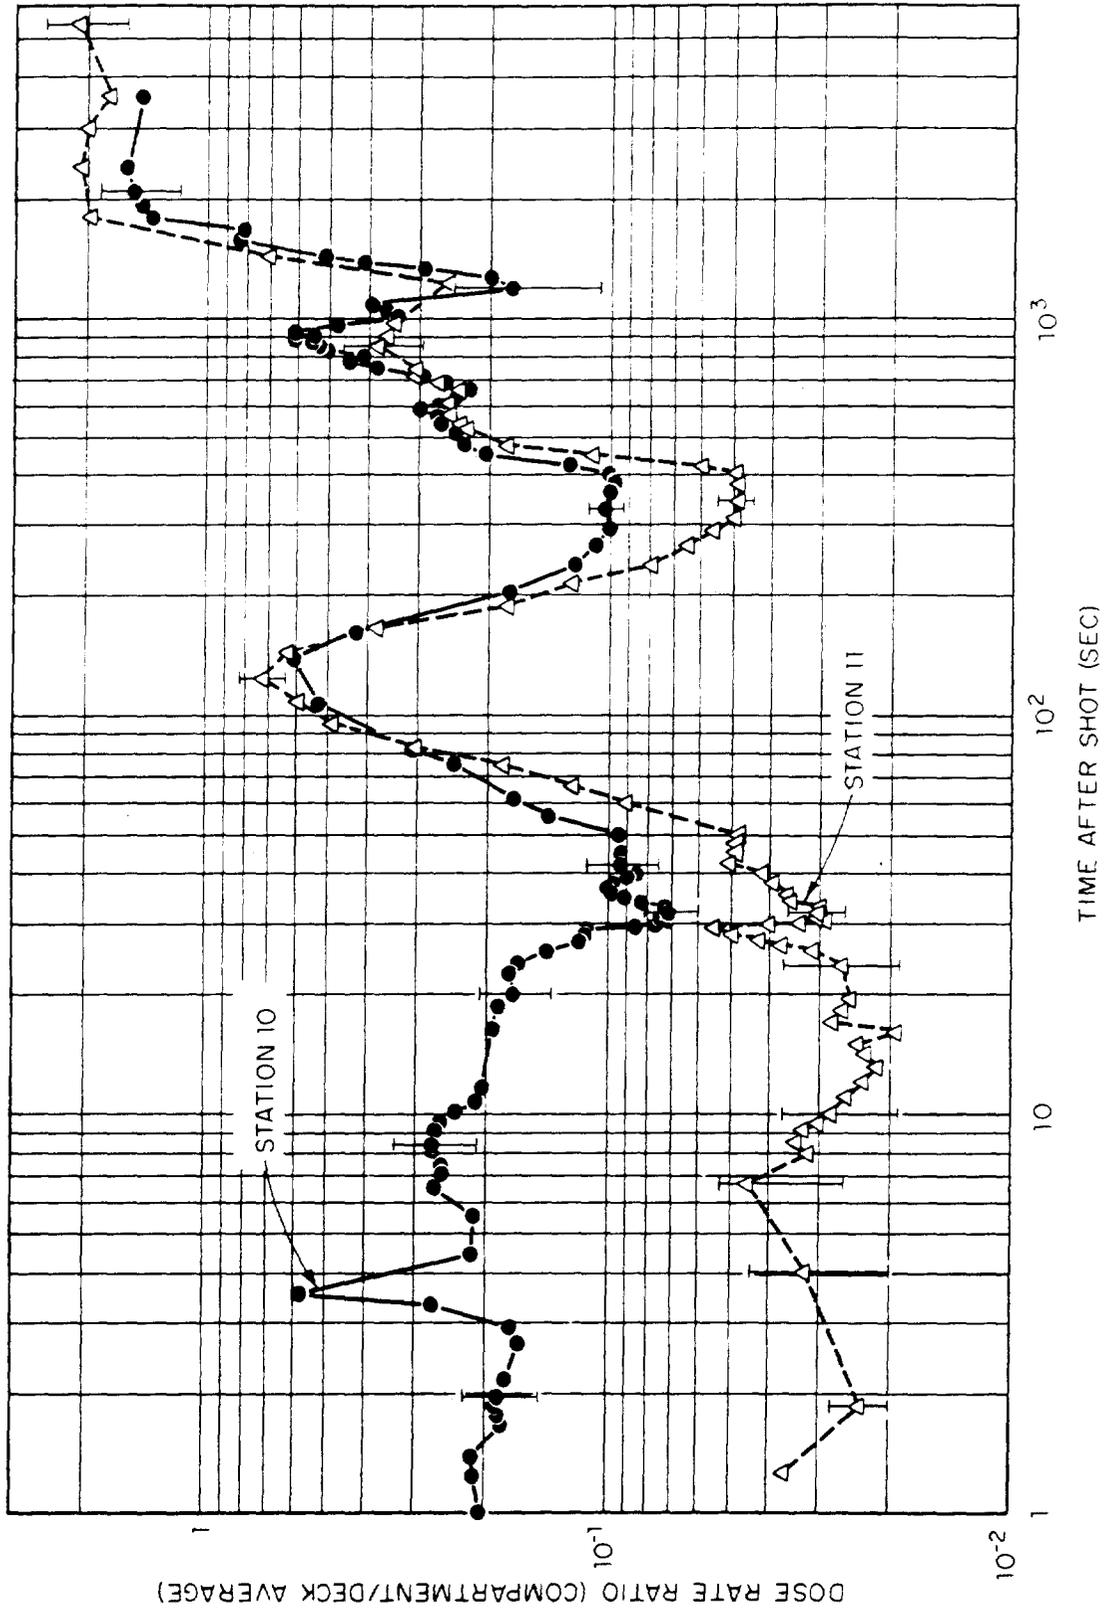


Figure 3.25 Ratios of dose rate in compartments to average dose rate on weather decks of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

**CONFIDENTIAL**

BEST AVAILABLE COPY

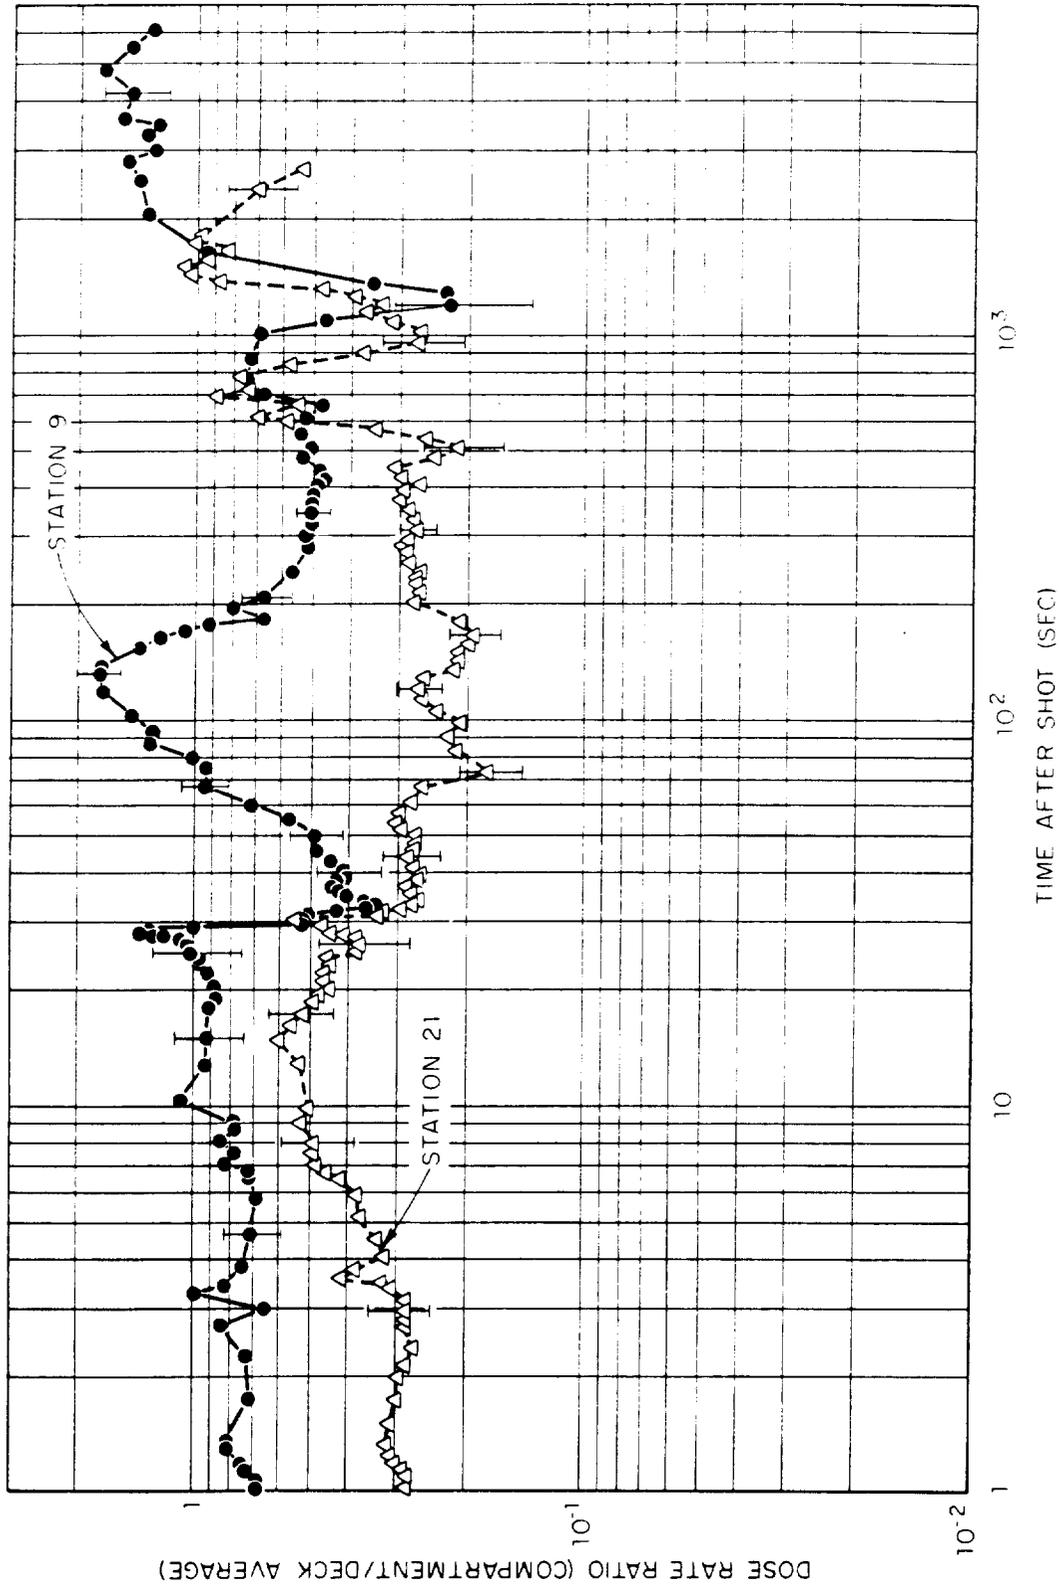


Figure 3.26 Ratios of dose rate in compartments to average dose rate on weather decks of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

CONFIDENTIAL

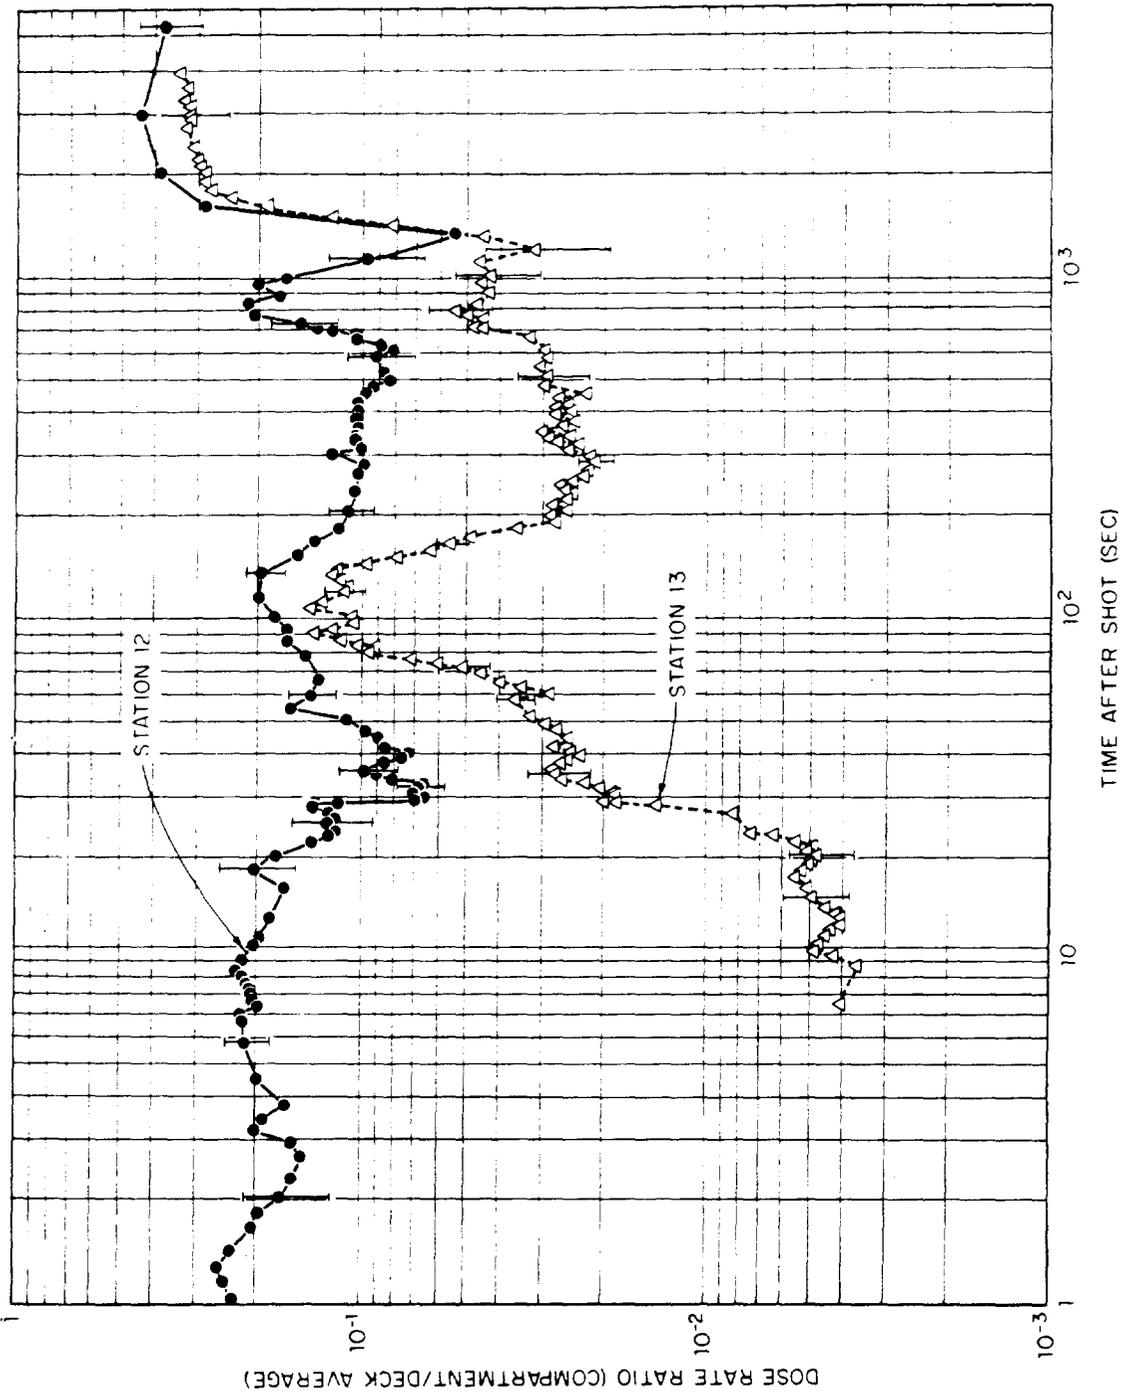


Figure 3.27 Ratios of dose rate in compartments to average dose rate on weather decks of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

BEST AVAILABLE COPY

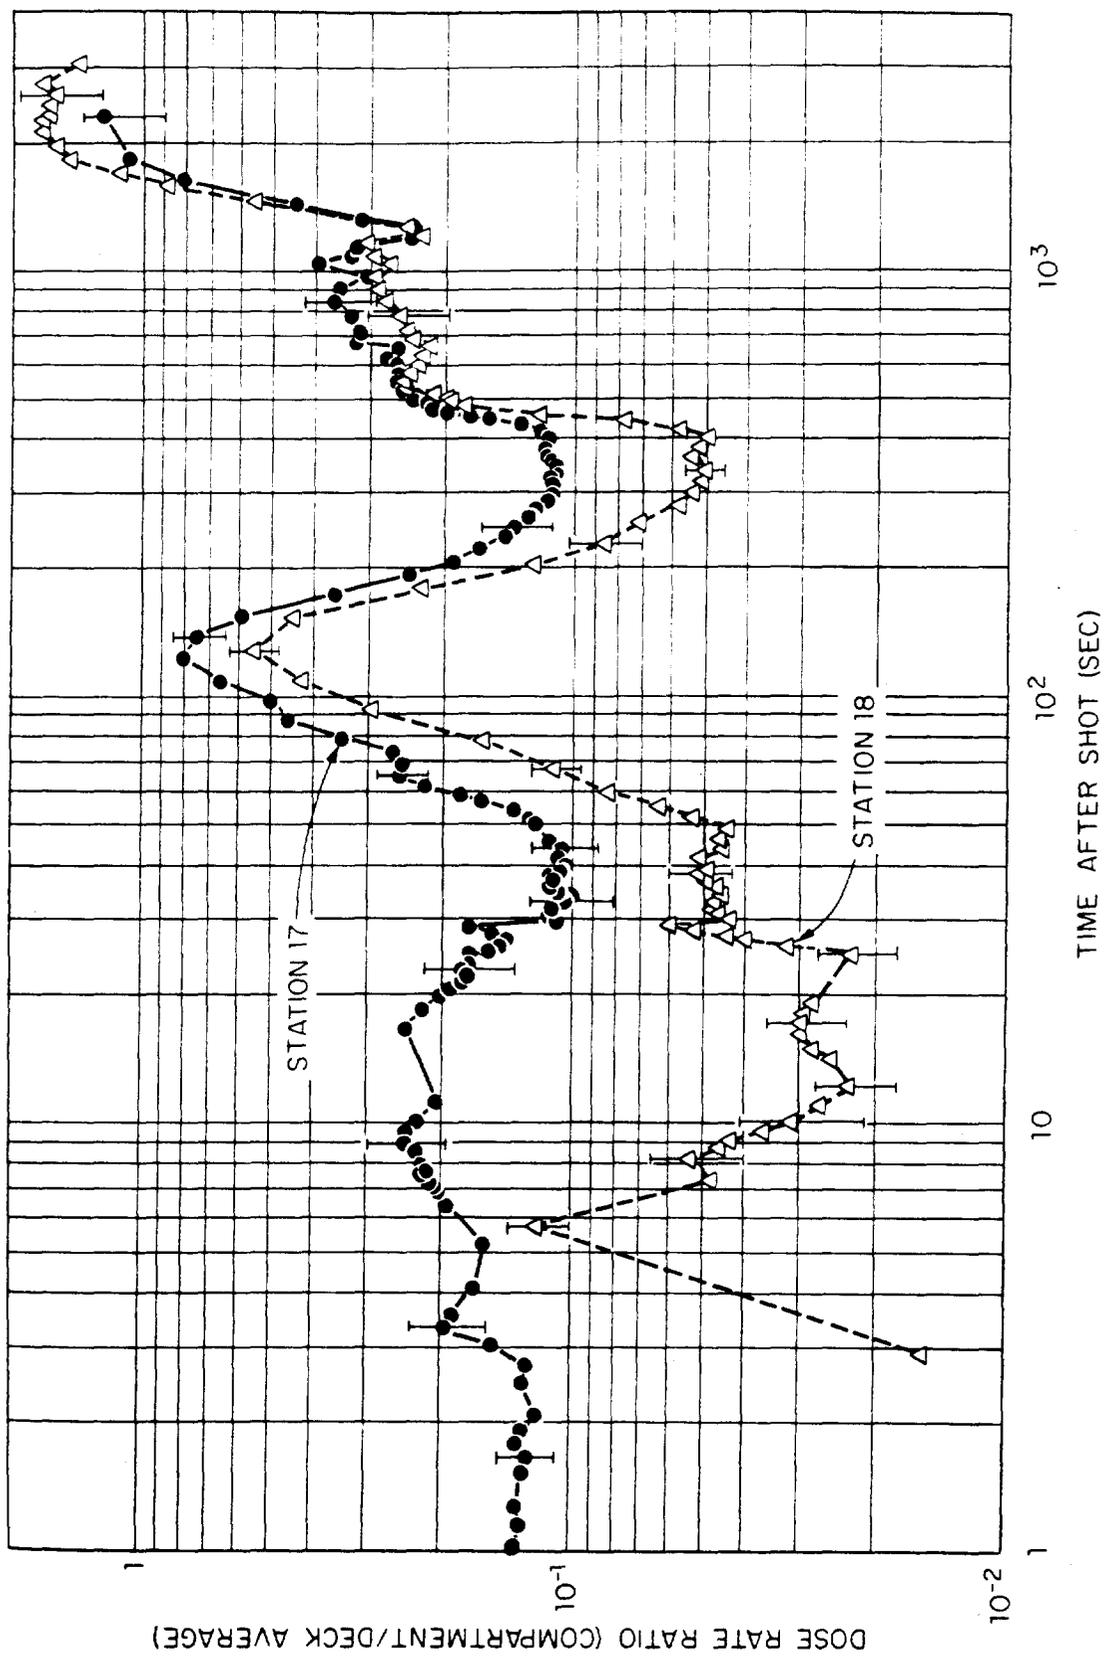


Figure 3.28 Ratios of dose rate in compartments to average dose rate on weather decks of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

CONFIDENTIAL

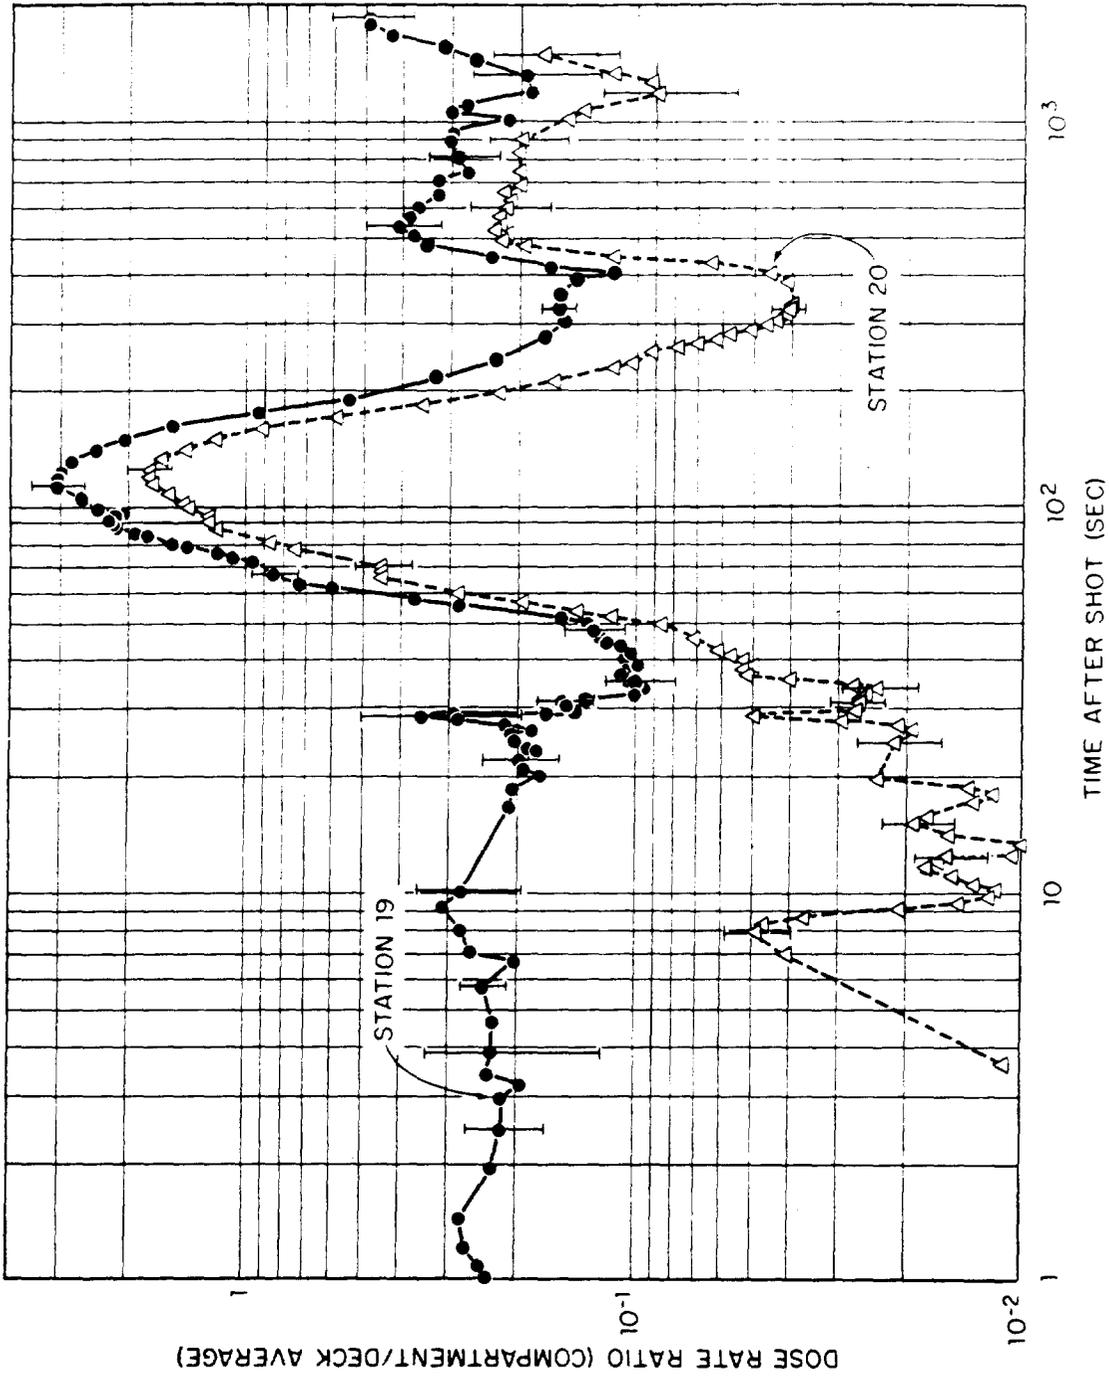


Figure 3.29 Ratios of dose rate in compartments to average dose rate on weather decks of DD 592, Shot Umbrella. Vertical bars indicate estimates of probable error.

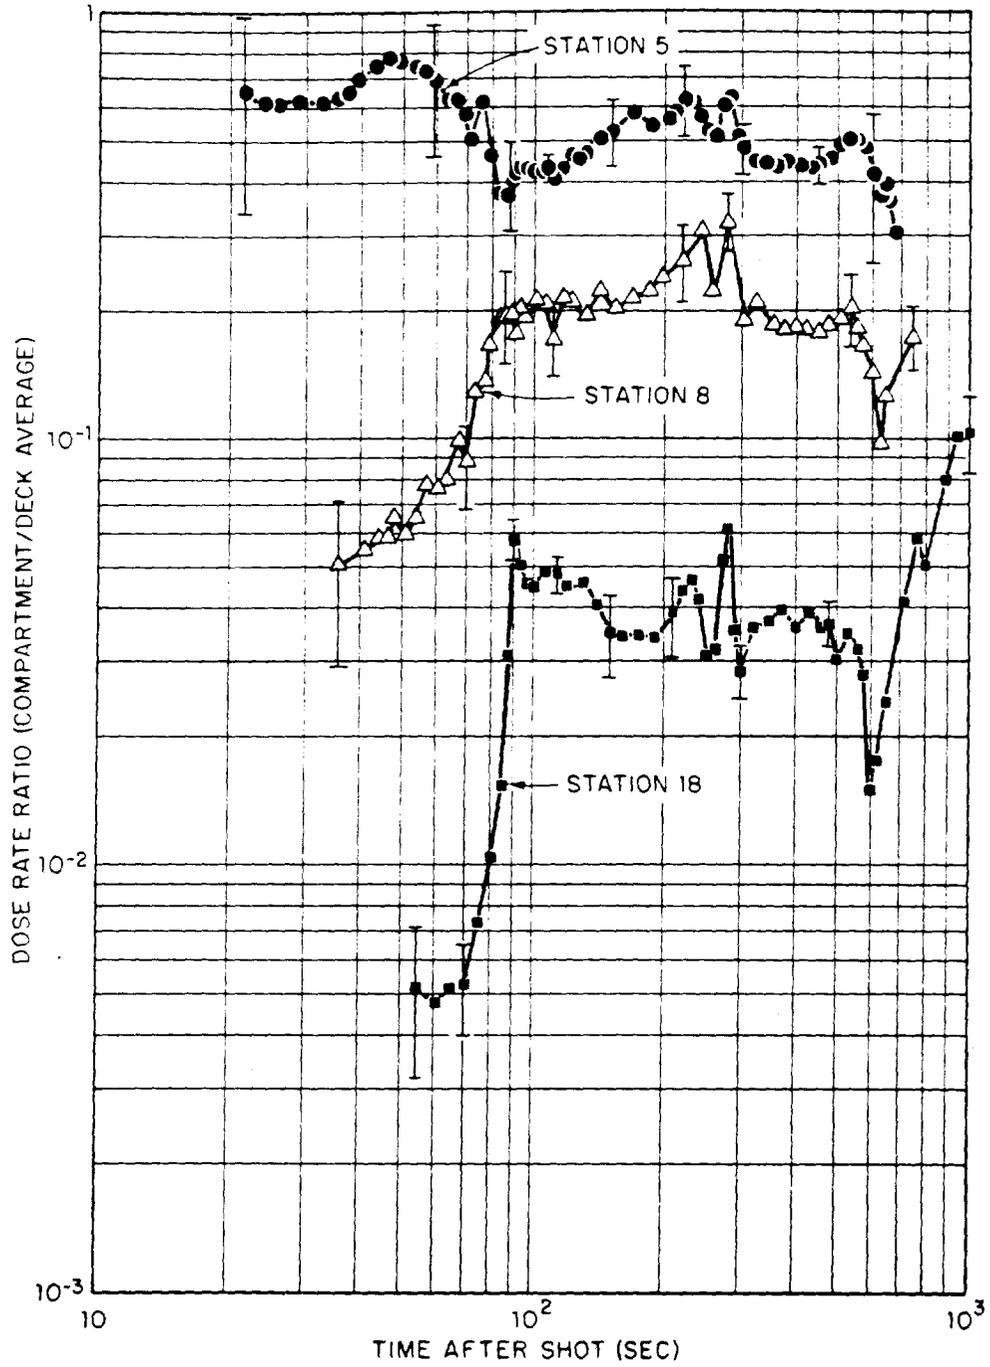


Figure 3.30 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Umbrella. Vertical bars indicate estimates of probable error.

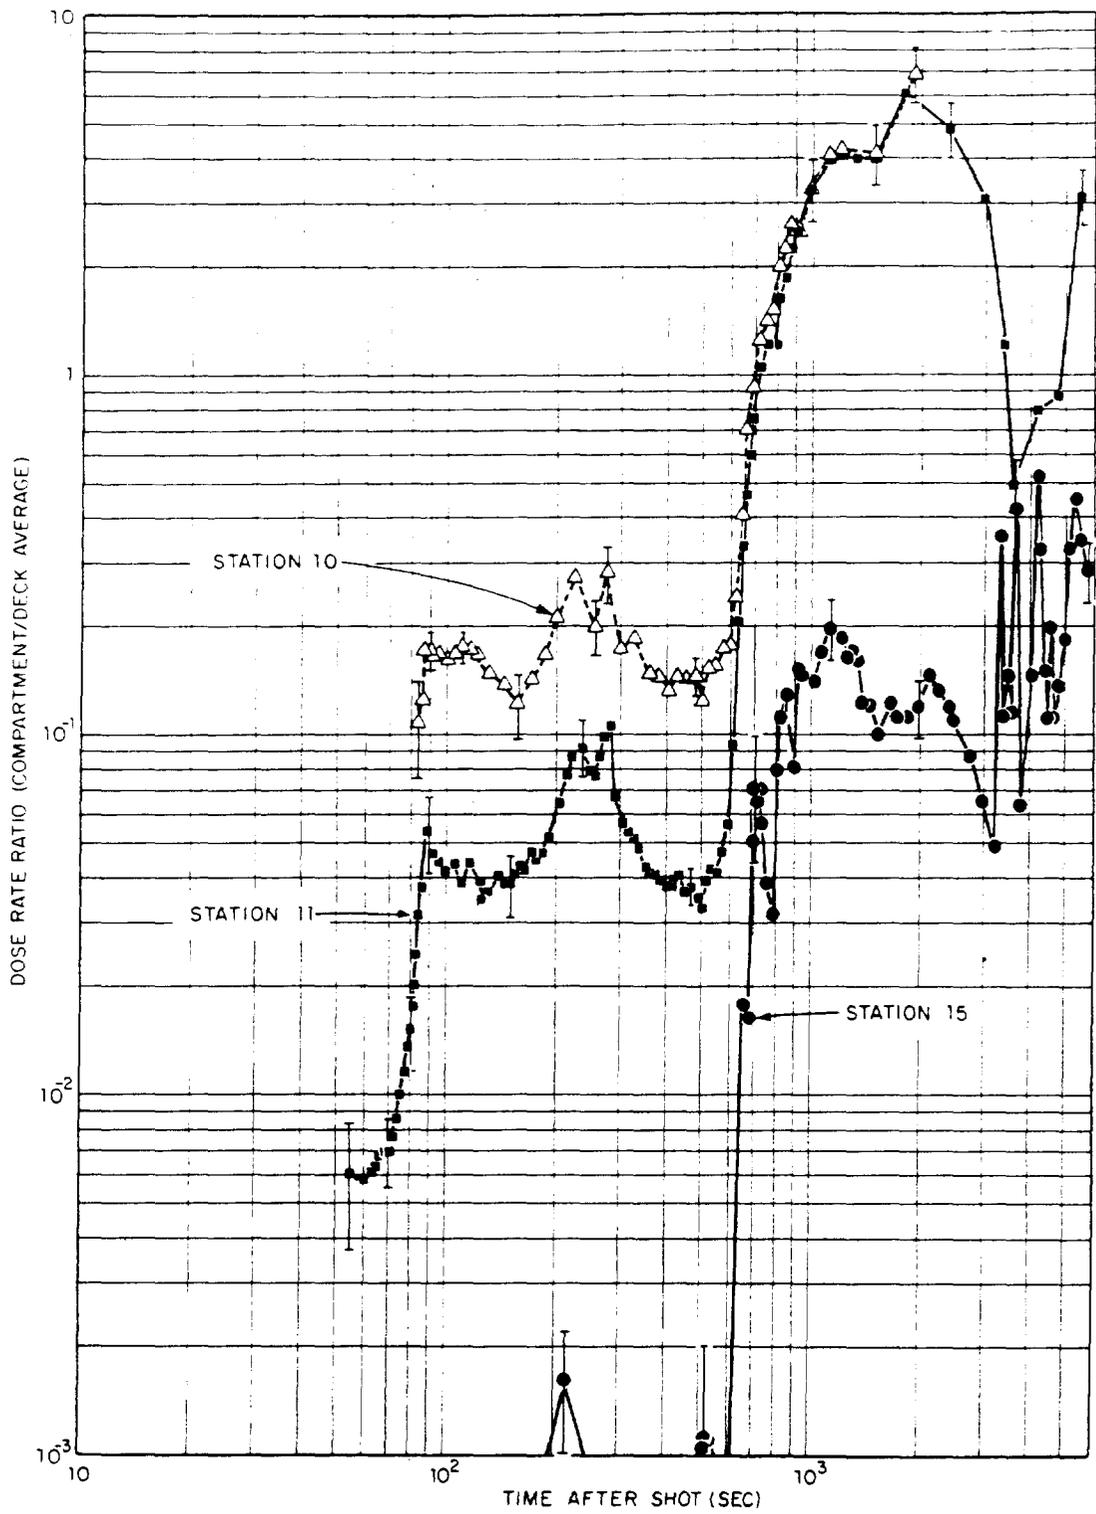


Figure 3.31 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Umbrella. Vertical bars indicate estimates of probable error.

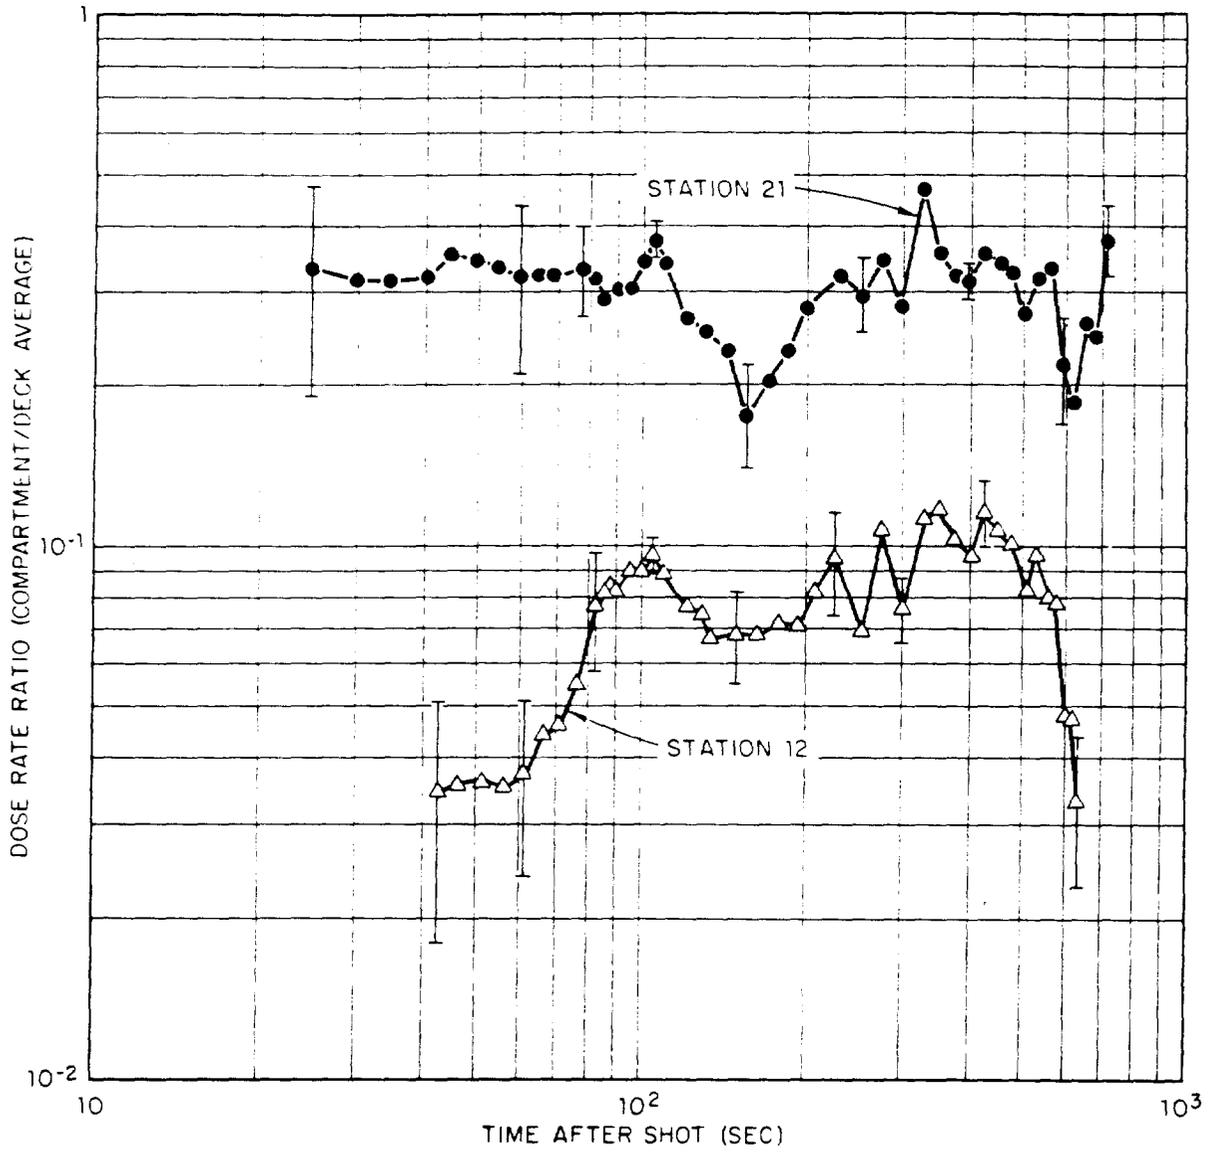


Figure 3.32 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Umbrella. Vertical bars indicate estimates of probable error.

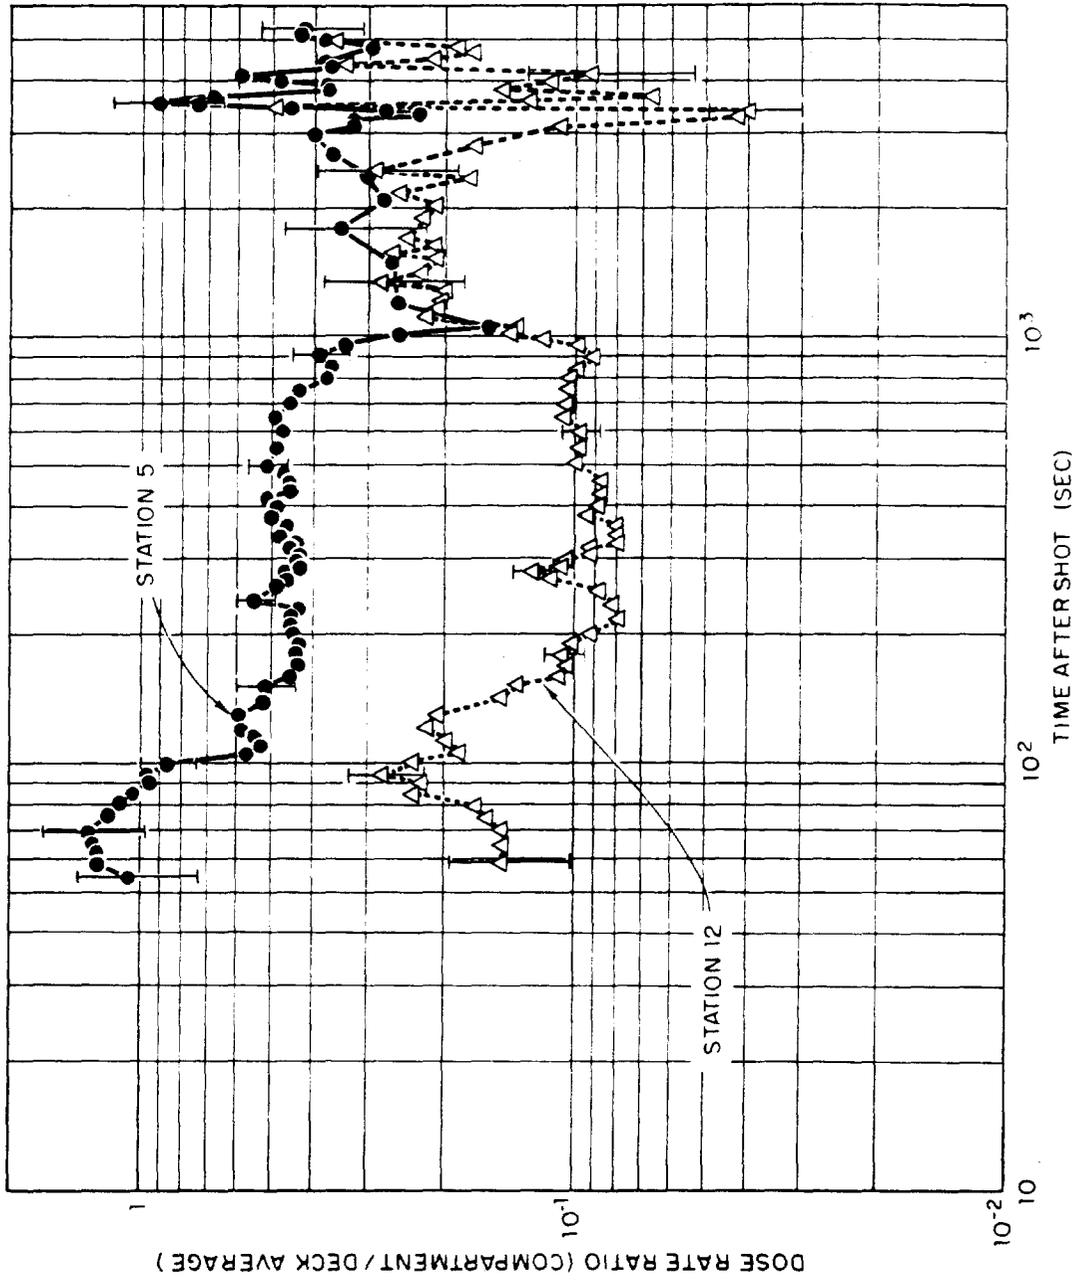


Figure 3.33 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Wahoo. Vertical bars indicate estimates of probable error.

**CONFIDENTIAL**

Figure 3.33 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Wahoo. Vertical bars indicate estimates of probable error.

**BEST AVAILABLE COPY**

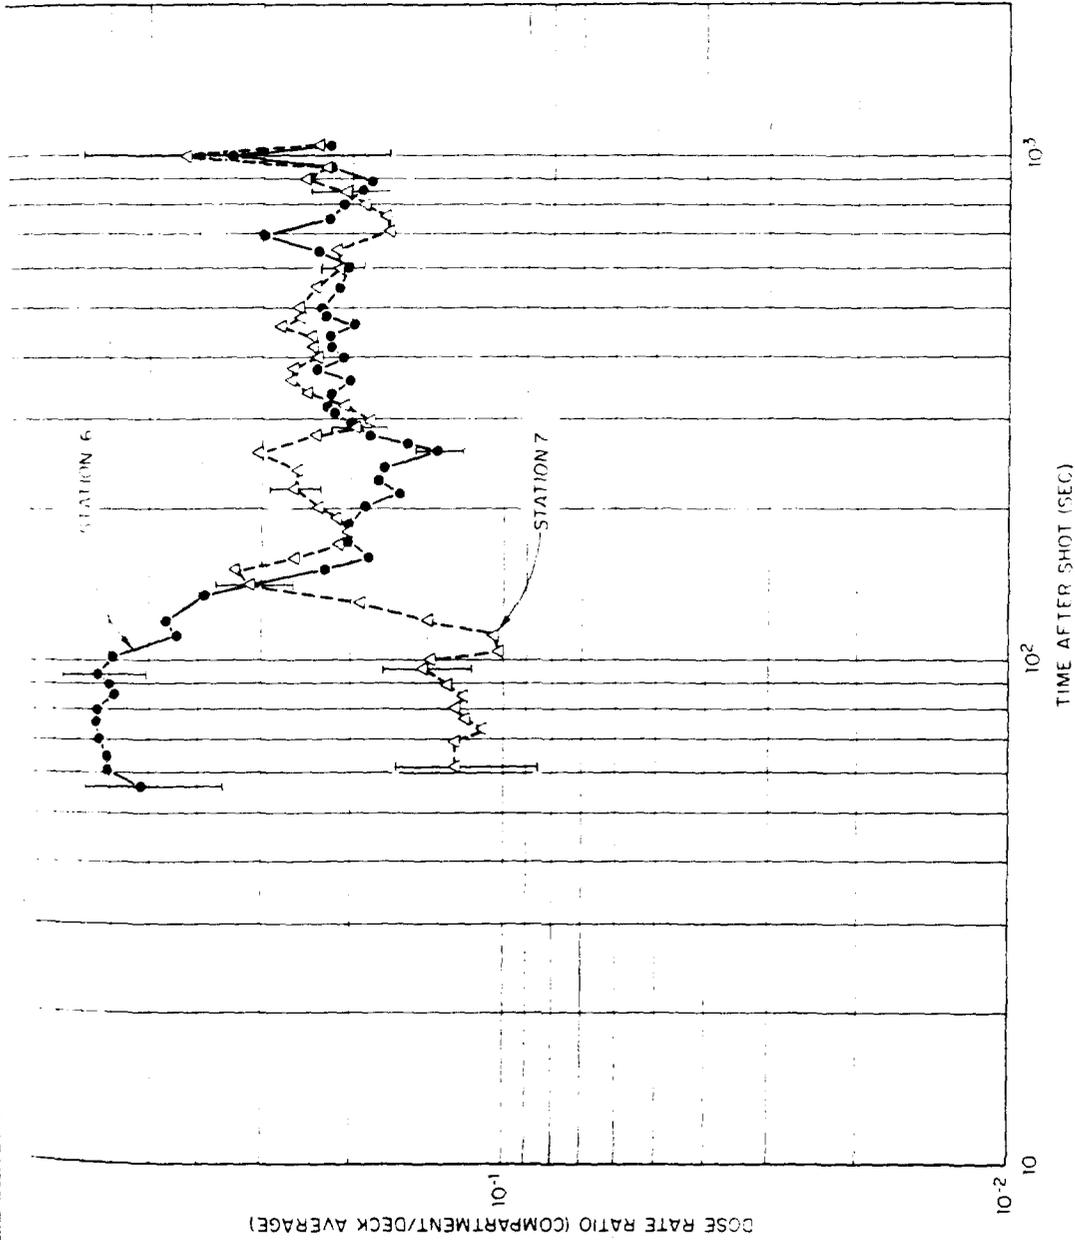


Figure 3.34 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Wahoo. Vertical bars indicate estimates of probable error.

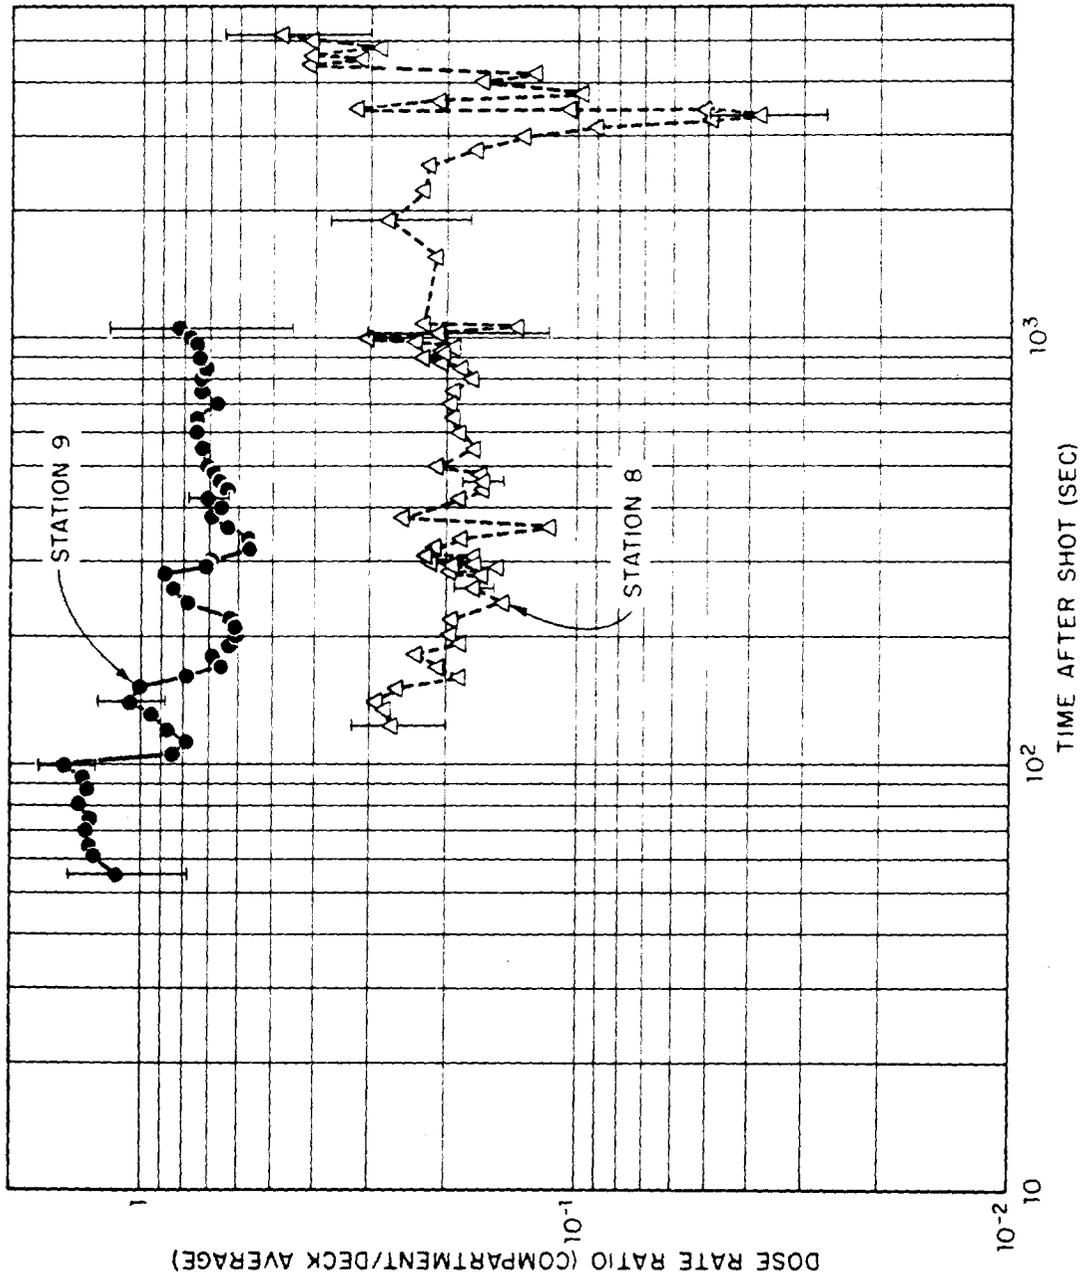


Figure 3.35 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Wahoo. Vertical bars indicate estimates of probable error.

Figure 3.35 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Wahoo. Vertical bars indicate estimates of probable error.

**BEST AVAILABLE COPY**

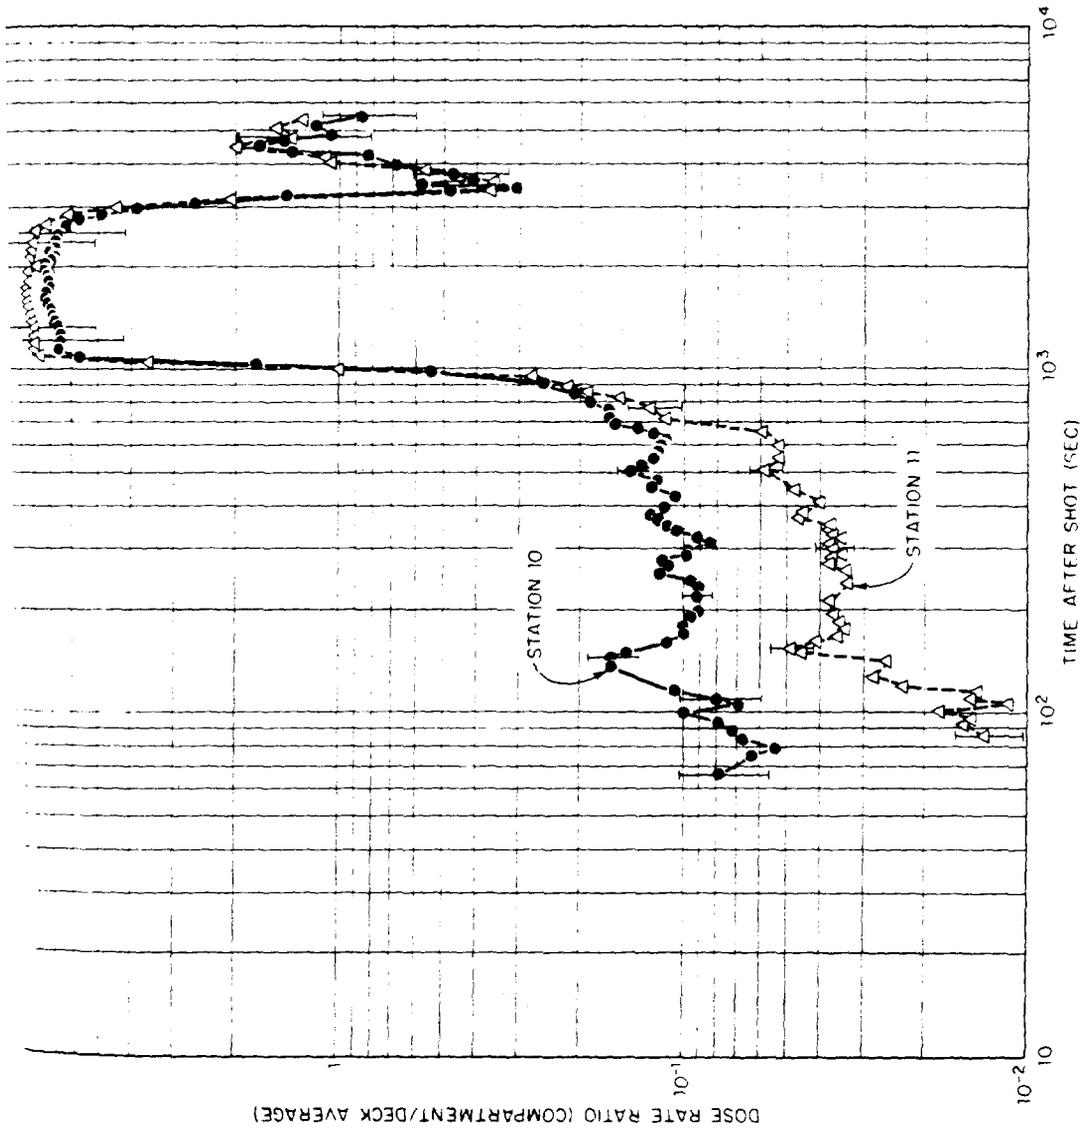


Figure 3.36 Ratios of dose rate in compartments to average dose rate on weather decks of DD 593, Shot Wahoo. Vertical bars indicate estimates of probable error.

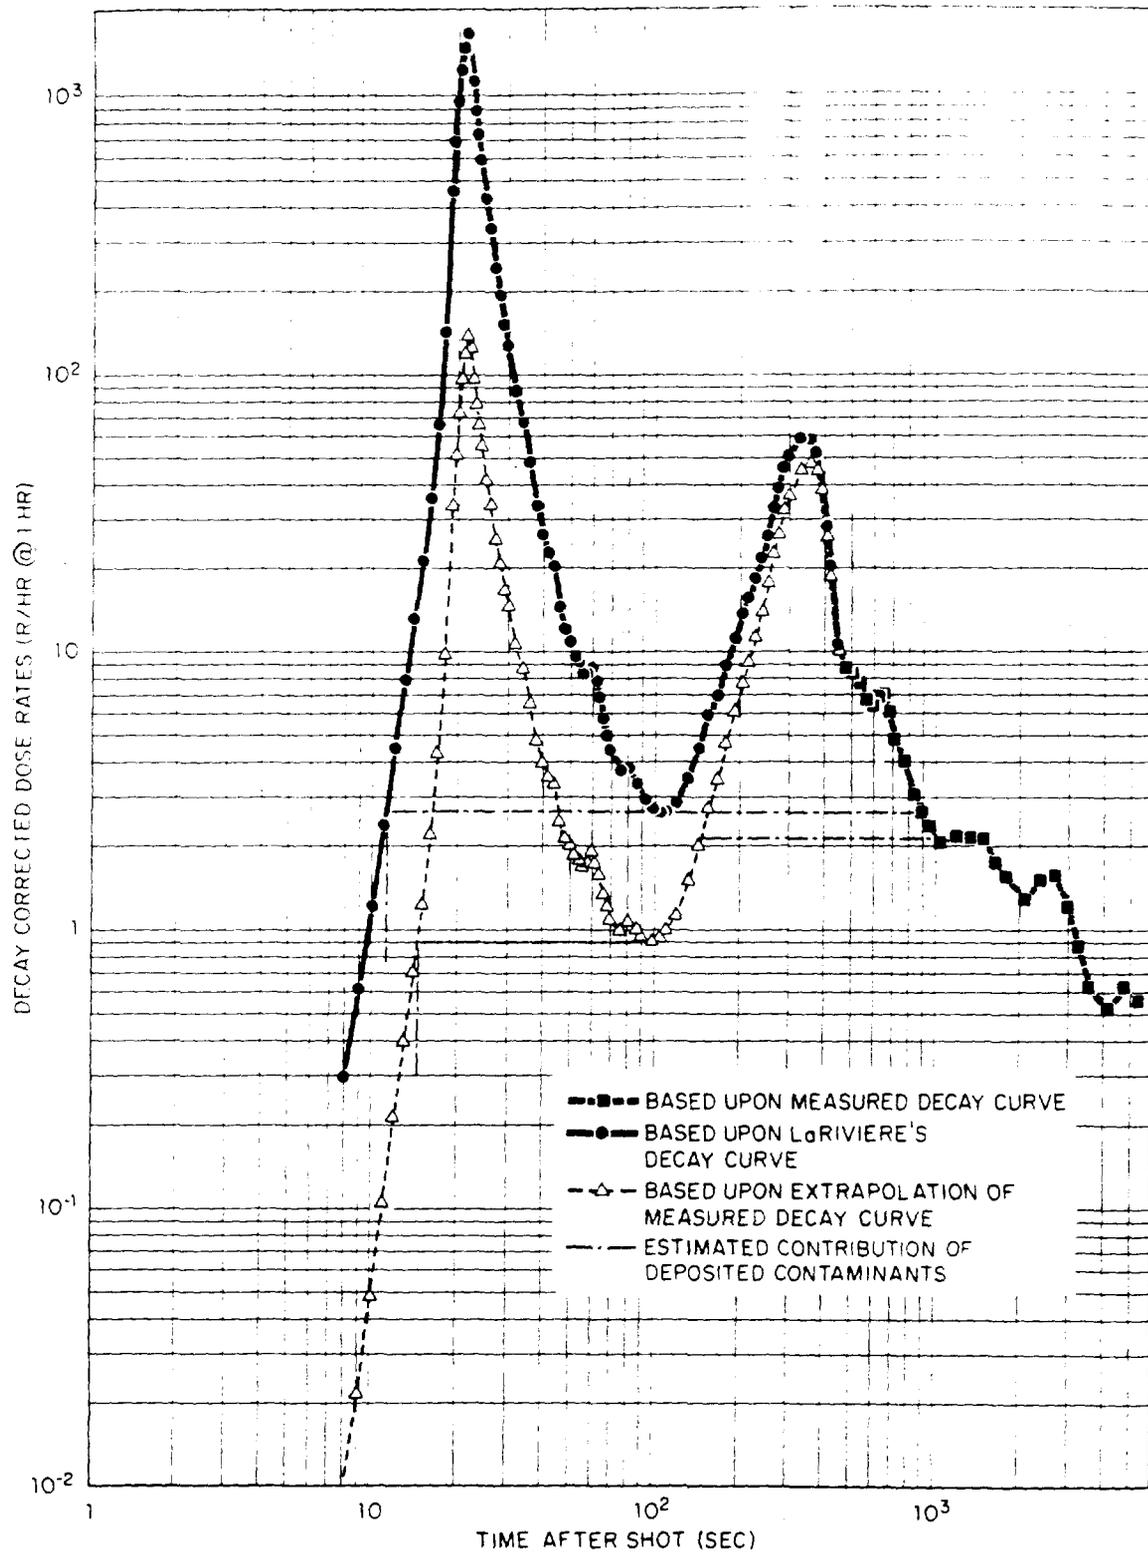


Figure 3.37 Decay-corrected average dose rates on weather decks of DD 474, Shot Umbrella.

CONFIDENTIAL

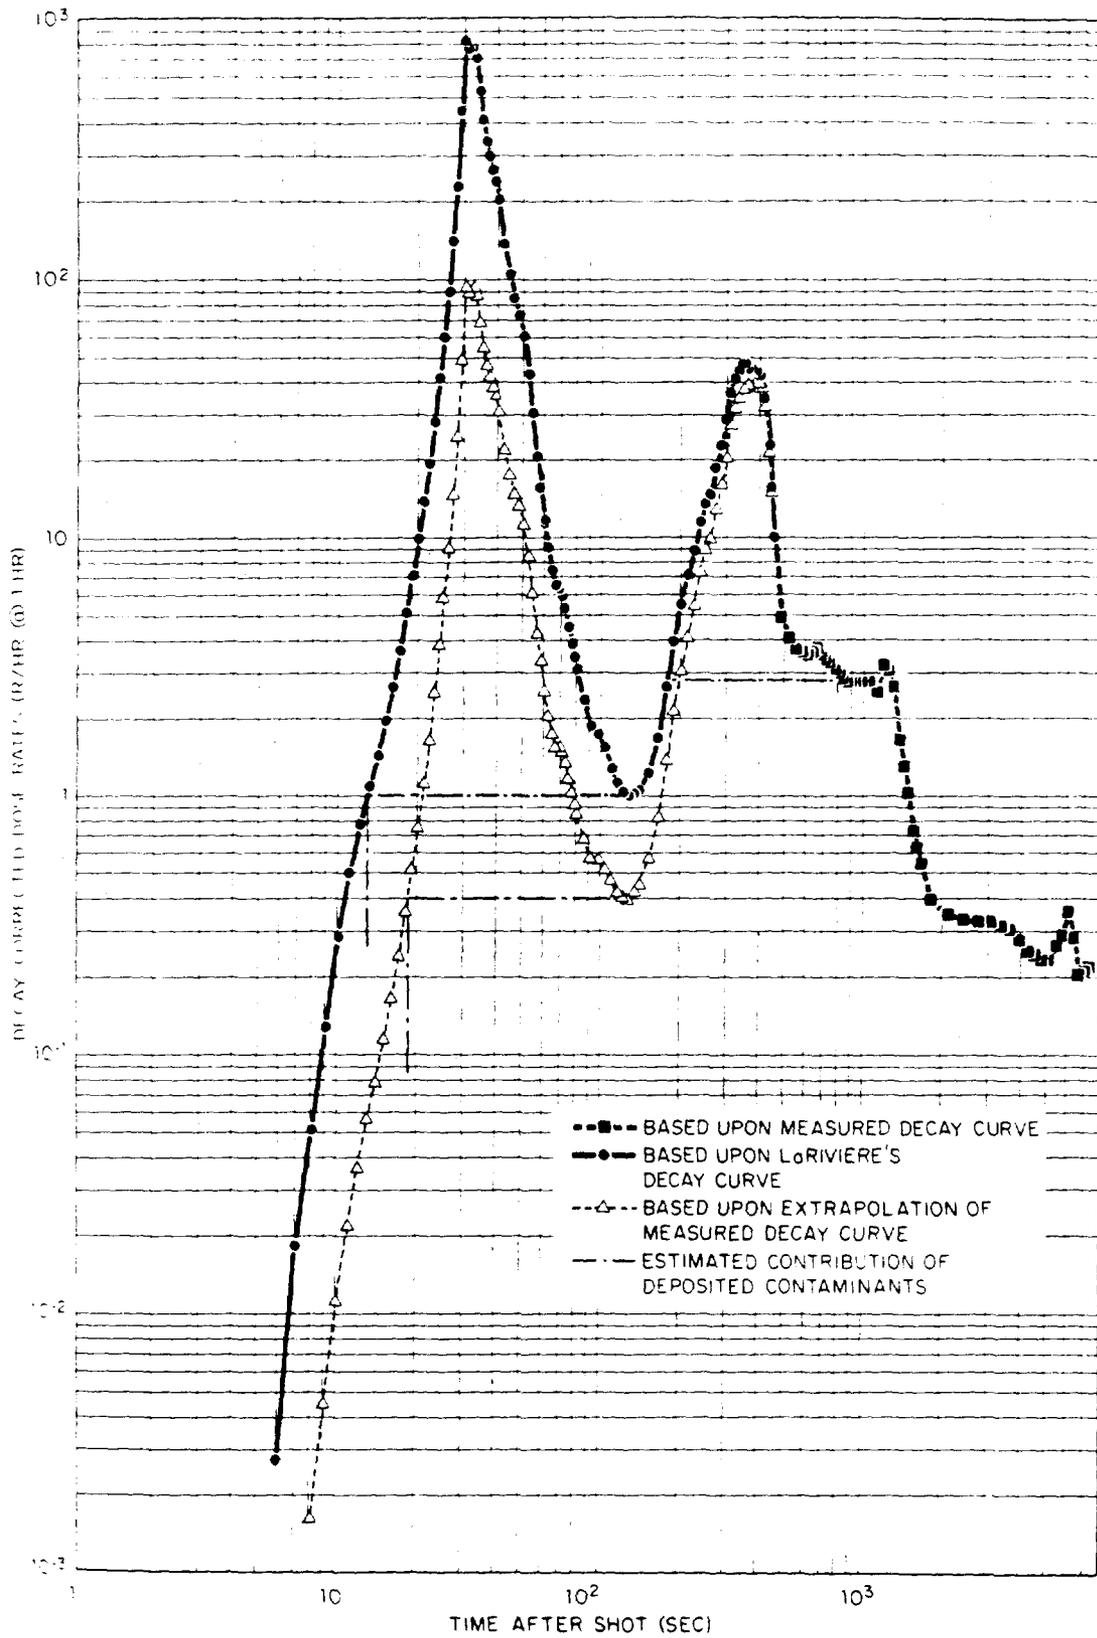


Figure 3.38 Decay-corrected average dose rates on weather decks of DD 592, Shot Umbrella.

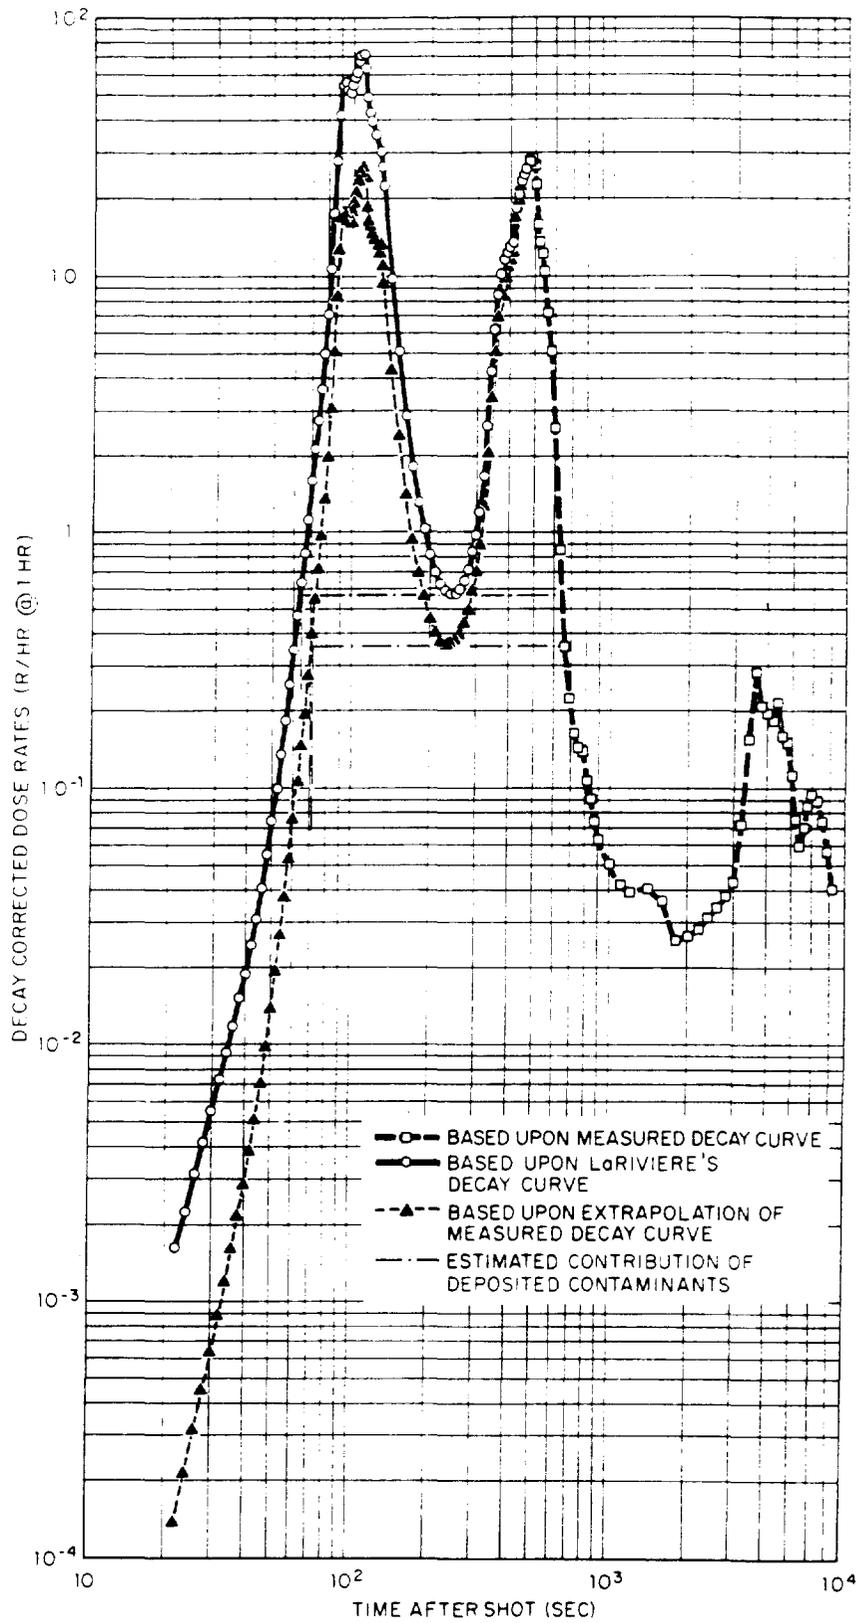


Figure 3.39 Decay-corrected average dose rates on weather decks of DD 593, Shot Umbrella.

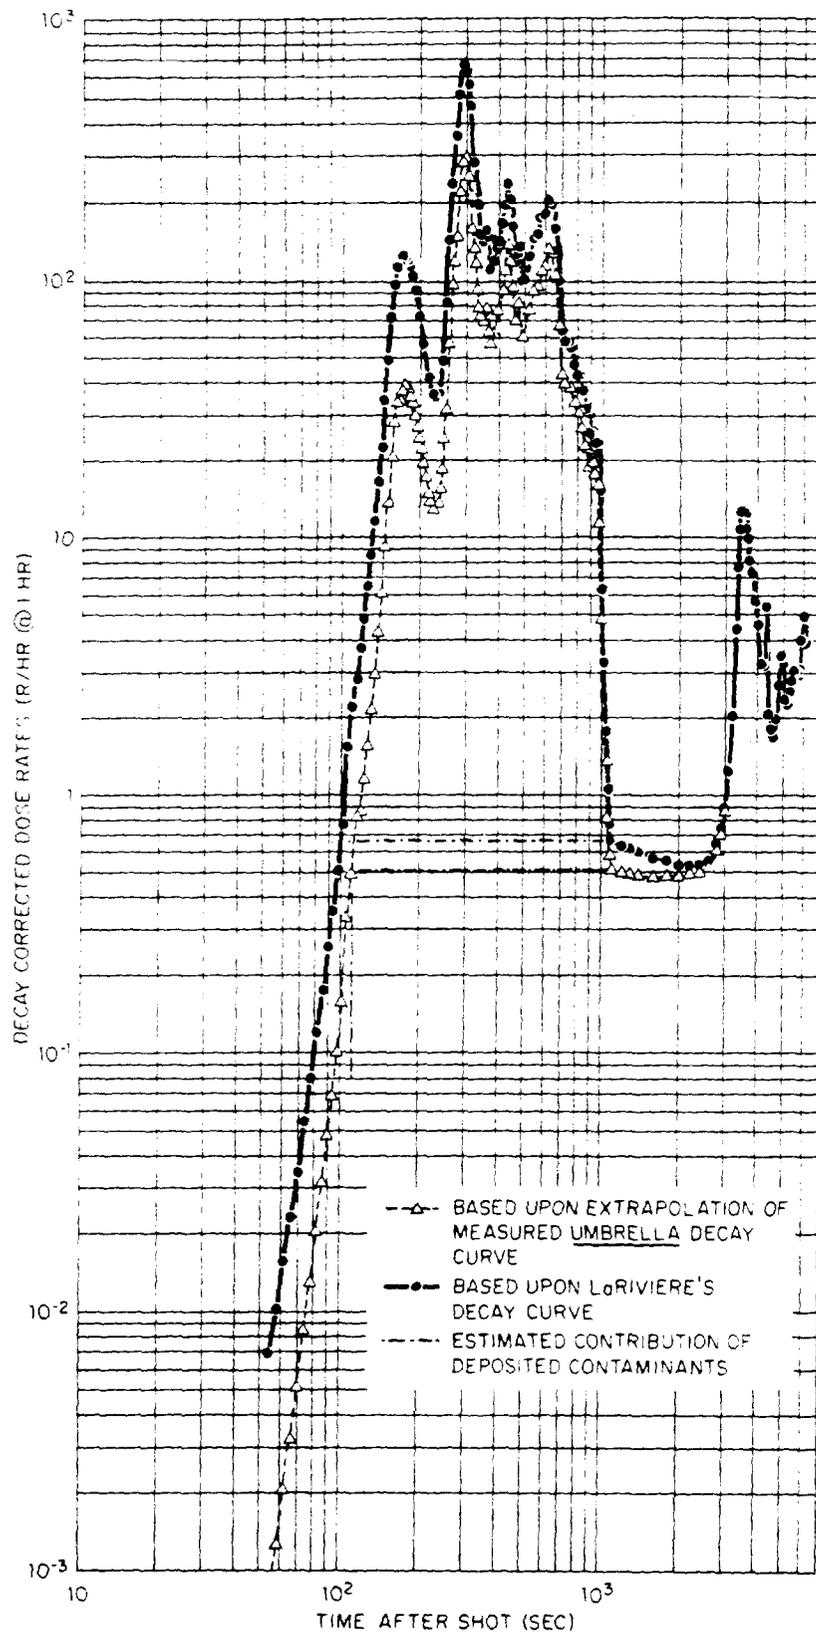


Figure 3.40 Decay-corrected average dose rates on weather decks of DD 593, Shot Wahoo.

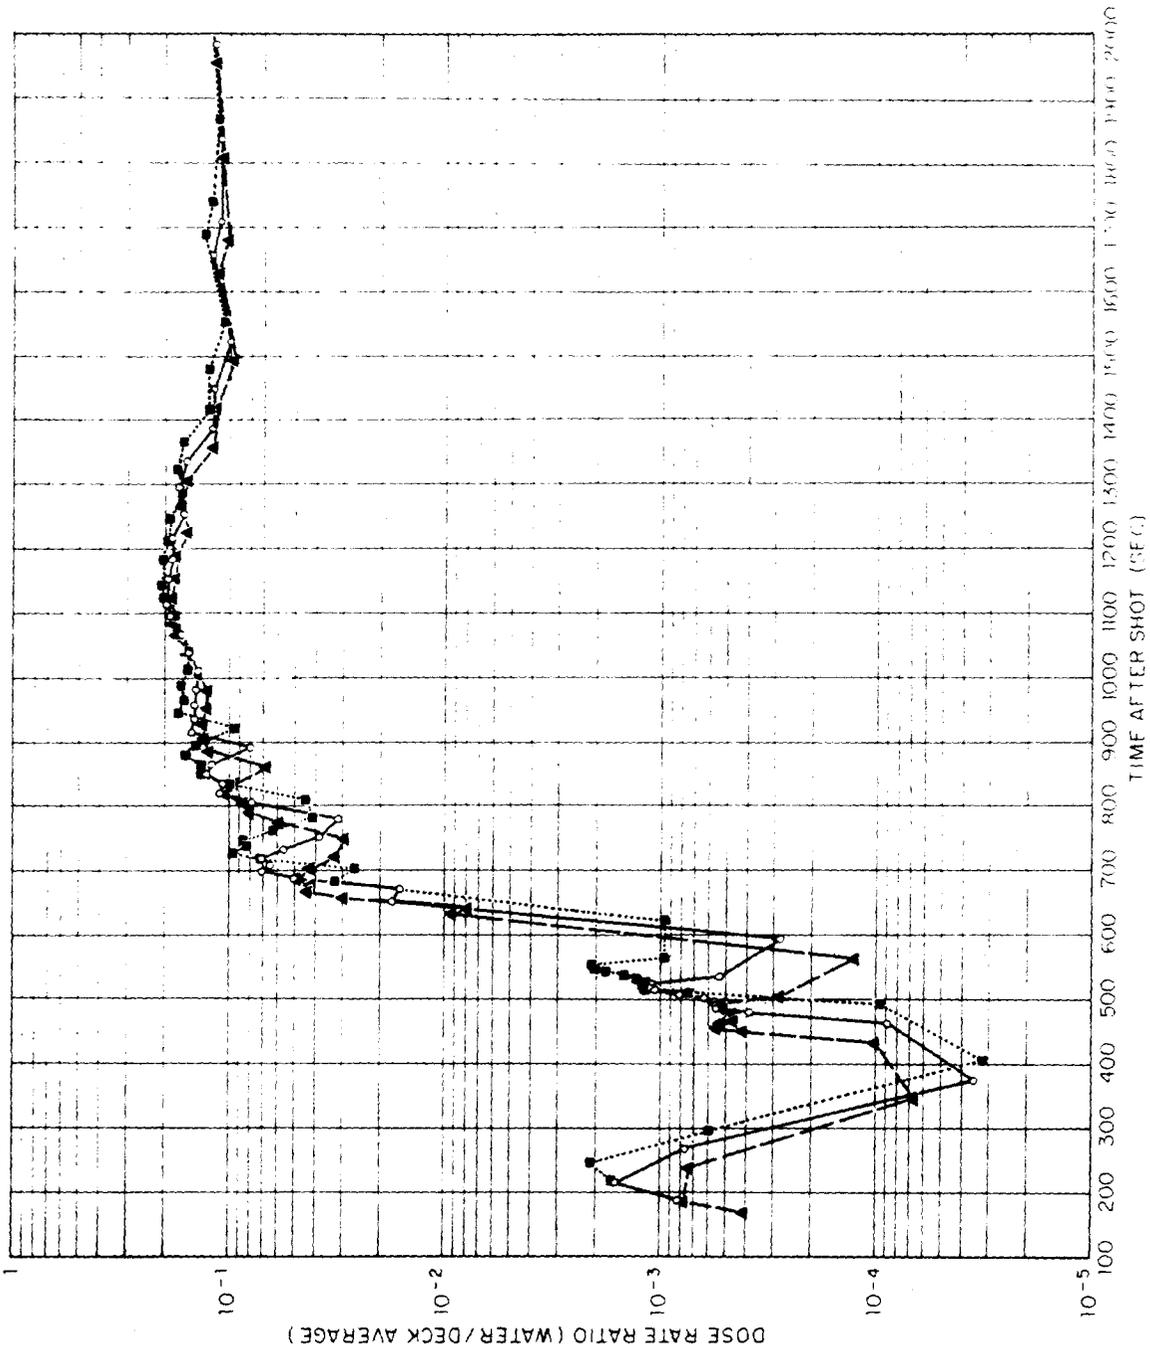


Figure 3.41 Ratios of dose rate in adjacent water to average dose rate on weather decks of DD 593, Shot Umbrella. Effects of possible 30-second timing errors are indicated by the two broken-line curves.

Figure 3.41 Ratios of dose rate in adjacent water to average dose rate on weather decks of DD 593, Shot Umbrella. Effects of possible 30-second timing errors are indicated by the two broken-line curves.

BEST AVAILABLE COPY

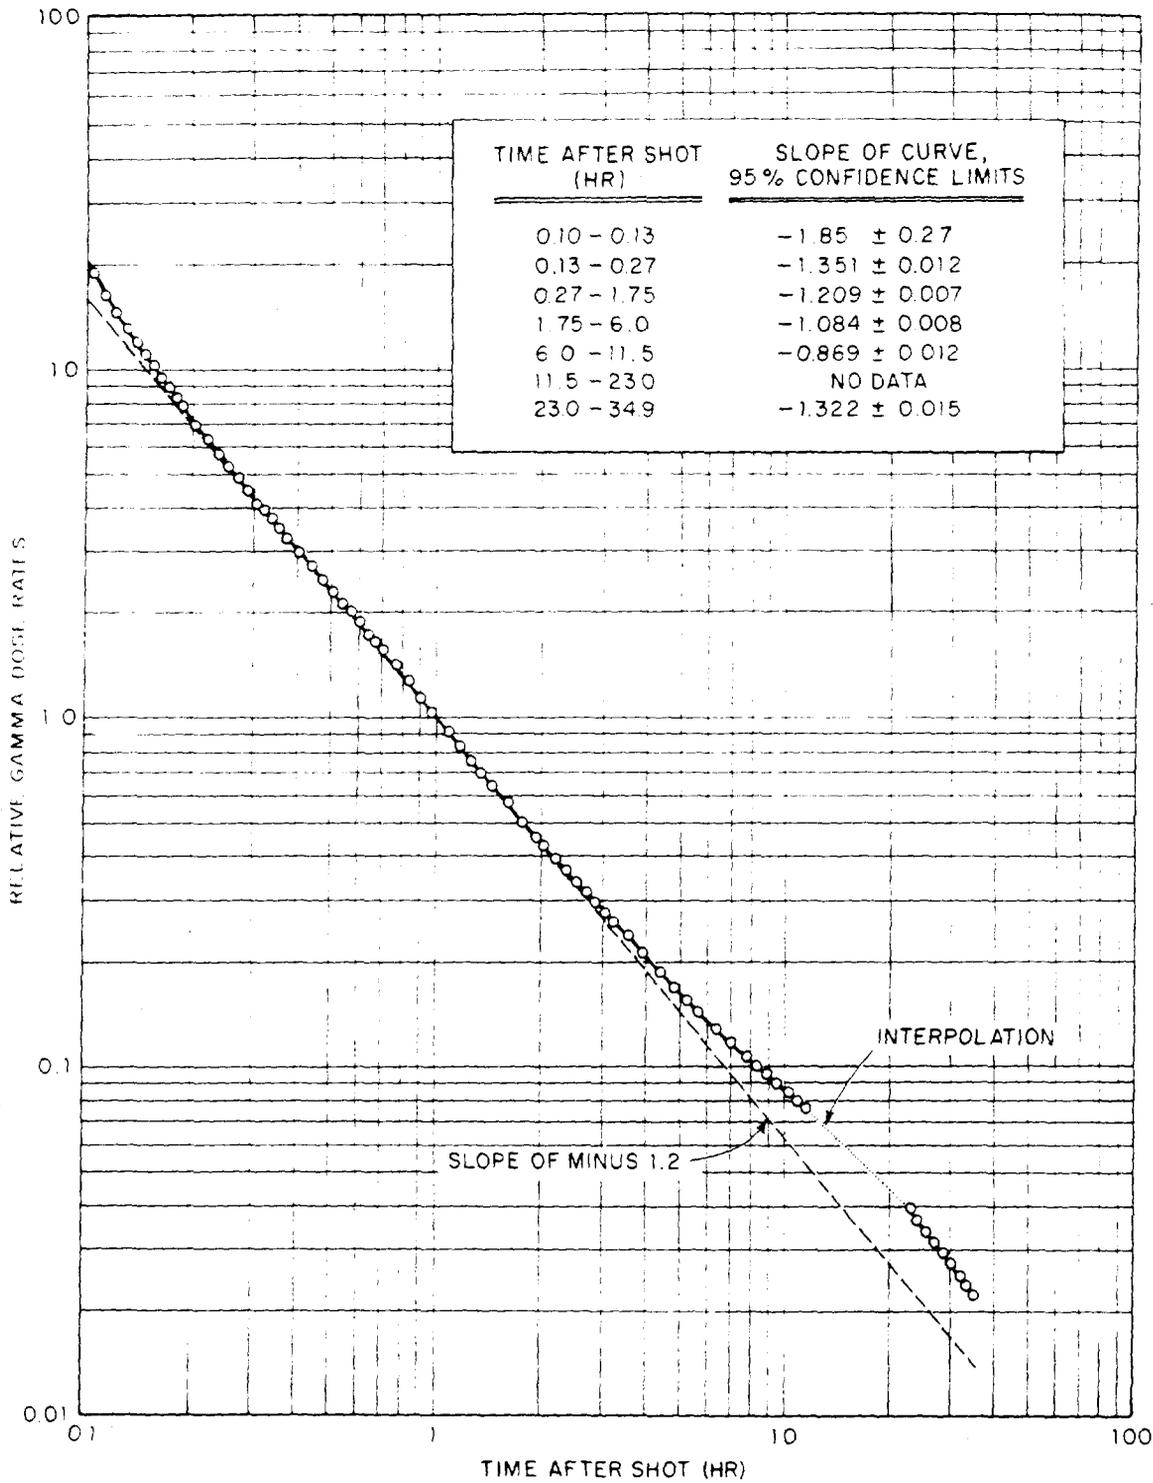


Figure 3.42 Gamma-ionization decay of contaminant collected in 6-inch-thick lead cave on DD 592, Shot Umbrella.

## Chapter 4

### CONCLUSIONS AND RECOMMENDATIONS

#### 4.1 CONCLUSIONS

The project had only limited success in meeting its objectives for Shot Wahoo, but met most of its objectives for Shot Umbrella. The conclusions are meant to apply only to the specific test conditions and radiological environments encountered aboard the moored and washed target ships.

4.1.1 Total Gamma Radiation Aboard Target Ships. The gamma radiation data indicated rapid rates of change with time after burst, and dependence upon distance from surface zero. These characteristics are summarized in Table 4.1 for the washed weather-deck areas. After Shot Wahoo, the weather-deck doses accumulated more slowly but eventually reached values on the order of 300 r higher than for Shot Umbrella, even though the ships were from 1,000 to 2,000 feet farther from surface zero.

For nuclear-weapon-delivery situations simulated by the two closer-in ships, temporary immobilization could result in lethal or near-lethal doses. After Shot Wahoo, the majority of compartments received doses in excess of 500 r aboard DD 474 and in excess of 200 r aboard DD 592. After Shot Umbrella, the two ships received doses in excess of 200 r in many compartments.

Ratios of dose or dose rate in compartments to dose or dose rate on the weather decks were dependent upon changes in radiation-source geometries and upon the presence of contaminants inside the ships. In one instance a dose-rate ratio changed by a factor of 1,000 within 28 minutes. The long-term dose ratios ranged between 0.36 and 0.63 for nonmachinery compartments on or above the main deck, between 0.14 and 0.46 for other nonmachinery compartments, between 0.08 and 0.20 for machinery spaces above the waterline, and between 0.02 and 0.07 for machinery spaces below the waterline.

4.1.2 Remote-Source Gamma Radiation. For the washed weather-deck areas, the observed total radiation can adequately represent the remote-source radiation during the first 10 minutes after the shots. At least 95 and 98 percent of the total dose on the washed decks was attributed to radiation from airborne radioactivity for Shots Umbrella and Wahoo, respectively.

On DD 474 and DD 592, a very-early radiation peak was observed between 0.5 and 6 seconds after Shot Umbrella but the dose from this effect was negligible, i. e., less than 0.13 r. No data was available to indicate whether similar very-early radiation was received after Shot Wahoo. There was apparently no correlation of dose-rate data with the size-versus-time relationship of the plume.

4.1.3 Total Gamma Radiation in Adjacent Water. Determination of underwater gamma radiation was not successful; data was obtained only for DD 593 after Shot Umbrella.

Contaminated water adjacent to the ship did not contribute significantly to the total radiation observed aboard DD 593 after Shot Umbrella. Indirect evidence suggests that, although radiation from the water may have affected the compartment/deck dose-rate ratios to a considerable degree at later times, the contribution of contaminated water to the total dose observed aboard the target ships was probably of little significance.

## 4.2 RECOMMENDATIONS

1. It is recommended that the data from all Operation Hardtack Program 2 projects be analyzed and correlated. This is required to serve as a basis for an operational analysis to determine safe standoff distance for antisubmarine warfare delivery of nuclear weapons under Operation Hardtack underwater-detonation conditions.

2. It is further recommended that additional high-explosive or nuclear detonations be studied under other detonation conditions. This is required to estimate radiological effects for other possible weapon detonation conditions.

TABLE 4.1 SUMMARY OF GAMMA RADIATION DATA FOR WASHED WEATHER DECKS

Ship	Distance from Surface Zero ft	24-Hour GITR Dose r	24-Hour Film Dose r	First Major Peak Dose Rate and Time After Shot		Time After Shot to Accumulate Dose of			
				r/hr	sec	50 r sec	200 r sec	450 r sec	600 r sec
Shot Umbrella:									
DD 474	1,900	806	—	550,000	21.5	18.9	20.7	22.6	25.3
DD 592	3,000	527	549	200,000	30.0	28.9	31.7	46.0	—
DD 593	7,900	67	66	5,200	107	148	—	—	—
Shot Wahoo:									
DD 474	2,900	—	>1,000	—	—	—	—	—	—
DD 592	4,900	—	>853	—	—	—	—	—	—
DD 593	8,900	311	421	3,200	170	240	400	—	—

~~CONFIDENTIAL~~

USNRDL  
Calif  
14.  
Teap  
Fran  
15.  
Divisi  
class  
16.  
and T  
Naval

REFERENCES

1. C. F. Ksanda and others; "Gamma Radiation from Contaminated Planes and Slabs"; USNRDL TM-27, 15 February 1955; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
2. R. W. Shnider; "Personnel Radiation Hazards Associated with Ships Immobilized by an Underwater Atomic Burst"; USNRDL-TR-5, 8 February 1954; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Secret Restricted Data.
3. G. G. Molumphy and M. M. Bigger; "Proof Testing of Atomic Weapons Ship Countermeasures"; Project 6.4, Operation Castle, WT-927, October 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Confidential Formerly Restricted Data.
4. H. R. Rinnert; "Ship-Shielding Studies"; Project 2.71, Operation Redwing, WT-1321, July 1959; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Confidential Formerly Restricted Data.
5. M. B. Hawkins and others; "Determination of Radiological Hazard to Personnel"; Project 2.4, Operation Wigwam, WT-1012, May 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Official Use Only.
6. M. M. Bigger and others; "Shipboard Contaminant Ingress from Underwater Bursts"; Project 2.2, Operation Hardtack, WT-1620, draft manuscript; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Confidential.
7. E. C. Evans and others; "Characteristics of the Radioactive Cloud from Underwater Bursts"; Project 2.3, Operation Hardtack, WT-1621, draft manuscript; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Confidential Formerly Restricted Data.
8. E. Swift, Jr. and others; "Surface Phenomena from Underwater Bursts"; Project 1.3, Operation Hardtack, ITR-1608, January 1959; U. S. Naval Ordnance Laboratory, White Oak, Silver Spring, Maryland; Confidential Formerly Restricted Data.
9. D. J. Barnes; Edgerton, Germeshausen and Grier, Inc., Boston, Massachusetts; Letter and enclosure to: R. Willey, U. S. Naval Ordnance Laboratory, White Oak, Silver Spring, Maryland; Registry Numbers 854785/854786, Subject: "Up-to-date Summary of Analysis of Wahoo and Umbrella Records," 27 May 1959; Confidential Formerly Restricted Data.
10. P. D. LaRiviere; "Early-Time Gamma Ray Properties of  $U^{235}$  Gross Fission Products"; USNRDL TM-89, 9 July 1958; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
11. H. Goldstein and J. E. Wilkins, Jr.; "Calculations of the Penetration of Gamma Rays"; NYO-3075, 30 June 1954; Nuclear Development Associates, Inc., White Plains, New York; Unclassified.
12. A. T. Nelms and J. W. Cooper; " $U^{235}$  Fission Product Decay Spectra at Various Times After Fission"; NBS-5853, 11 April 1958; National Bureau of Standards, Washington, D. C.; Unclassified.
13. E. Laumets and C. F. Ksanda; "Technique for Estimating Gamma Dose Rate Spectra from Field Attenuation Measurements and Comparison of Results for Operation Castle";

USNRDL TR-308, 7 April 1959; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Secret Restricted Data.

14. L. A. Webb and others; "Analysis of Gamma Radiation from Fallout from Operation Teapot"; USNRDL TR-106, 27 August 1956; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Confidential Restricted Data.

15. "Reactor Shielding Design Manual"; TID-7004, March 1956; Naval Reactors Branch, Division of Reactor Development, U. S. Atomic Energy Commission, Washington, D. C. ; Unclassified.

16. R. Golden and E. Tochilin; "Characteristic Curves from Different Ionizing Radiations and Their Significance in Photographic Dosimetry"; USNRDL-TR-248, 23 June 1958; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.

ran-  
by an  
Defense

rmeas-  
Defense

21,  
on-

Project  
ry,

s";  
De-

r  
o-  
ted Data.

1.3,  
ak,

letter  
,  
of

ucts";  
o 24,

ys";  
k;

nes  
;

ra

~~CONFIDENTIAL~~

## Appendix A

### GITR INSTRUMENT

Instruments to record gamma radiation as a function of time had been developed and used during previous field operations (References 3 and 4). However, this earlier instrumentation was entirely unsuitable for use during Operation Hardtack, wherein high time resolution, wide radiation-intensity ranges, improved detector geometry, simplified and unattended operation, rugged watertight performance, and improved capability for data reduction were required. These requirements were the basis for the development of the GITR Model 103 (Figures A.1 and A.2).

The instrument developed was a dose-increment recorder consisting of: (1) two concentric ionization chambers with recycling electrometers, (2) magnetic-tape recorder, (3) mechanical timer, and (4) control circuit and battery power supply (Figure A.3). These components were packaged in a watertight aluminum case 21 by 16 by 13 inches in size and had an overall weight of 55 pounds. The externally mounted detector unit was connected to the main instrument assembly by means of a watertight cable. Optionally, the detector could be plugged into the main instrument assembly within the case itself.

#### A.1 DETECTOR UNIT

The detector consisted of a low-range ionization chamber constructed around a high-range ionization chamber, with each chamber connected to a recycling electrometer circuit (Figure A.4). The recycling electrometer consisted of a CK 5886 electrometer tube connected as a cathode-coupled blocking oscillator with the interelectrode capacity of the ionization chamber in the first grid. Initially, the ionization chamber was charged, and the voltage on the first grid was below the predetermined triggering level of the electrometer. Ionizing radiation discharged the chamber and caused a positive voltage shift on the first grid. When a predetermined voltage level was reached, the circuit was triggered and generated a pulse of fixed amplitude at the cathode. The pulse caused the first grid to conduct and to transfer a constant, predetermined charge to the chamber. Simultaneously, the pulse was recorded on magnetic tape. The pulse terminated at the cathode in approximately 500  $\mu$ sec, and the tube was left nonconducting with a negative voltage on the first grid, thus completing the cycle.

The gamma-dose increment required to discharge the ionization chamber was directly proportional to the amount of charge transferred to the chamber (Figures B.1 and B.2, Appendix B). The charge transferred during each cycle was constant but dependent upon the triggering level of the electrometer, which was controlled by the adjustable bias voltage of the second grid. Calibration of detectors was achieved by adjustment of the bias voltage until a predetermined dose increment caused the electrometer to cycle (Appendix B). The calibration control for each chamber was located on the moistureproof electrometer housing attached to the base of the chamber assembly.

The ionization chambers were constructed of thin-walled aluminum spinnings mounted concentrically. Cylindrical and hemispherical surfaces were used wherever possible to establish optimum voltage gradients for efficient charge collection. The chambers were filled with pure argon at 7.5 psi and sealed by soft-soldering techniques over nickel-plated surfaces. The volumes of the two chambers were 1.475 cc and 14.0 cc for the low-range and high-range chambers, respectively. The sensitivity ratio of 1,000 between the two ranges was achieved by the design value of the input capacity of the electrometer circuits. A lead-tin filter over the entire outer surface of the detector provided reasonably uniform energy response from about 100 keV to 2 MeV (Figure B.3).

#### A.2 RECORDER SYSTEM

The recording medium was 900-foot lengths of instrumentation-quality magnetic tape spooled on standard 5-inch reels. The tape was 0.25 inch wide and had a polyester backing 0.001 inch thick. A Brush Electronics Company BK 1303-1 three-channel recording head, driven to tape saturation, recorded unidirectional pulses on the tape. The maximum usable pulse packing was 400 bits per inch of tape. Re-

previous-  
able for  
mproved  
proved  
ment of  
  
nization  
(4) control  
aluminum  
d detector  
the de-  
  
ization  
cycling  
oscillation  
on chan-  
of the  
ie first  
a pulse  
stant  
The  
th a  
  
ional t  
trans-  
which  
level  
cycle  
meter  
  
ically  
grad-  
ed by  
475 c  
000 te-  
reuts  
respon-

ording intervals of 12 hours and 60 hours were used, with tape transport speeds of 0.25 and 0.05 in./sec, respectively. These speeds were accurate to  $\pm 2$  percent for the entire recording interval. Both recorders were of identical construction with the exception of the drive motors. A single 6.7-volt mercury-battery stack having a capacity of 14,000 ma-hr powered each recorder. The 12-hour recorder was driven by a 2-watt motor operating at a speed of 6,000 rpm and regulated by a centrifugal governor. A 0.75-watt, chronometrically governed motor rotating at 900 rpm operated the 60-hour recorder. Both recorders utilized gear reduction and worm-gear drive. The tape was guided in the conventional manner. Metal friction plates on the feed spindle established an average tape tension of about 4 ounces. Contacts on the recorder turned off the instrument when a conductive section of tape at the end of the reel passed over them to cause a circuit closure. Both recorders were developed at U.S. Naval Radiological Defense Laboratory (NRDL) in conjunction with the Precision Instruments Company, San Carlos, California.

The dose increments chosen for the low- and high-range ionization chambers were 0.243 mr and 0.243 r, respectively. At the maximum intensity of each range, the maximum-usable pulse packing on the tape limited the recycling rate of the electrometer to 100 cps (87,500 r/hr) for the 12-hour recording interval and to 20 cps (17,500 r/hr) for the 60-hour interval. These dose increment and dose-rate values apply only to the particular detector orientation and gamma energy chosen for the calibration (Appendix B).

As radiation data was recorded on the two channels of the three-channel tape, bits were recorded on the third channel at 3.75-second intervals to establish a time reference for data reduction. The time bits were generated by a cam-operated switch driven by a low-power, 6-volt, direct-current, chronometrically governed motor. The accuracy of these pulses was  $\pm 0.5$  percent. The timer was manufactured by the Hayden Company and was used because of its known accuracy and high reliability.

The function of the control circuit was to start and to turn off the instrument. Power to all the motors and to the filaments was controlled by means of a latching relay. This relay could be activated locally by a switch on the instrument or remotely by a contact closure through a cable into the instrument. The instrument could be turned off by deactivation of the relay with the switch on the instrument or by the tape-actuated turnoff switch on the recorder.

Mercury batteries were used to power the motors and the filaments in order to take advantage of the high current capacity and flat-discharge characteristics these batteries offer. In addition, a mercury battery with very-low current drain was used in the electrometer-calibration circuit to restrict calibration shift to less than  $\pm 1$  percent during the expected life of the battery. Chamber bias and transistor bias were supplied by carbon batteries. With the exception of the motor battery, the minimum battery life was in excess of 250 hours. However, the 12-hour recorder could be operated in excess of 26 hours and the 60-hour recorder in excess of 80 hours without a battery change.

### A.3 DESIGN LIMITS FOR OPERATION

All components were designed to operate under the following maximum conditions: (1) a shock of 15 g at 11 msec in all planes, (2) vibrations of 12 g at frequencies up to 45 cps in all planes, (3) temperature within the detector of 120 degrees F, (4) temperature within the main instrument assembly at 155 degrees F, (5) ambient relative humidity of 100 percent, and (6) a static overpressure of 5 psi. During the operation, satisfactory performance beyond these limits was frequently observed.

### A.4 SHOCK MOUNTING

The GTR instruments were installed throughout the three target ships. Because of the high shock expected on these platforms, all instruments were shock mounted for approximately 6 inches of deflection. An eight-point suspension from steel springs in lines through the center of gravity of the instrument was used to support the main instrument assembly. The natural frequency of the suspension was about 5 cps. The detector unit was supported from four springs in a horizontal plane through the center of gravity of the unit. The suspension had a natural frequency of 7 cps and allowed 5 inches of deflection.

### A.5 REMOTE-STARTING CIRCUIT

The limited recording time of the instruments and the requirement for unattended operation necessitated remote triggering of the instrument installations. A shipboard system was designed to meet this requirement (Figure A.5). The system consisted of the EG&G tone receiver and minus-5-minute relay, which was connected to the project control panel and relay system. The relay system consisted of latching relays, which were spaced throughout the ship. When activated by the timing signal, each latching relay started

~~CONFIDENTIAL~~

as many as four GTR instruments. The project control panel recorded the receipt of all H-5-minute signals and could manually be set to lock out the EG&G signal or arm the project relay system and to reset all project relays. The triggering systems were similar on the three target ships.

**BEST AVAILABLE COPY**

**CONFIDENTIAL**

minute  
id to re-

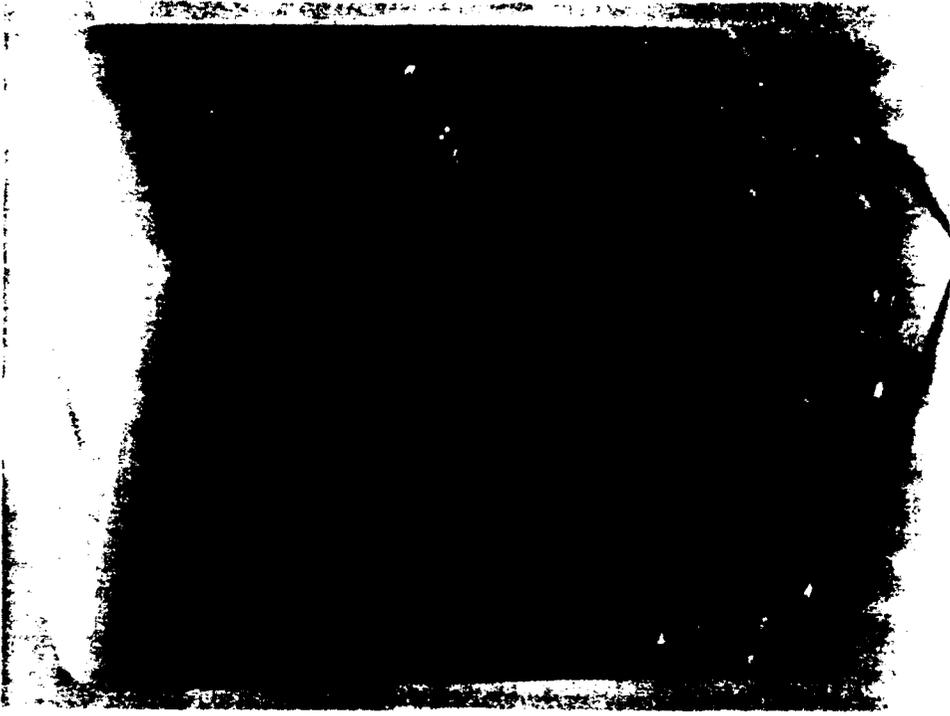


Figure A.2 GITR Model 103 instrument with watertight case.

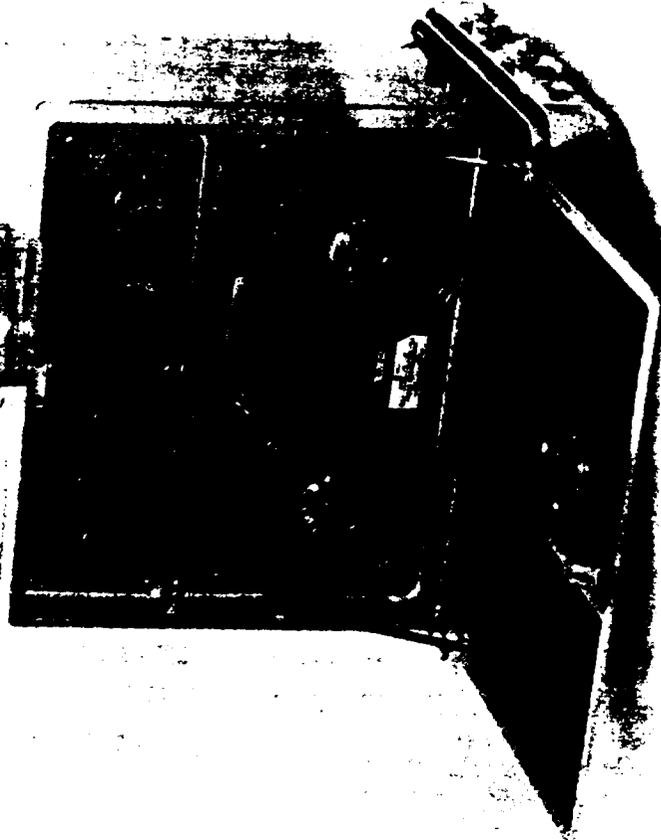


Figure A.1 GITR Model 103 instrument with the outer watertight case cover removed. The detector is shown mounted on main instrument assembly.

BEST AVAILABLE COPY

in forward quarters (first platform) aboard target ships.

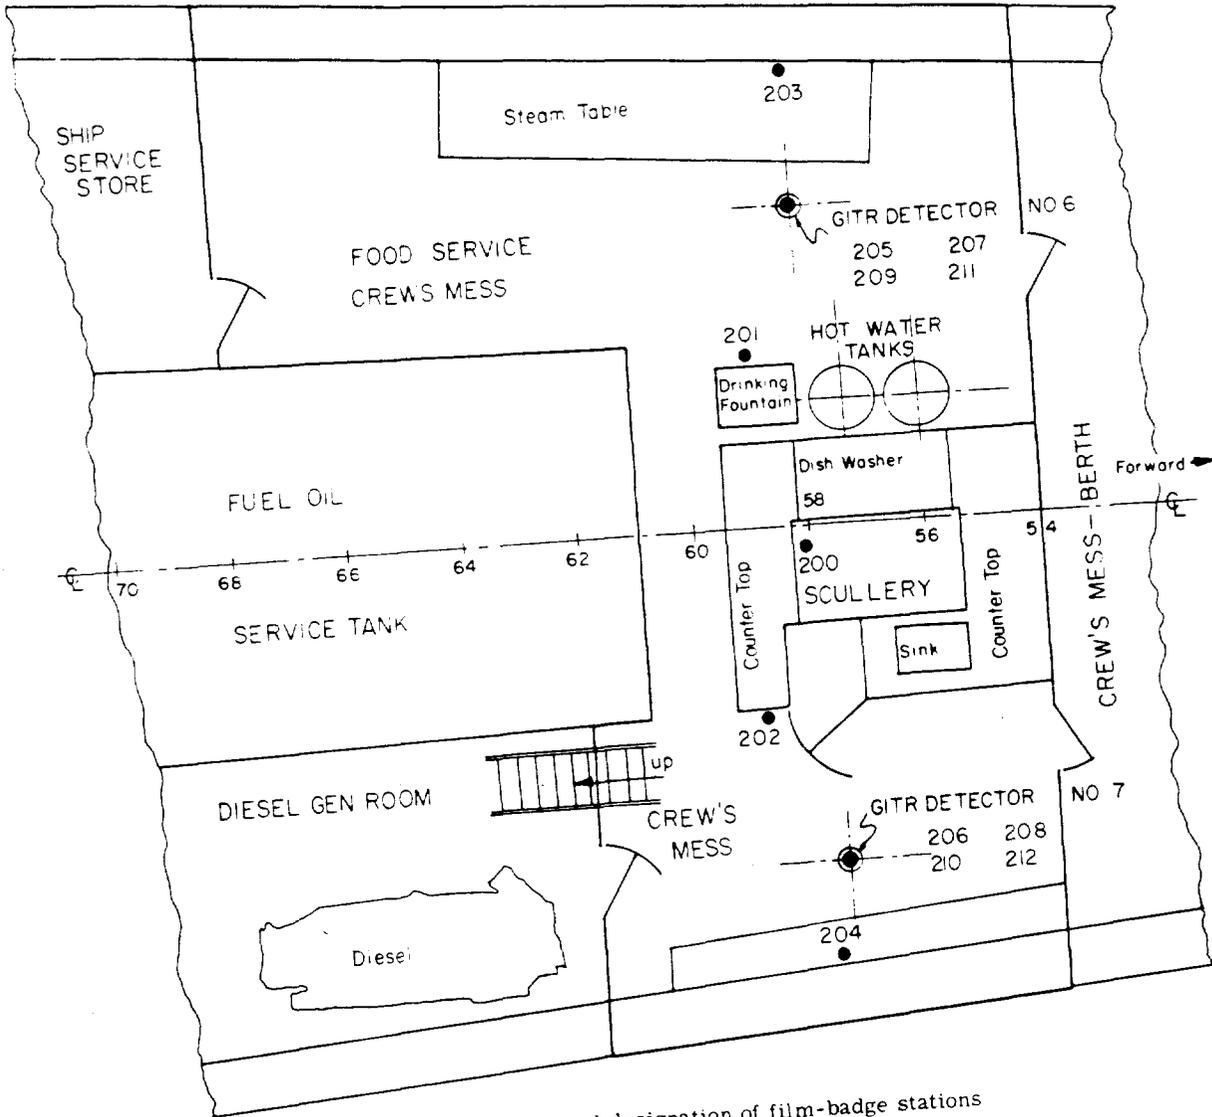


Figure C.3 Location and designation of film-badge stations in crew's mess (second platform) aboard target ships.

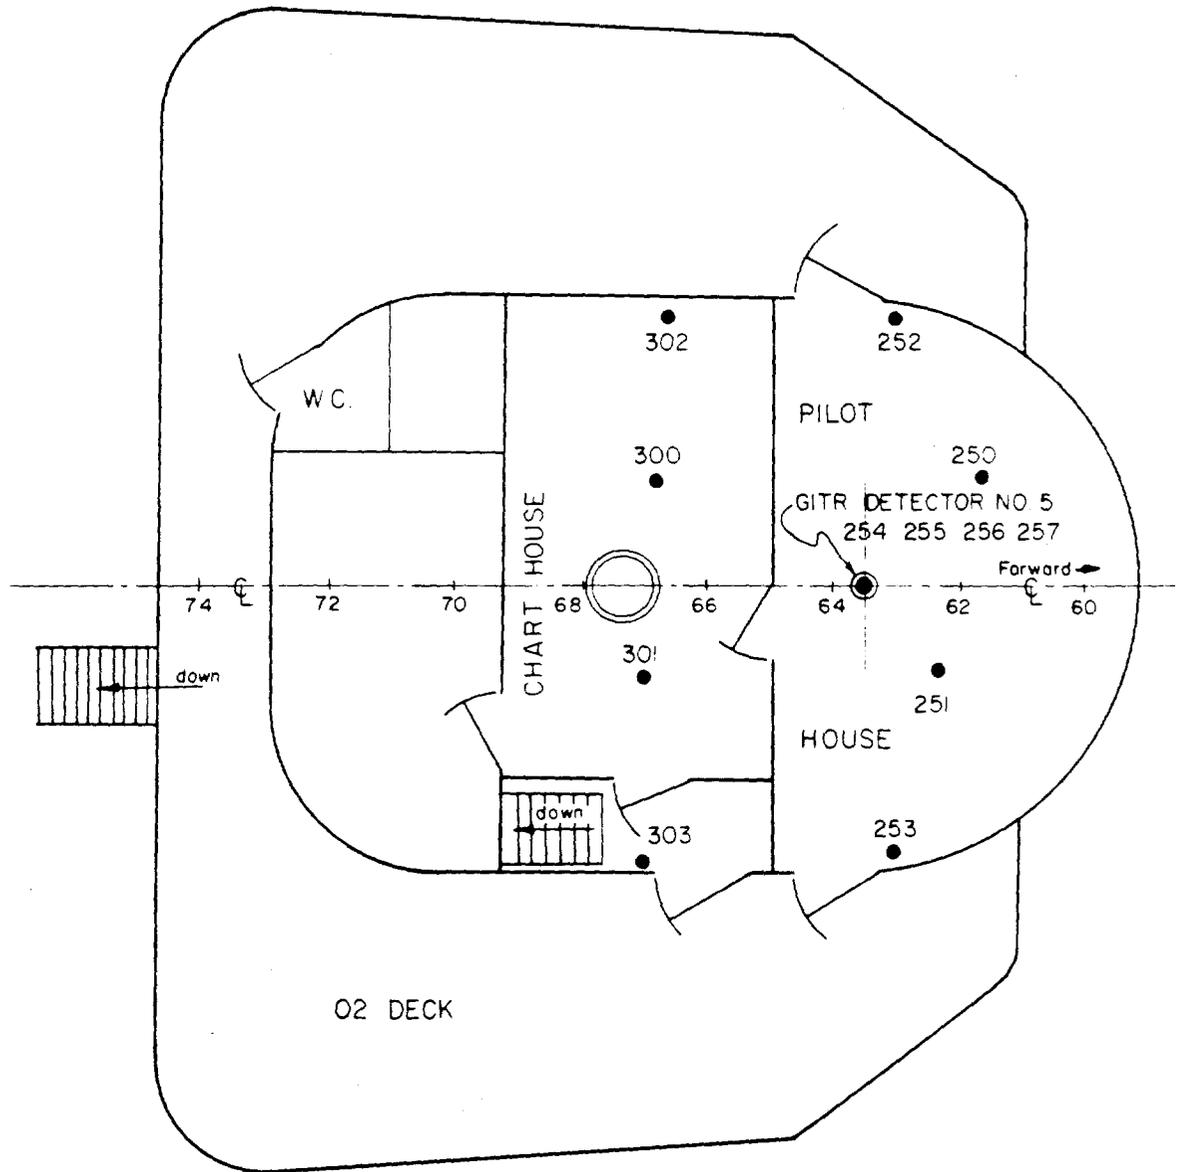


Figure C.4 Location and designation of film-badge stations in pilot house and chart house (02 level) aboard target ships.

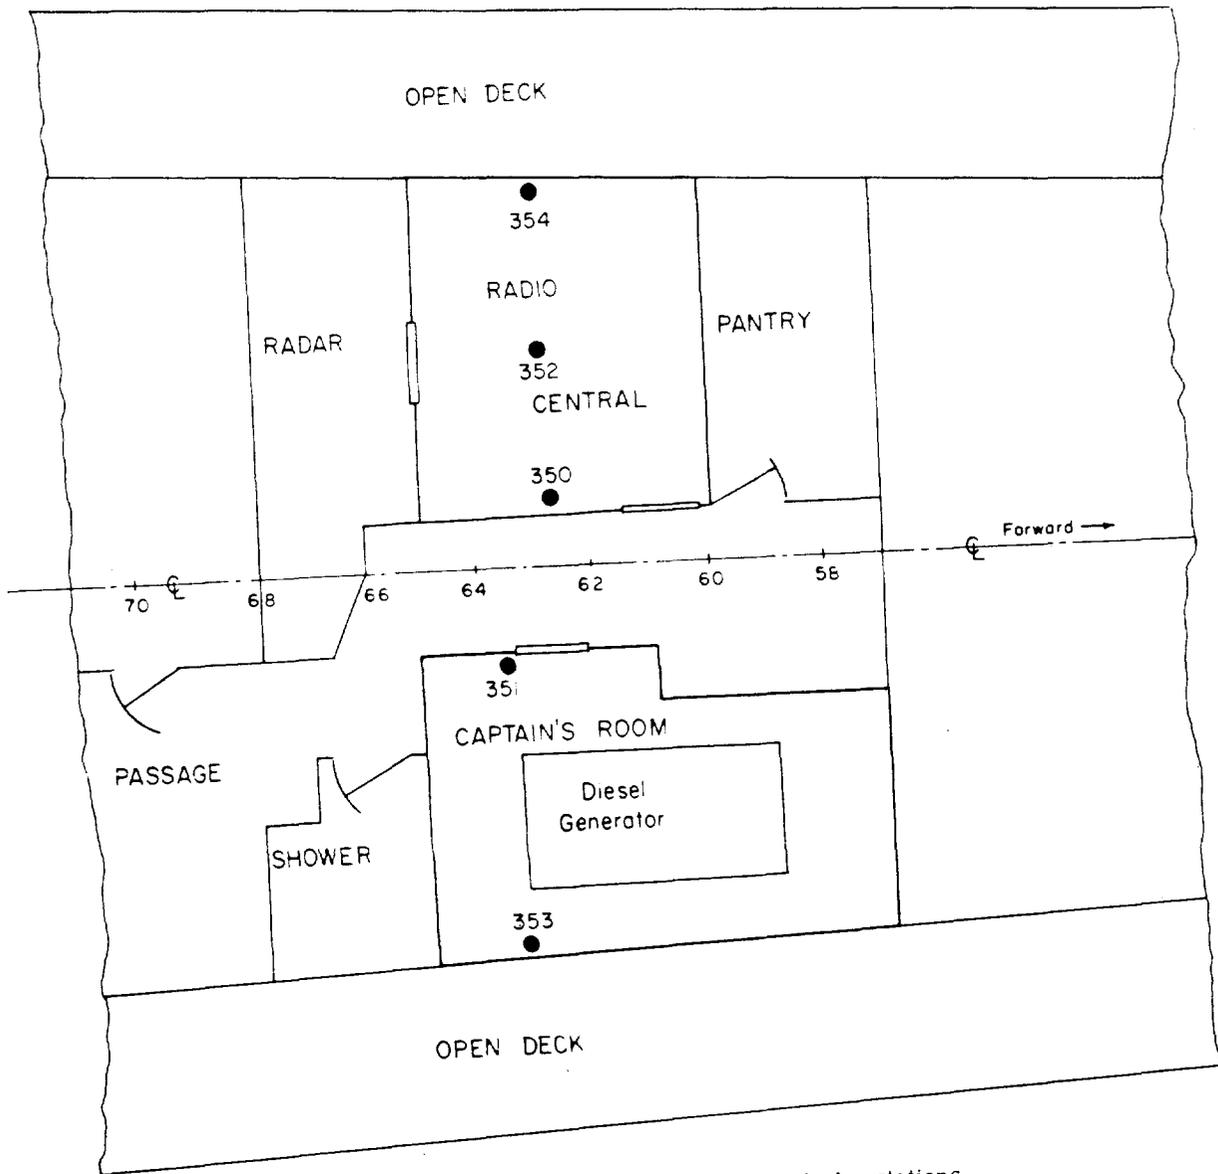


Figure C.5 Location and designation of film-badge stations in radio central (main deck) aboard target ships.


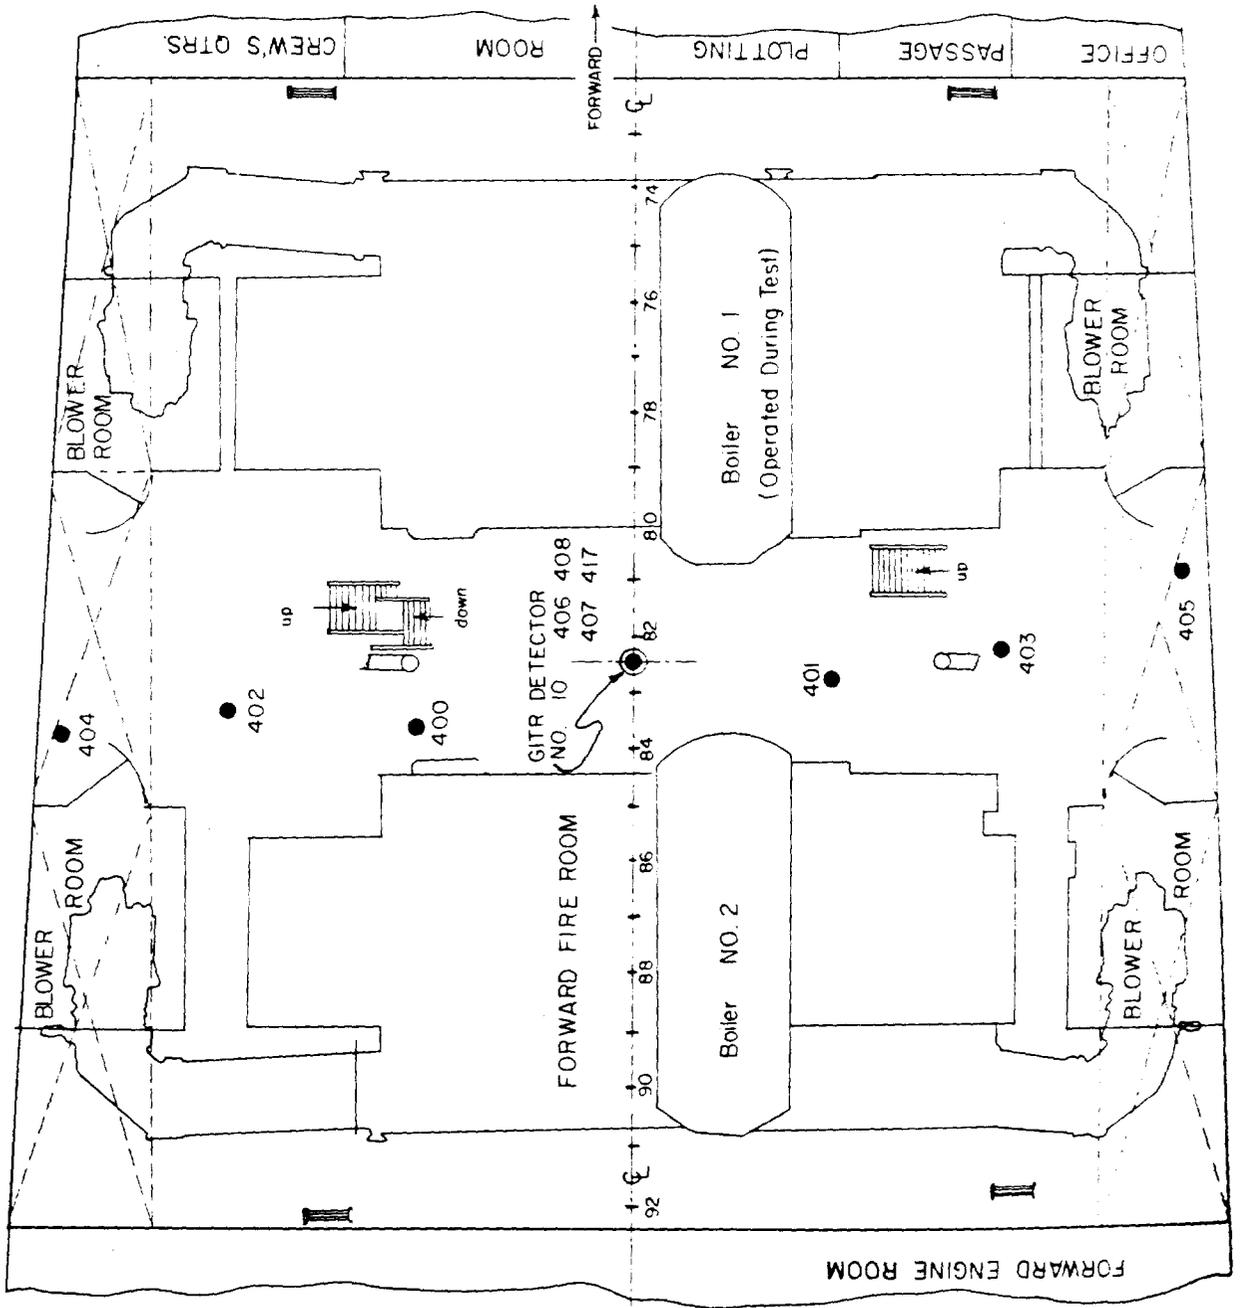


Figure C.6 Location and designation of film badge stations in forward fire room (upper level) aboard target ships.

Figure C.6 Location and designation of film-badge stations in forward fireroom (upper level) aboard target ships.

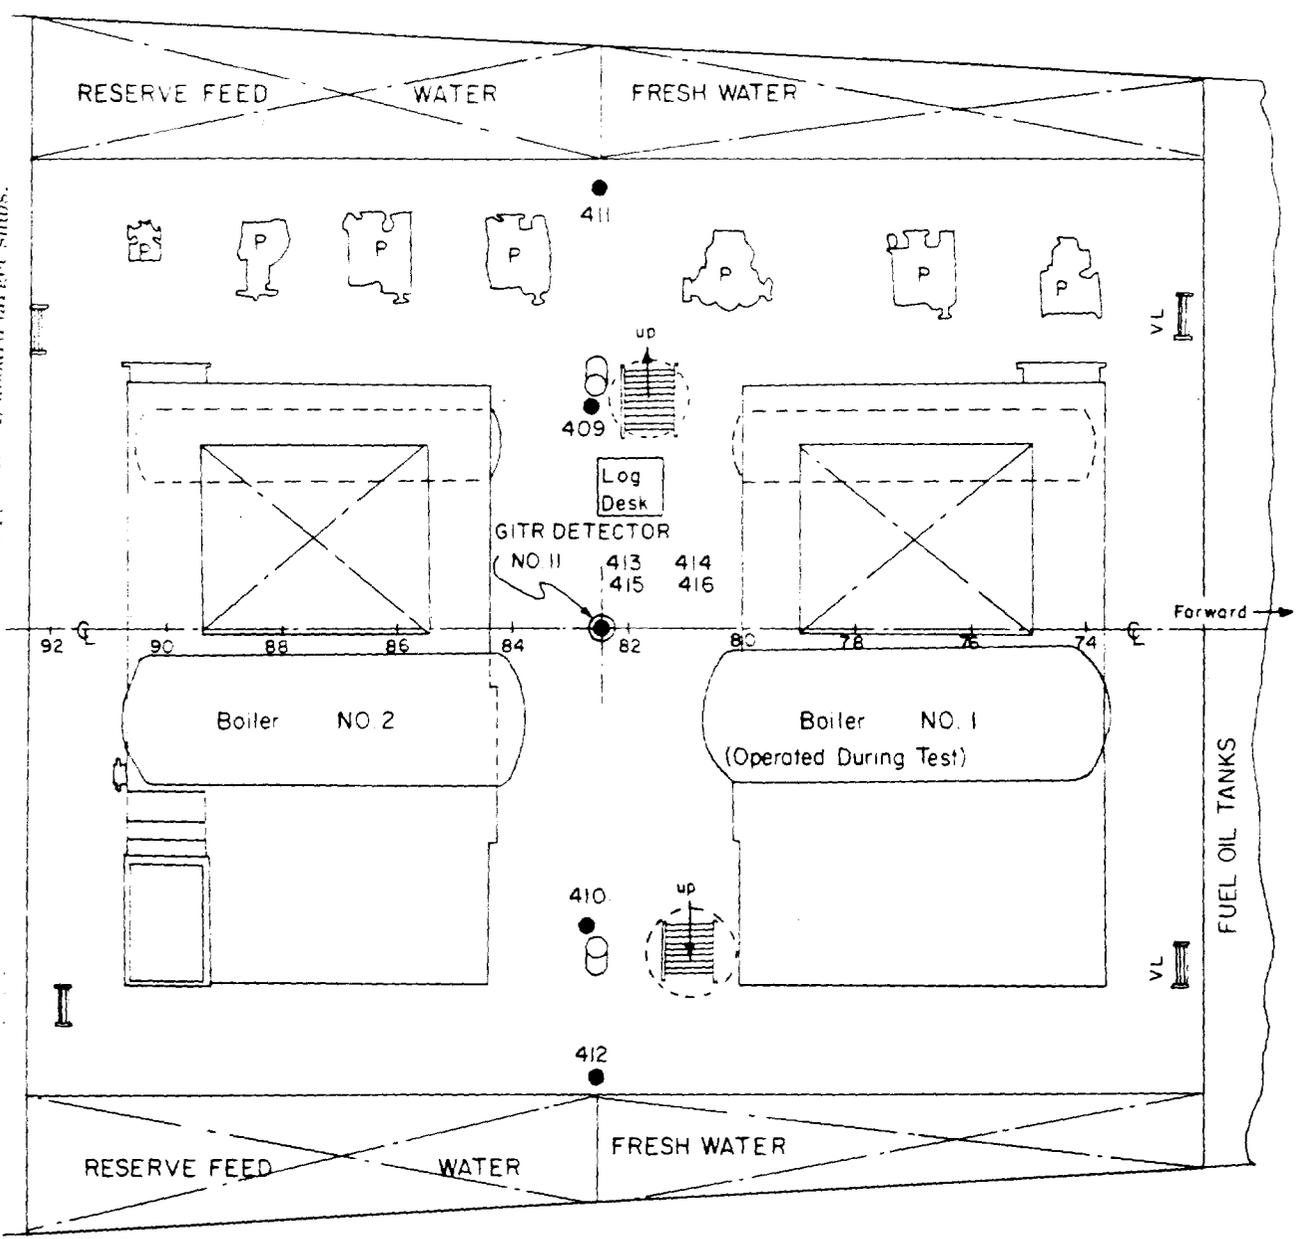

Note. Items Marked "P" are Pumps

Figure C.7 Location and designation of film-badge stations in forward fireroom (lower level) aboard target ships.

**BEST AVAILABLE COPY**

~~CONFIDENTIAL~~



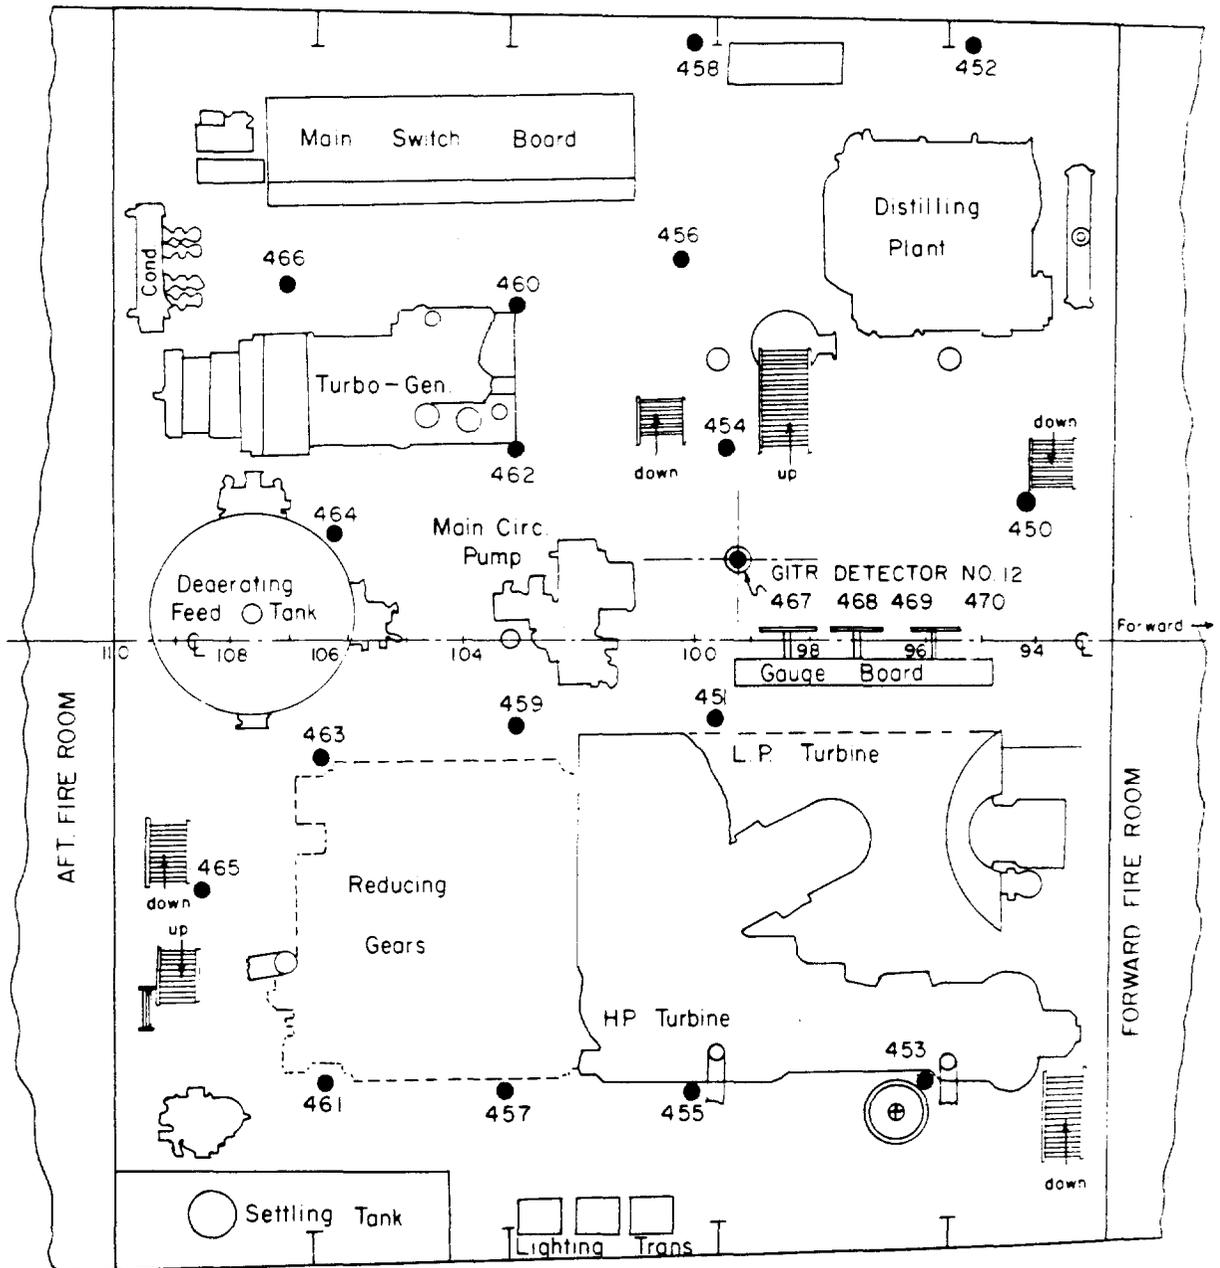


Figure C.8 Location and designation of film-badge stations in forward engine room (upper level) aboard target ships.

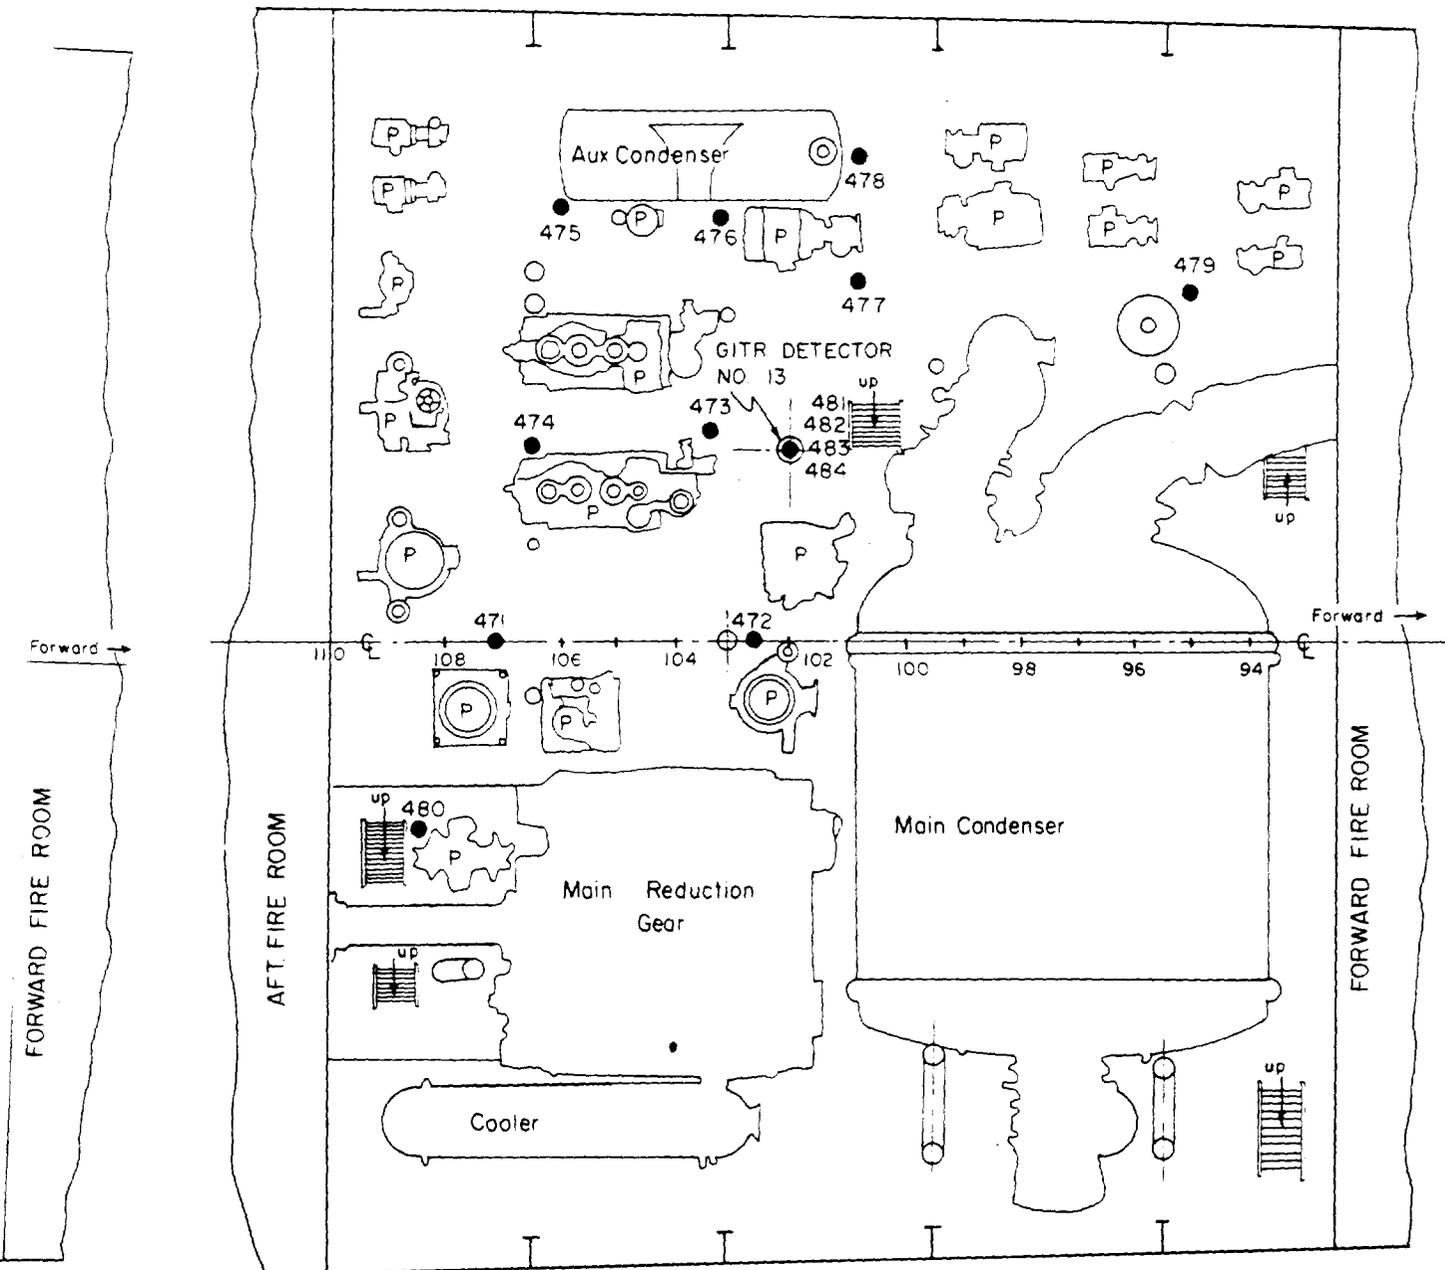

Note: Items Marked "P" are Pumps

Figure C.9 Location and designation of film-badge stations in forward engine room (lower level) aboard target ships.

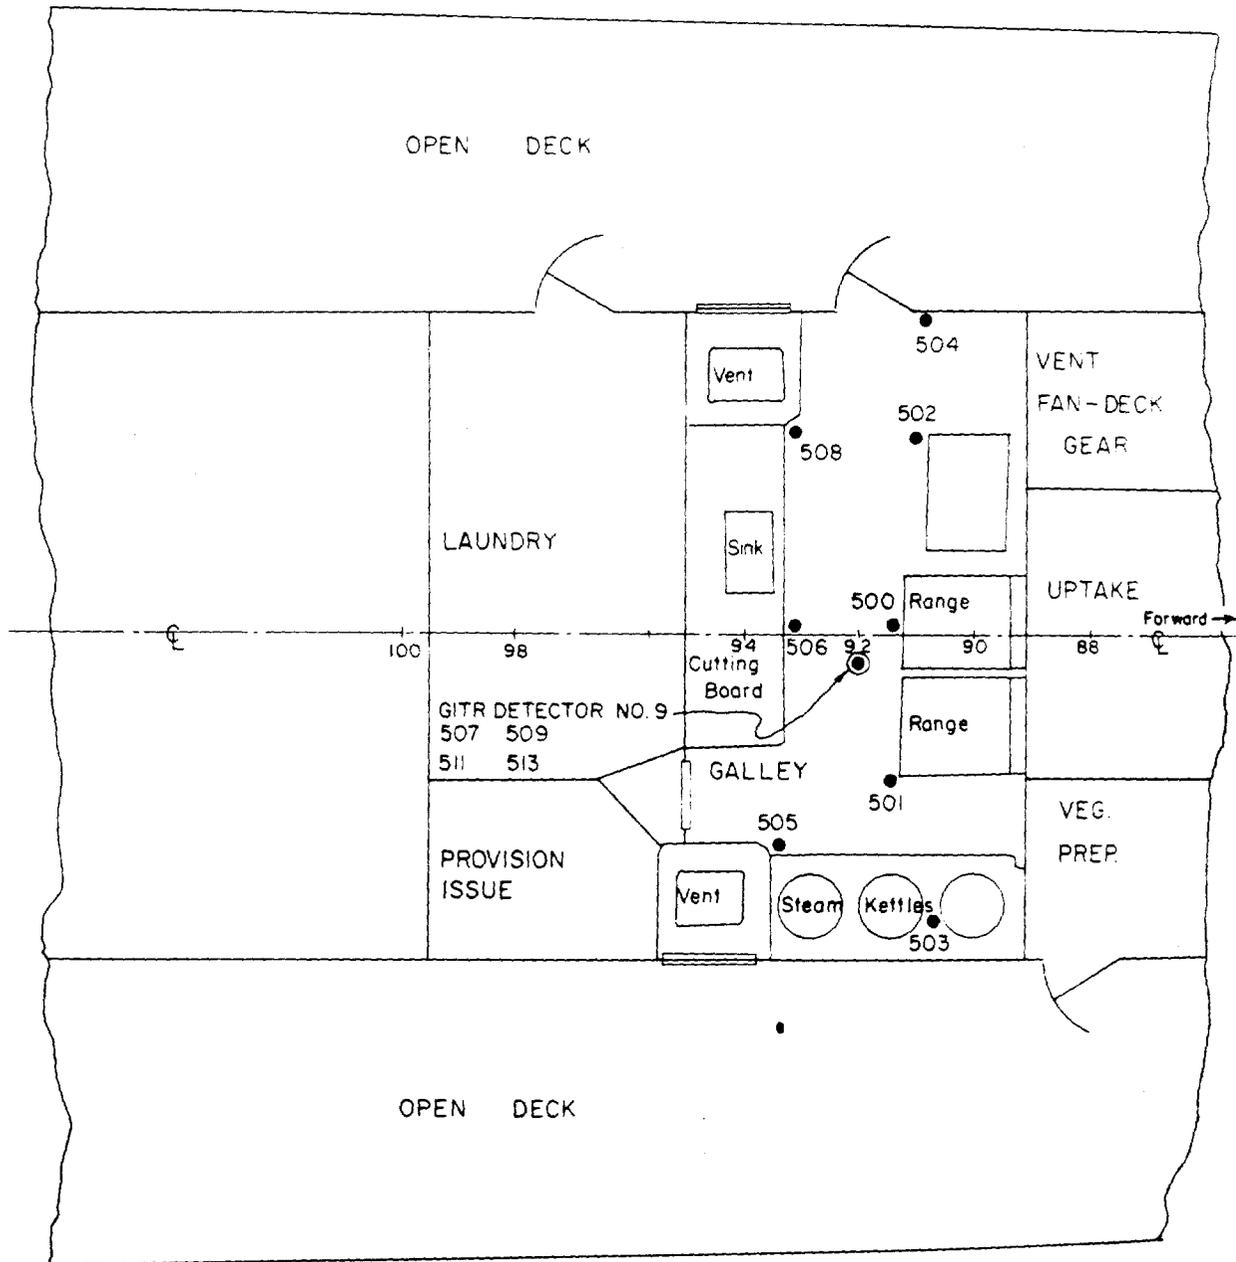

Note: DD592 Galley Equipment Removed Prior to Tests.

Figure C.10 Location and designation of film-badge stations in galley (main deck) aboard target ships.


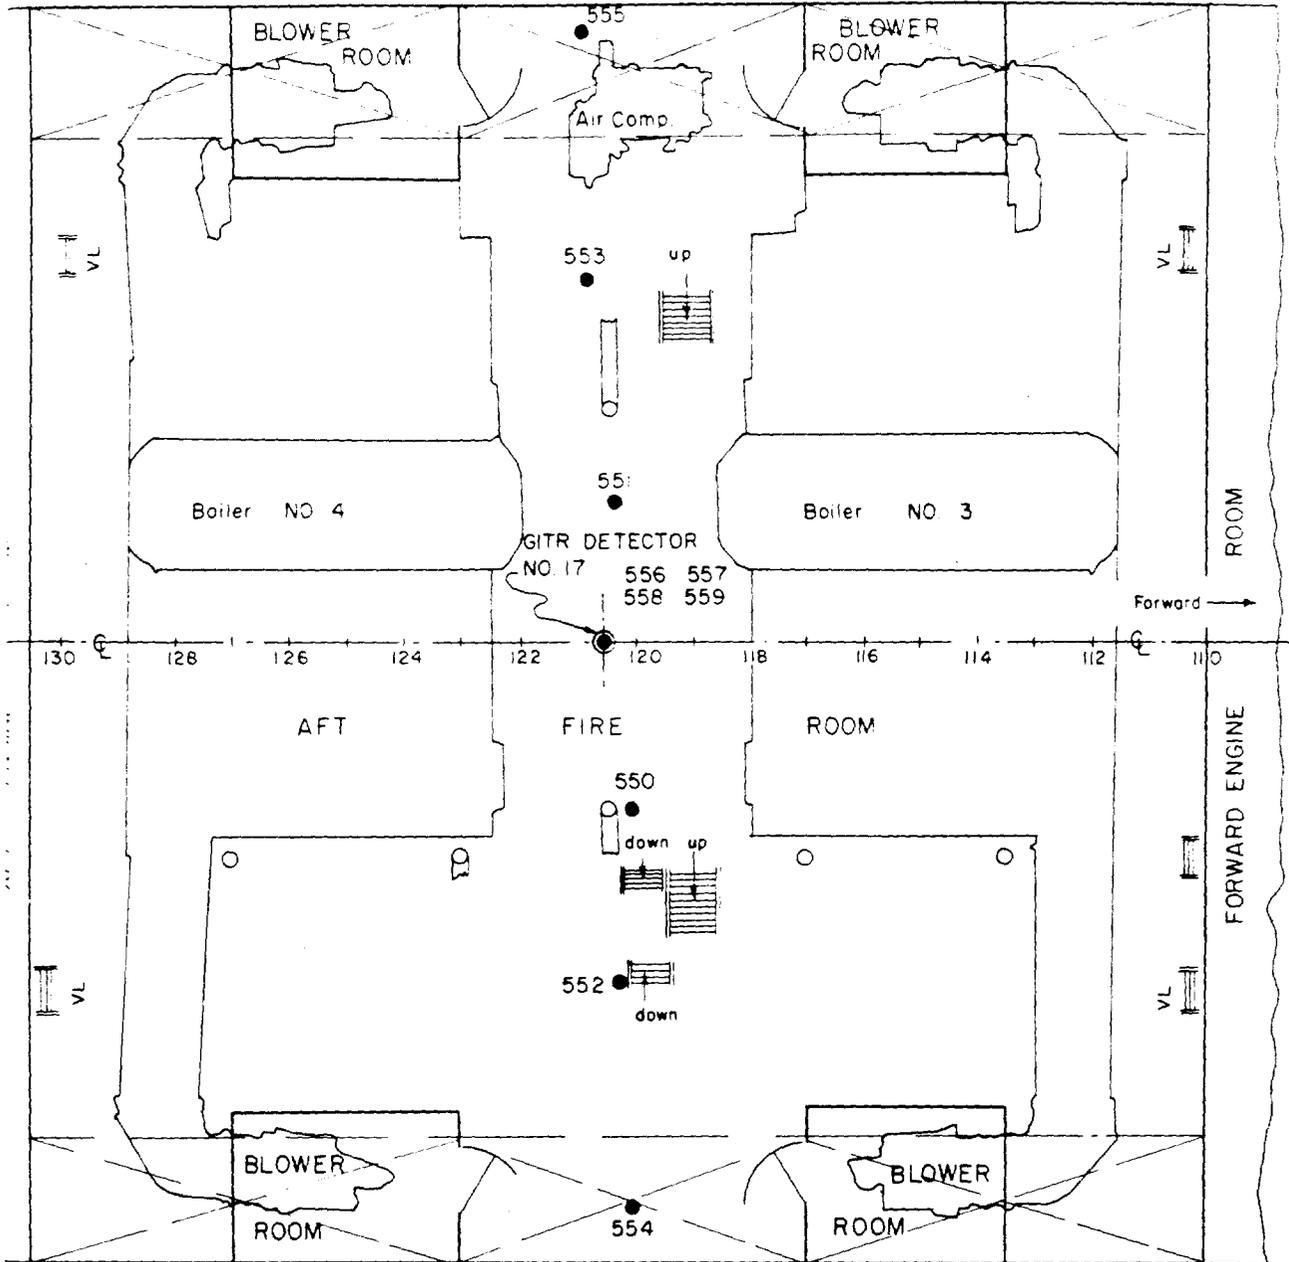


Figure C.11 Location and designation of film-badge stations in aft fireroom (upper level) aboard DD 592.

**BEST AVAILABLE COPY**

**CONFIDENTIAL**

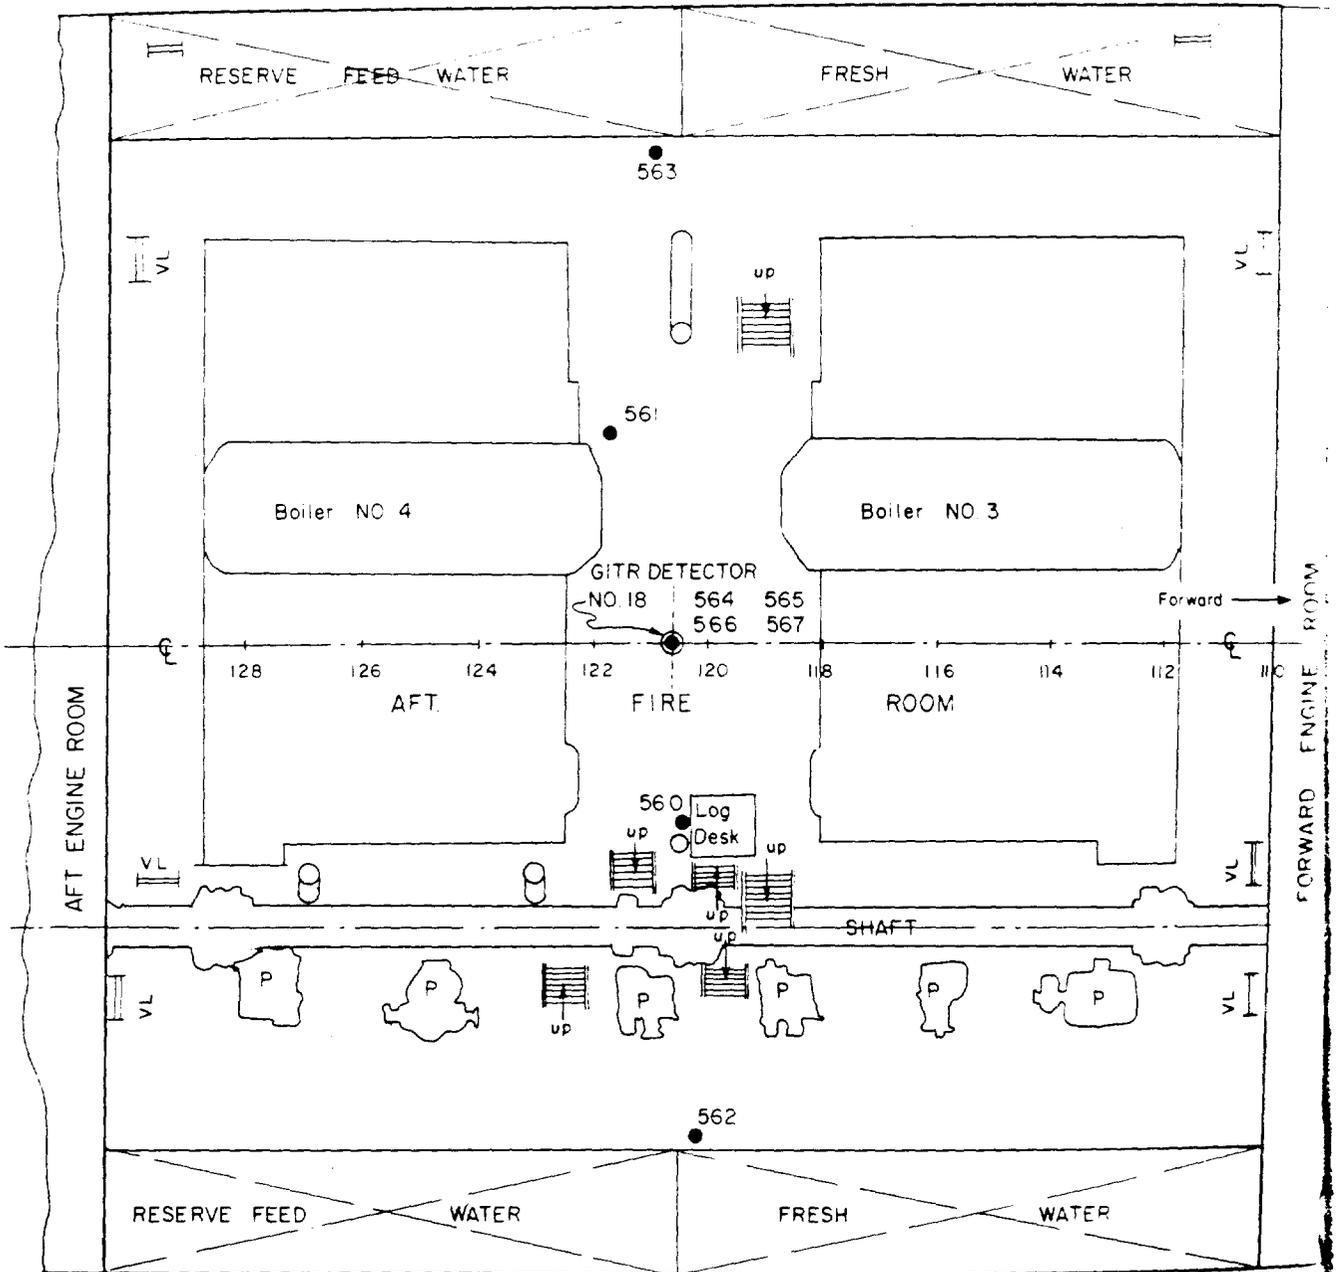


Note: Items Marked "P" are Pumps

Figure C.12 Location and designation of film-badge stations in aft fireroom (lower level) aboard DD 592.

BEST AVAILABLE COPY

CONFIDENTIAL

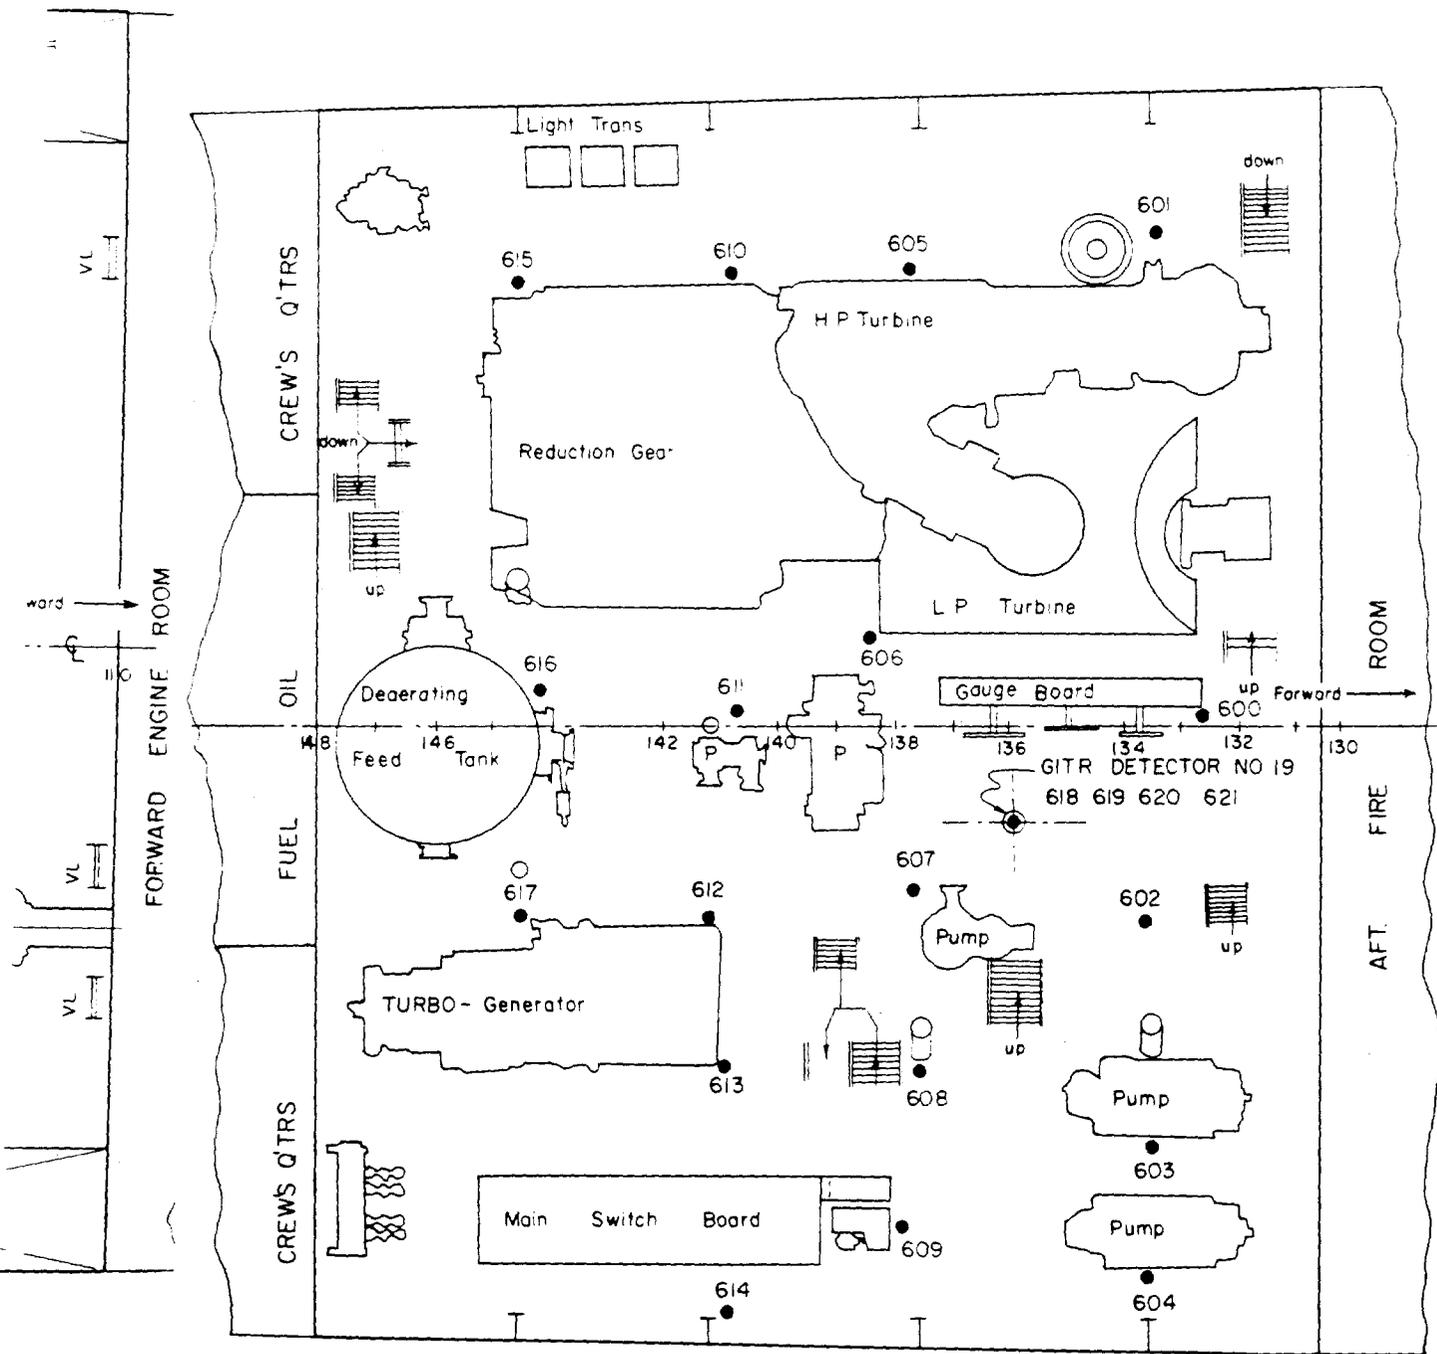


Note: Items Marked "P" are Pumps

Figure C.13 Location and designation of film-badge stations in aft engine room (upper level) aboard DD 592.

BEST AVAILABLE COPY

~~CONFIDENTIAL~~

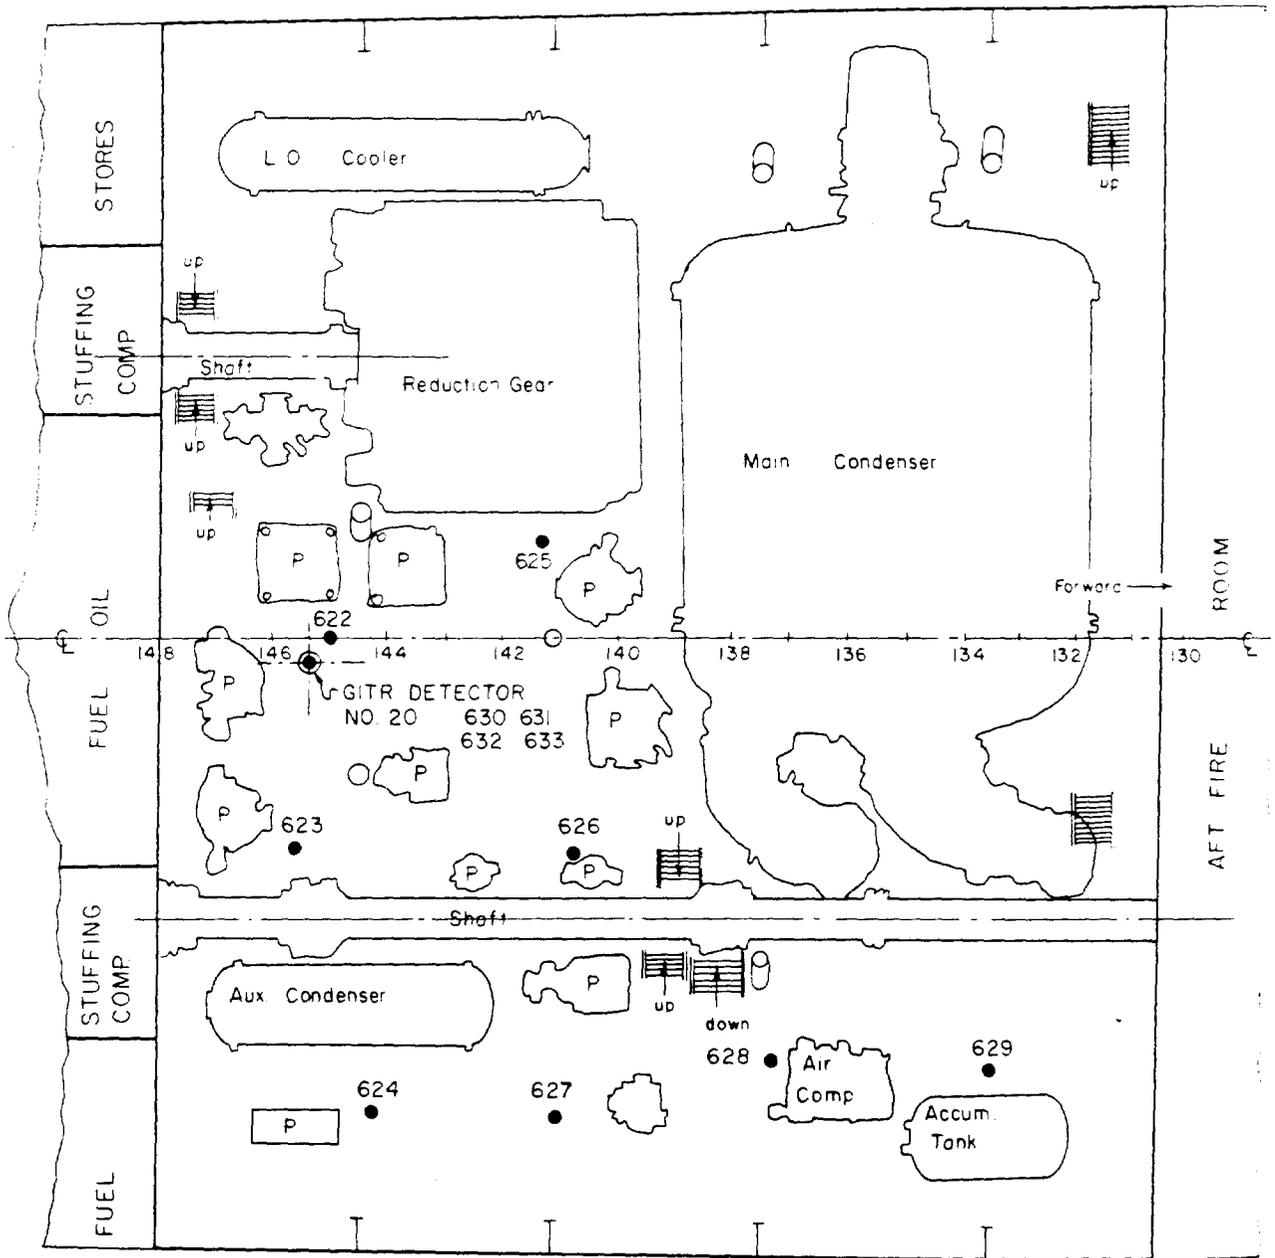

Note: Items Marked "P" are Pumps

Figure C.14 Location and designation of film-badge stations in aft engine room (lower level) aboard DD 592.

BEST AVAILABLE COPY

CONFIDENTIAL

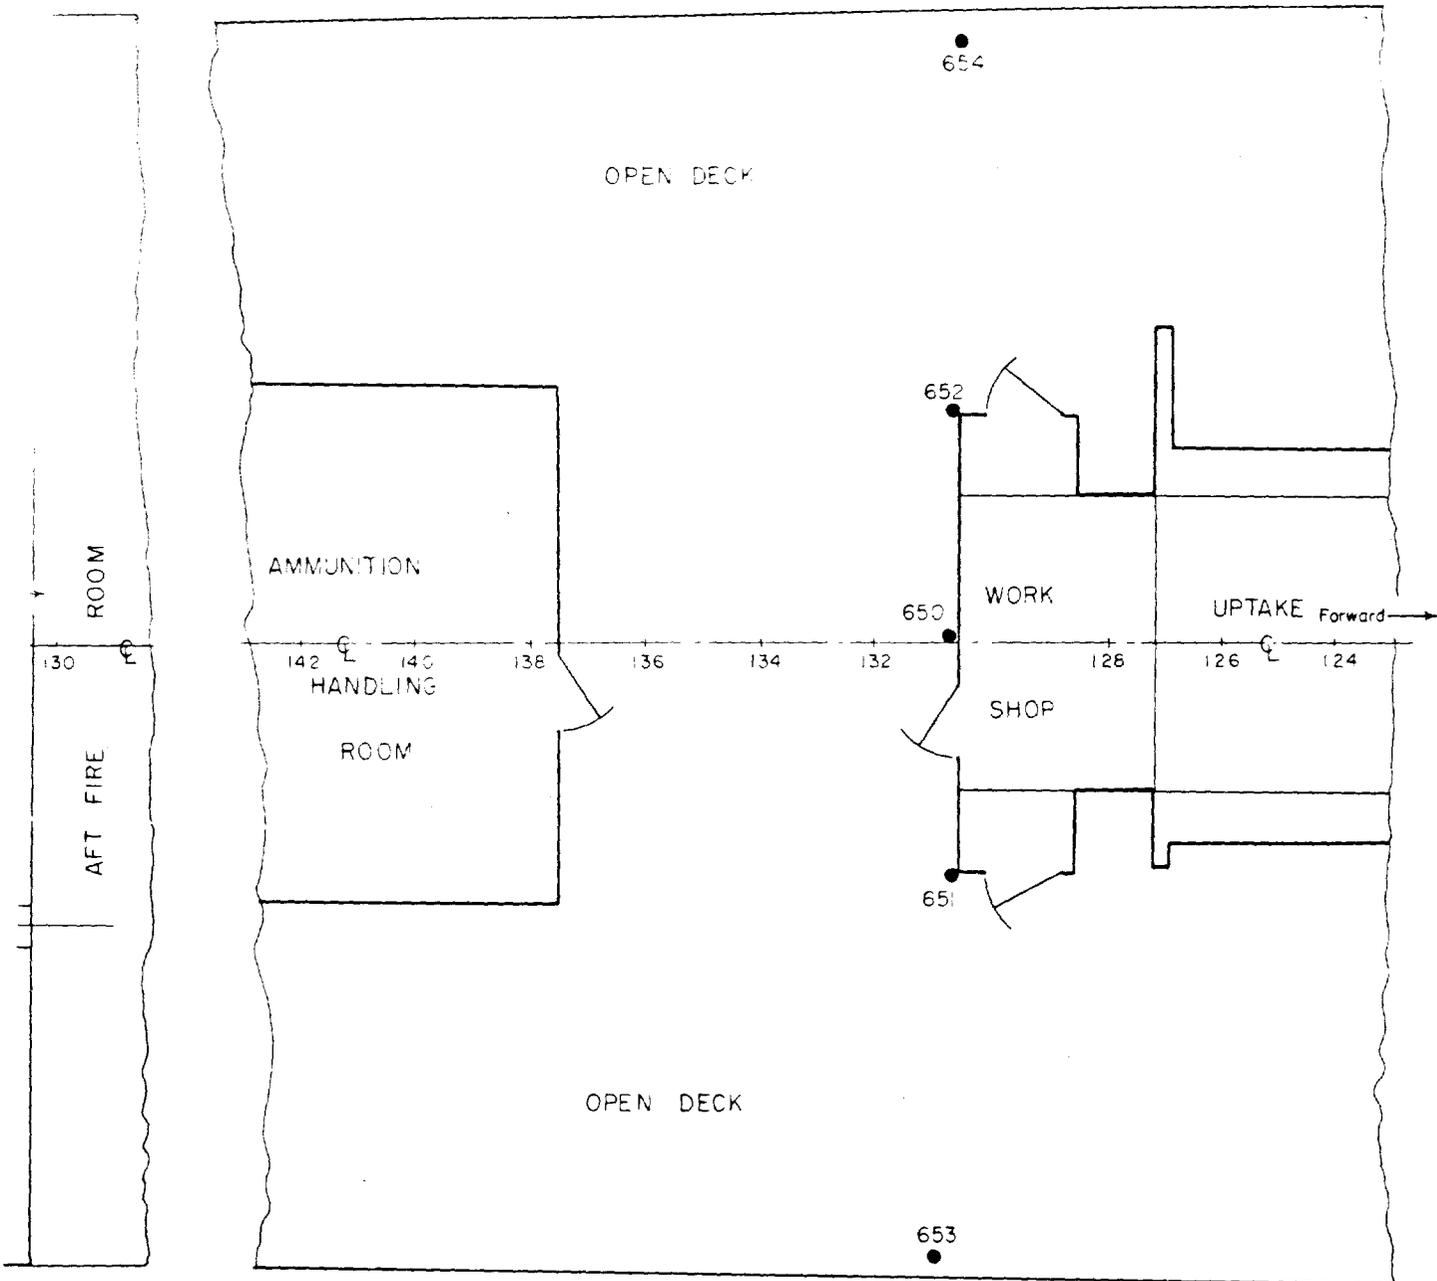


Figure C.15 Location and designation of film-badge stations on main deck (midship) aboard target ships.

BEST AVAILABLE COPY

~~CONFIDENTIAL~~

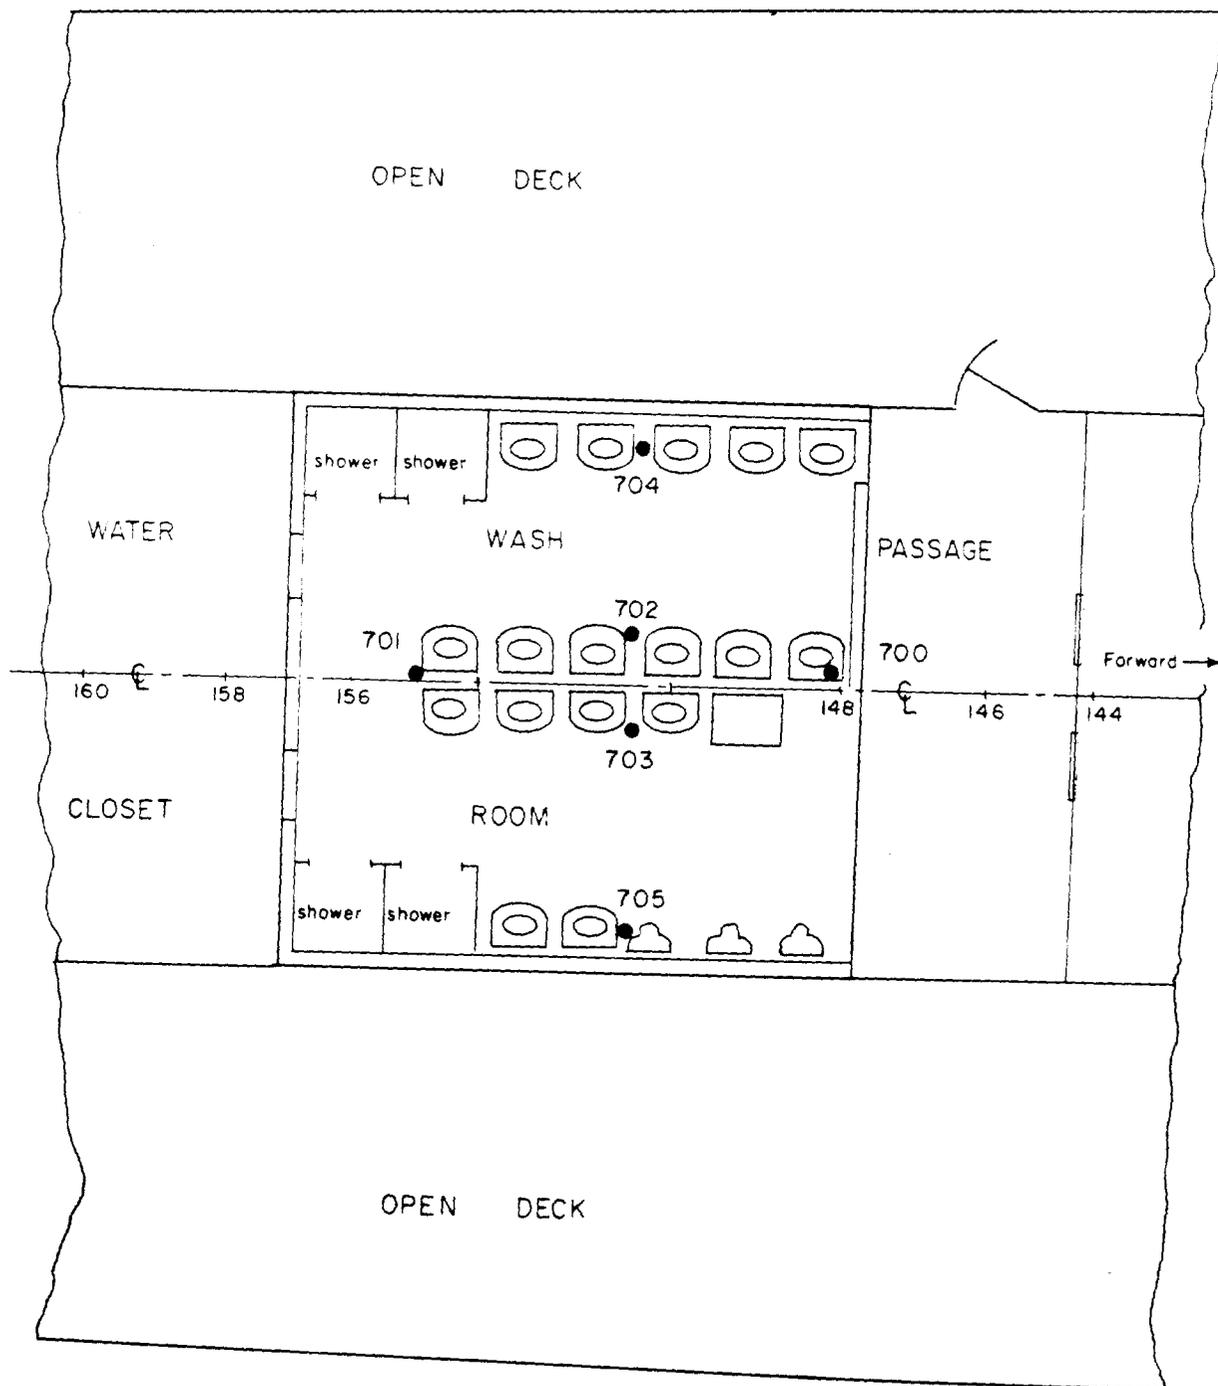


Figure C.16 Location and designation of film-badge stations in crew's washroom (main deck) aboard target ships.

**BEST AVAILABLE COPY**

~~CONFIDENTIAL~~

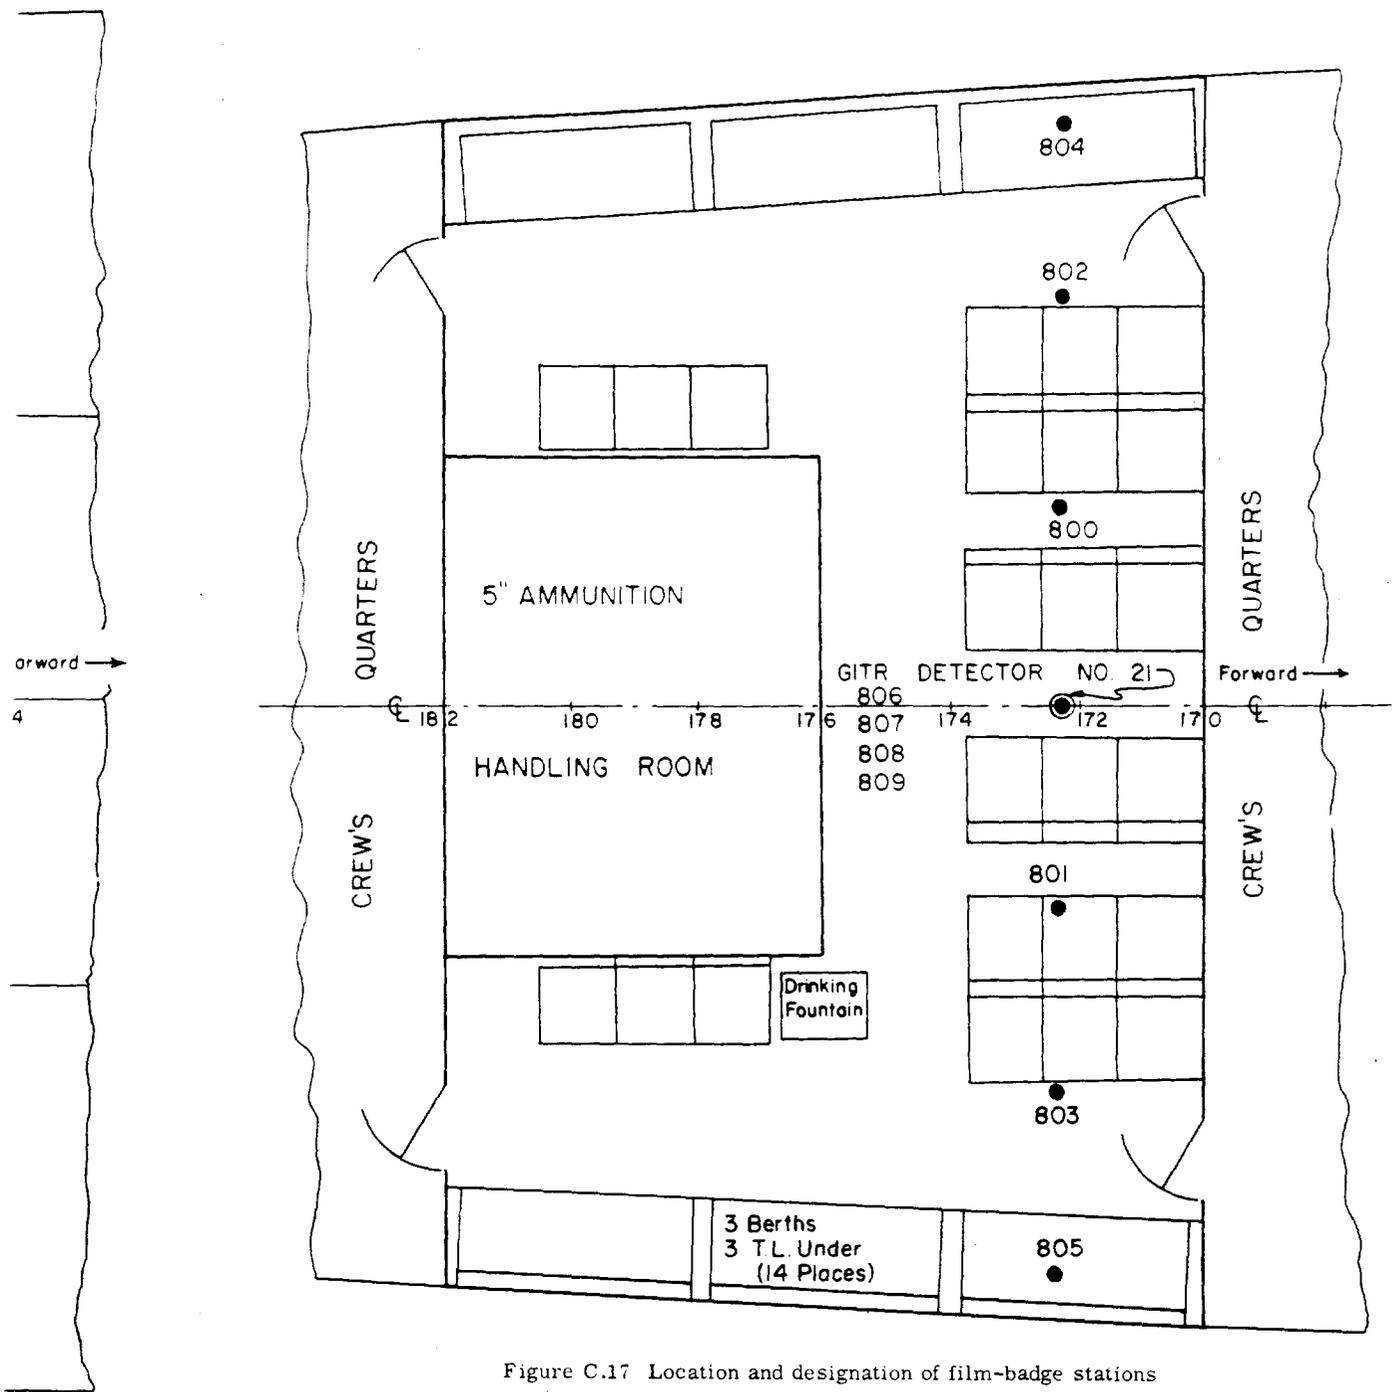


Figure C.17 Location and designation of film-badge stations in aft quarters (first platform) aboard target ships.

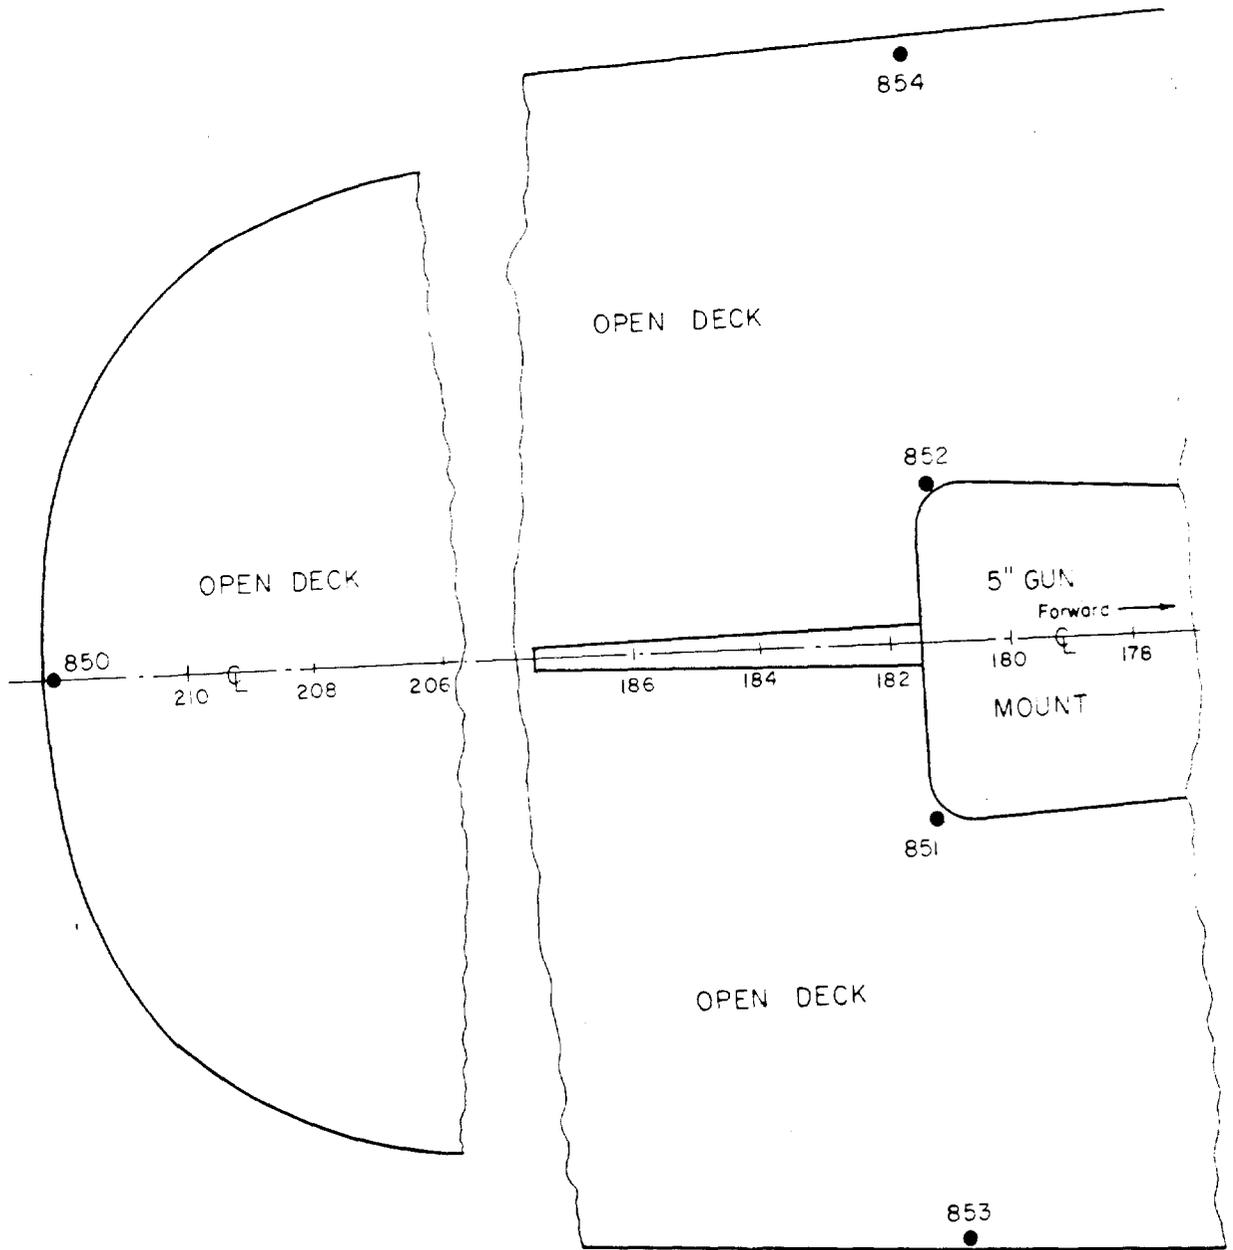


Figure C.18 Location and designation of film-badge stations on main deck (fantail) aboard target ships.

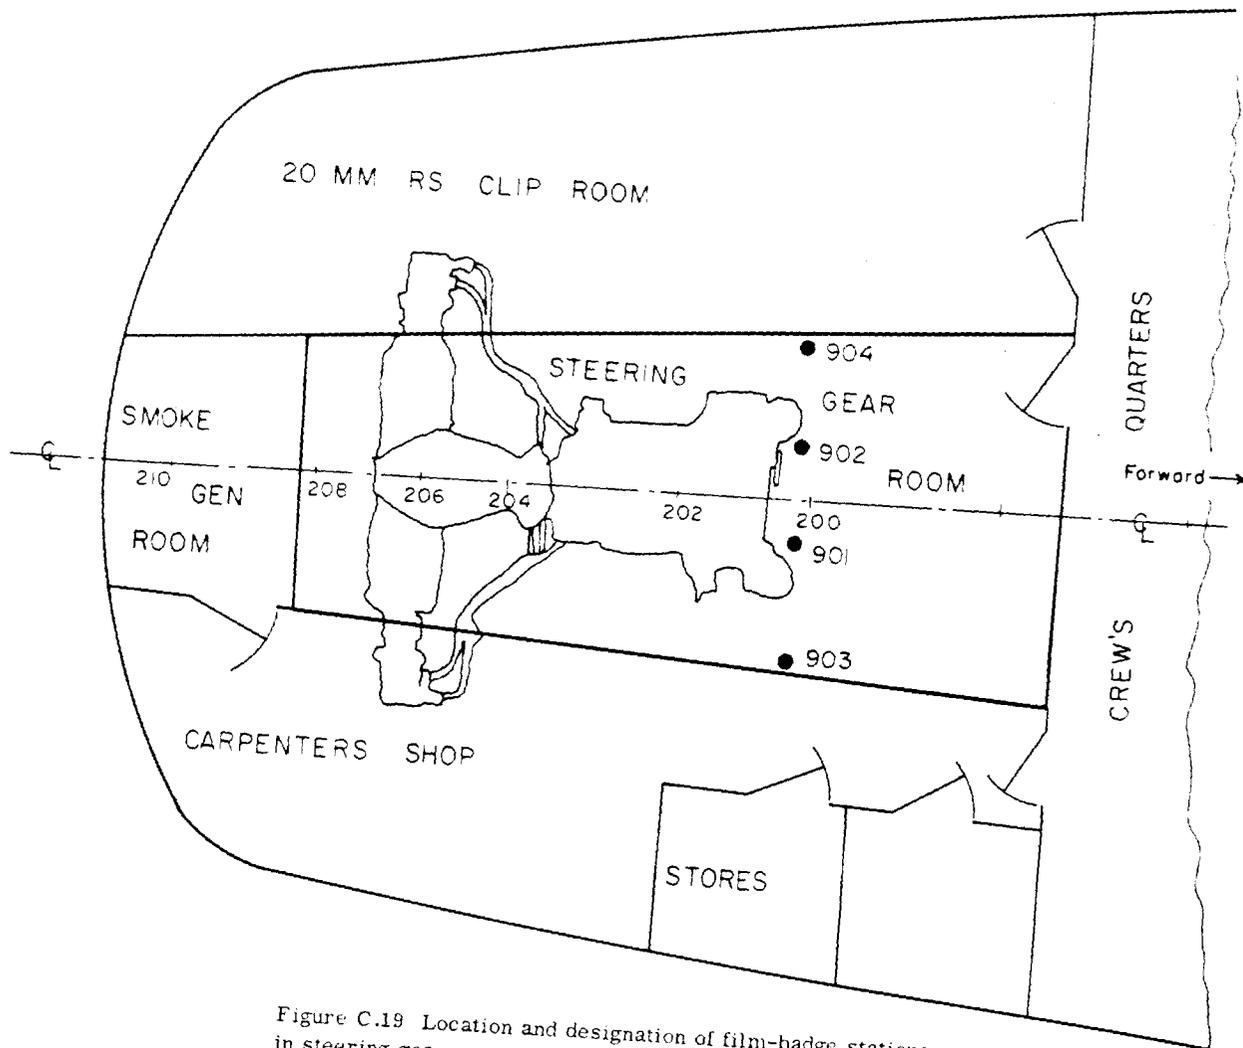


Figure C.19 Location and designation of film-badge stations in steering gear room (first platform) aboard target ships.

Appendix D

TABLATIONS OF GAMMA-RADIATION HISTORIES

Appendix D is not being published.

The appendix consists of 2 pages of text, 386 pages of numerical data tables (dose rates and doses versus time and location, and the like), and 3 figures that depict the estimated probable errors in average gamma dose rates and doses (versus time) on the weather decks of the target ships.

Initial distribution of Appendix D included 2 copies to Headquarters, Defense Atomic Support Agency (SWPET), 2 copies to Bureau of Ships (Codes 341 and 423), and 6 copies to U. S. Naval Radiological Defense Laboratory.

Readers desiring access to this more-basic data may obtain a copy on request sent to:

Commander  
Field Command, DASA  
ATTN: FCWT  
Sandia Base, New Mexico

## DISTRIBUTION

### Military Distribution Category 26

Agency  
at De-

Agency	Description	Agency	Description
	<b>ARMY ACTIVITIES</b>	44	Director, Armed Forces Institute of Pathology, Walter Reed Army Med. Center, 685 16th St., NW, Washington 25, D.C.
1	Deputy Chief of Staff for Military Operations, D/A, Washington 25, D.C. ATTN: Dir. of SWAF	45	Commanding Officer, U.S. Army Research Lab., Ft. Knox, Ky.
2	Chief of Research and Development, D/A, Washington 25, D.C. ATTN: Atomic Div.	46	Commandant, Walter Reed Army Inst. of Res., Walter Reed Army Medical Center, Washington 25, D.C.
3	Assistant Chief of Staff, Intelligence, D/A, Washington 25, D.C.	47-48	Commanding General, QM R&D Comd., QM R&D Cntr., Natick, Mass. ATTN: CBR Liaison Officer
4-7	Chief Chemical Officer, D/A, Washington 25, D.C.	49-50	Commanding General, QM Research and Engr. Comd., USA, Natick, Mass.
8	Chief of Engineers, D/A, Washington 25, D.C. ATTN: ENGINE	51-52	Commanding General, U.S. Army Chemical Corps, Research and Development Comd., Washington 25, D.C.
9	Chief of Engineers, D/A, Washington 25, D.C. ATTN: ENGINE	53-54	Commanding Officer, Chemical Warfare Lab., Army Chemical Center, Md. ATTN: Tech. Library
10-10	Office, Chief of Ordnance, D/A, Washington 25, D.C. ATTN: ORDN	55	Commanding General, Engineer Research and Dev. Lab., Ft. Belvoir, Va. ATTN: Chief, Tech. Support Branch
11	Chief Signal Officer, D/A, Research and Development Div., Washington 25, D.C. ATTN: SIGR--	56	Director, Waterways Experiment Station, P.O. Box 631, Vicksburg, Miss. ATTN: Library
12	Chief of Transportation, D/A, Office of Planning and Int., Washington 25, D.C.	57	Commanding Officer, Diamond Ordn. Fuse Labs., Washington 25, D.C. ATTN: Chief, Nuclear Vulnerability Br. (230)
13-14	The Surgeon General, D/A, Washington 25, D.C. ATTN: MEDNE	58-59	Commanding General, Aberdeen Proving Grounds, Md. ATTN: Director, Ballistics Research Laboratory
15-17	Commanding General, U.S. Continental Army Command, Ft. Monroe, Va.	60	Commanding Officer, Ordn. Materials Research Off., Watertown Arsenal, Watertown 78, Mass. ATTN: Dr. Foster
18	Director of Special Weapons Development Office, Headquarters COMARC, Ft. Bliss, Tex. ATTN: Capt. Chester I. Petersen	61	Commanding General, Ordnance Ammunition Command, Joliet, Ill.
19	President, U.S. Army Artillery Board, Ft. Sill, Okla.	62	Commanding Officer, USA Signal R&D Laboratory, Ft. Monmouth, N.J.
20	President, U.S. Army Air Defense Board, Ft. Bliss, Tex.	63	Commanding General, U.S. Army Electronic Proving Ground, Ft. Huachuca, Ariz. ATTN: Tech. Library
21	President, U.S. Army Aviation Board, Ft. Rucker, Ala. ATTN: ATBS-DG	64	Commanding General, USA Combat Surveillance Agency, 1124 N. Highland St., Arlington, Va.
22	Commanding General, First United States Army, Governor's Island, New York 4, N.Y.	65	Commanding Officer, USA, Signal R&D Laboratory, Ft. Monmouth, N.J. ATTN: Tech. Doc. Ctr., Evans Area
23	Commanding General, Second U.S. Army, Ft. George G. Meade, Md.	66	Director, Operations Research Office, Johns Hopkins University, 6935 Arlington Rd., Bethesda 14, Md.
24	Commanding General, Third United States Army, Ft. McPherson, Ga. ATTN: ACofS G-3	67	Commandant, U.S. Army Chemical Corps, CBR Weapons School, Dugway Proving Ground, Dugway, Utah.
25	Commanding General, Fourth United States Army, Ft. Sam Houston, Tex. ATTN: G-3 Section	68	Commanding General, Southern European Task Force, APO 168, New York, N.Y. ATTN: ACofS G-3
26	Commanding General, Fifth United States Army, 1660 E. Hyde Park Blvd., Chicago 15, Ill.	69	Commanding General, Eighth U.S. Army, APO 301, San Francisco, Calif. ATTN: ACofS G-3
27	Commanding General, Sixth United States Army, Presidio of San Francisco, San Francisco, Calif. ATTN: AMOCT-4	70	Commanding General, U.S. Army Alaska, APO 949, Seattle, Washington
28	Commandant, Army War College, Carlisle barracks, Pa. ATTN: Library	71	Commanding General, U.S. Army Caribbean, Ft. Amador, Canal Zone. ATTN: Cml Office
29	Commandant, U.S. Army Command & General Staff College, Ft. Leavenworth, Kansas. ATTN: ARCHIVES	72	Commander-in-Chief, U.S. Army Pacific, APO 958, San Francisco, Calif. ATTN: Ordnance Officer
30	Commandant, U.S. Army Air Defense School, Ft. Bliss, Tex. ATTN: Command & Staff Dept.	73	Commanding General, USARFANT & MDPF, Ft. Brooke, Puerto Rico
31	Commandant, U.S. Army Armored School, Ft. Knox, Ky.	74	Commanding Officer, 9th Hospital Center, APO 180, New York, N.Y. ATTN: CO, US Army Nuclear Medicine Research Detachment, Europe
32	Commandant, U.S. Army Artillery and Missile School, Ft. Sill, Okla. ATTN: Combat Development Department		<b>NAVY ACTIVITIES</b>
33	Commandant, U.S. Army Aviation School, Ft. Rucker, Ala.	75-76	Chief of Naval Operations, D/N, Washington 25, D.C. ATTN: OP-03EG
34	Commandant, U.S. Army Infantry School, Ft. Benning, Ga. ATTN: C.D.S.	77	Chief of Naval Operations, D/N, Washington 25, D.C. ATTN: OP-75
35	The Superintendent, U.S. Military Academy, West Point, N.Y. ATTN: Prof. of Ordnance	78	Chief of Naval Operations, D/N, Washington 25, D.C. ATTN: OP-922G2
36	Commandant, The Quartermaster School, U.S. Army, Ft. Lee, Va. ATTN: Chief, QM Library	79	Chief of Naval Personnel, D/N, Washington 25, D.C.
37	Commandant, U.S. Army Ordnance School, Aberdeen Proving Ground, Md.	80-81	Chief of Naval Research, D/N, Washington 25, D.C. ATTN: Code 811
38	Commandant, U.S. Army Ordnance and Guided Missile School, Redstone Arsenal, Ala.	82-84	Chief, Bureau of Naval Weapons, D/N, Washington 25, D.C. ATTN: DLI-3
39	Commanding General, Chemical Corps Training Comd., Ft. McClellan, Ala.		
40	Commandant, USA Signal School, Ft. Monmouth, N.J.		
41	Commandant, USA Transport School, Ft. Eustis, Va. ATTN: Security and Info. Off.		
42	Commanding General, The Engineer Center, Ft. Belvoir, Va. ATTN: Asst. Cmdt, Engr. School		
43	Commanding General, Army Medical Service School, Brooke Army Medical Center, Ft. Sam Houston, Tex.		

86	Chief, Bureau of Medicine and Surgery, D/N, Washington 25, D.C. ATTN: Special Wpns. Def. Div.	140	Commander, Air Defense Command, Ent AFB, Colorado. ATTN: Operations Analysis Section, AD-10
87	Chief, Bureau of Ordnance, D/N, Washington 25, D.C.	141	Commander, Hq. Air Research and Development Command, Andrews AFB, Washington 25, D.C. ATTN: RDRWA
87	Chief, Bureau of Ships, D/N, Washington 25, D.C. ATTN: Code 433	141	Commander, Air Force Ballistic Missile Div. Hq. ARDC, Air Force Unit Post Office, Los Angeles 45, Calif. ATTN: WDSOC
88	Chief, Bureau of Yards and Docks, D/N, Washington 25, D.C. ATTN: D-440	143-144	Commander, AF Cambridge Research Center, L. G. Hanscom Field, Bedford, Mass. ATTN: CRQST-2
89	Director, U.S. Naval Research Laboratory, Washington 25, D.C. ATTN: Mrs. Katherine E. Cass	145-148	Commander, Air Force Special Weapons Center, Kirtland AFB, Albuquerque, N. Mex. ATTN: Tech. Info. & Intel. Div.
90-91	Commander, U.S. Naval Ordnance Laboratory, White Oak, Silver Spring 19, Md.	150-151	Director, Air University Library, Maxwell AFB, Ala.
91	Director, Material Lab. (Code 900), New York Naval Shipyard, Brooklyn 1, N.Y.	152	Commander, Lovry Technical Training Center (TW), Lovry AFB, Denver, Colorado.
92	Commanding Officer and Director, Navy Electronics Laboratory, San Diego 58, Calif.	153	Commandant, School of Aviation Medicine, USAF, Aerospace Medical Center (ATC) Brooks Air Force Base, Tex. ATTN: Col. G. L. Bekhaus
92-93	Commanding Officer, U.S. Naval Radiological Defense Laboratory, San Francisco, Calif. ATTN: Tech. Info. Div.	154	Commander, 1009th Sp. Wpns. Squadron, Hq. USAF, Washington 25, D.C.
93	Commanding Officer and Director, U.S. Naval Civil Engineering Laboratory, Port Hueneue, Calif. ATTN: Code L31	155-156	Commander, Wright Air Development Center, Wright-Patterson AFB, Dayton, Ohio. ATTN: WCACT (For WCO61)
100	Superintendent, U.S. Naval Academy, Annapolis, Md.	157-158	Director, USAF Project RAND, VIA: USAF Liaison Office, The RAND Corp., 1700 Main St., Santa Monica, Calif.
101	Commanding Officer, U.S. Naval Schools Command, U.S. Naval Station, Treasure Island, San Francisco, Calif.	159	Commander, Air Defense Systems Integration Div., L. G. Hanscom Field, Bedford, Mass. ATTN: SIDE-S
101	President, U.S. Naval War College, Newport, Rhode Island	160	Commander, Air Technical Intelligence Center, USAF, Wright-Patterson AFB, Ohio. ATTN: AFCIN-4EIA, Library
102	Superintendent, U.S. Naval Postgraduate School, Monterey, Calif.	161	Assistant Chief of Staff, Intelligence, Hq. USAF, APO 633, New York, N.Y. ATTN: Directorate of Air Targets
103	Officer-in-Charge, U.S. Naval School, CEC Officers, U.S. Naval Construction Bn. Center, Port Hueneue, Calif.	162	Commander, Alaskan Air Command, APO 942, Seattle, Washington. ATTN: AACT
103	Commanding Officer, Nuclear Weapons Training Center, Atlantic, U.S. Naval Base, Norfolk 11, Va. ATTN: Nuclear Warfare Dept.	163	Commander-in-Chief, Pacific Air Forces, APO 953, San Francisco, Calif. ATTN: PFCIE-MB, Base Recovery
104	Commanding Officer, Nuclear Weapons Training Center, Pacific, Naval Station, San Diego, Calif.		OTHER DEPARTMENT OF DEFENSE ACTIVITIES
107	Commanding Officer, U.S. Naval Damage Control Tng. Center, Naval Base, Philadelphia 12, Pa. ATTN: ABC Defense Course	164	Director of Defense Research and Engineering, Washington 25, D.C. ATTN: Tech. Library
108	Commanding Officer, Air Development Squadron 5, VX-5, Crane Lake, Calif.	165	Executive Secretary, Military Liaison Committee, Department of Defense, Washington 25, D.C.
109	Commanding Officer, U.S. Naval Medical Research Institute, National Naval Medical Center, Bethesda, Md.	166	Director, Weapons Systems Evaluation Group, Room 1E550, The Pentagon, Washington 25, D.C.
110	Commander, U.S. Naval Ordnance Test Station, China Lake, Calif.	167	Commandant, The Industrial College of The Armed Forces, Ft. McNair, Washington 25, D.C.
111	Officer-in-Charge, U.S. Naval Supply Research and Development Facility, Naval Supply Center, Bayonne, N.J.	168	Commandant, Armed Forces Staff College, Norfolk 11, Va. ATTN: Library
112	Commander-in-Chief, U.S. Atlantic Fleet, U.S. Naval Base, Norfolk 11, Va.	169-172	Chief, Defense Atomic Support Agency, Washington 25, D.C. ATTN: Document Library
113	Commandant, U.S. Marine Corps, Washington 25, D.C. ATTN: Code A03H	173	Commander, Field Command, DASA, Sandia Base, Albuquerque, N. Mex.
114	Director, Marine Corps Landing Force, Development Center, MCS, Quantico, Va.	174	Commander, Field Command, DASA, Sandia Base, Albuquerque, N. Mex. ATTN: FCTG
115	Chief, Bureau of Ships, D/N, Washington 25, D.C. ATTN: Code 372	175-176	Commander, Field Command, DASA, Sandia Base, Albuquerque, N. Mex. ATTN: FCWT
116	Commanding Officer, U.S. Naval CIC School, U.S. Naval Air Station, Glynnco, Brunswick, Ga.	177	Commander-in-Chief, Strategic Air Command, Offutt AFB, Neb. ATTN: OAMS
117	Chief of Naval Operations, Department of the Navy, Washington 25, D.C. ATTN: OP-0955	178	Commandant, US Coast Guard, 1300 E. St., N.W., Washington 25, D.C. ATTN: Cdr. E. E. Kolkhorst
118-120	Chief, Bureau of Naval Weapons, Navy Department, Washington 25, D.C. ATTN: RRLC	179	Commander-in-Chief, EUCOM, APO 128, New York, N.Y.
121	Commander-in-Chief, U.S. Pacific Fleet, Fleet Post Office, San Francisco, Calif.	180	Commander-in-Chief, Pacific, c/o Fleet Post Office, San Francisco, Calif.
	AIR FORCE ACTIVITIES	181	U.S. Documents Officer, Office of the United States National Military Representative - SBAFE, APO 55, New York, N.Y.
122	Air Force Technical Application Center, Hq. USAF, Washington 25, D.C.	182	SAC (SUP3.1), Offutt AFB, Nebr.
123	Deputy Chief of Staff, Operations, Hq. USAF, Washington 25, D.C. ATTN: APOOF		ATOMIC ENERGY COMMISSION ACTIVITIES
124	Hq. USAF, ATTN: Operations Analysis Office, Office, Vice Chief of Staff, Washington 25, D.C.	183-185	U.S. Atomic Energy Commission, Technical Library, Washington 25, D.C. ATTN: For IMA
125	Director of Civil Engineering, Hq. USAF, Washington 25, D.C. ATTN: AFOCE	186-187	Los Alamos Scientific Laboratory, Report Library, P.O. Box 1663, Los Alamos, N. Mex. ATTN: Helen Redman
126-136	Hq. USAF, Washington 25, D.C. ATTN: AFCIN-3DL, Rm 4B137, Pentagon	188-192	Sandia Corporation, Classified Document Division, Sandia Base, Albuquerque, N. Mex. ATTN: E. J. Smyth, Jr.
137	Director of Research and Development, DCS/D, Hq. USAF, Washington 25, D.C. ATTN: Guidance and Weapons Div.	193-202	University of California Lawrence Radiation Laboratory, P.O. Box 808, Livermore, Calif. ATTN: Clovis G. Craig
138	The Surgeon General, Hq. USAF, Washington 25, D.C. ATTN: Bio.-Def. Pre. Med. Division	203	Weapon Data Section, Office of Technical Information Extension, Oak Ridge, Tenn.
139	Commander, Tactical Air Command, Langley AFB, Va. ATTN: Doc. Security Branch	204-235	Office of Technical Information Extension, Oak Ridge, Tenn. (Surplus)

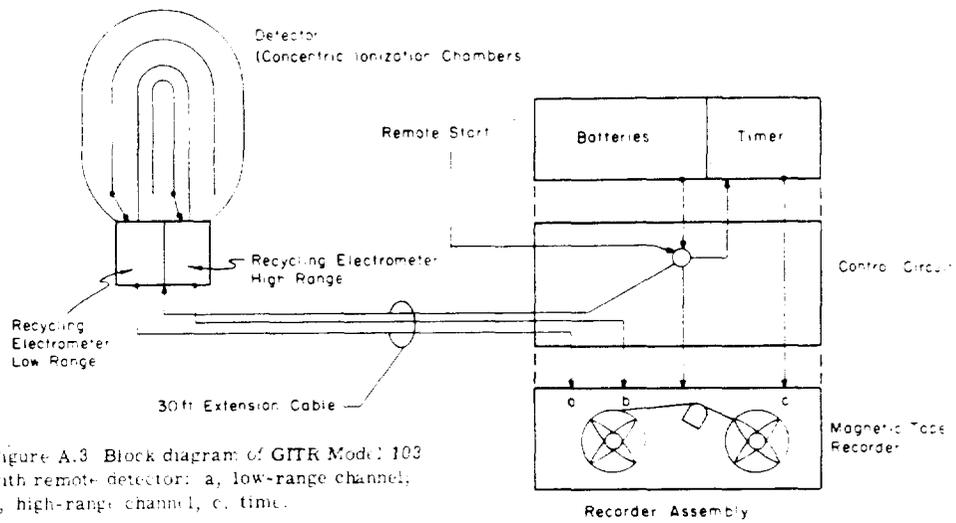


Figure A.3 Block diagram of GTR Model 103 with remote detector: a, low-range channel; b, high-range channel; c, time.

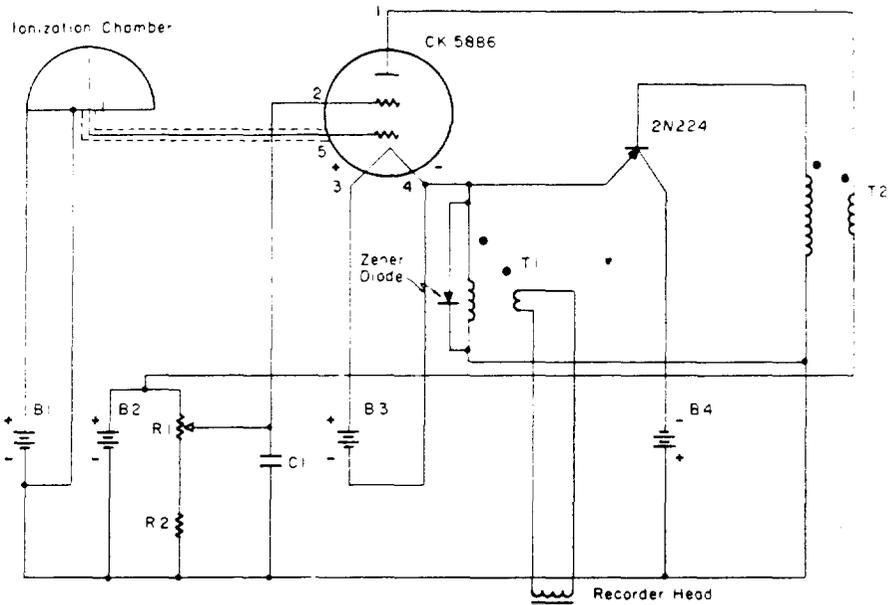


Figure A.4 Simplified schematic diagram of GTR Model 103 recycling electrometer.

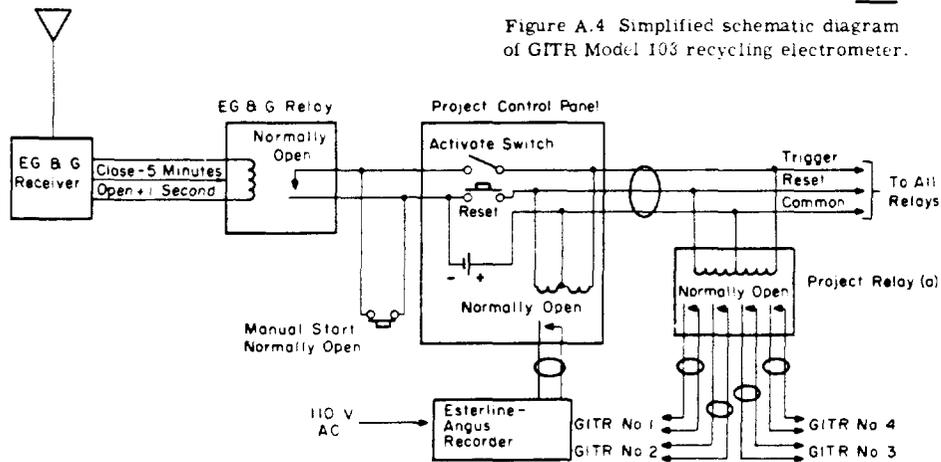


Figure A.5 Block diagram of GTR triggering system for target ships. Each relay starts four GTR instruments (reference LBNS drawing No. 474 401 1586967 for details).

## Appendix B

### GTR CALIBRATION

#### B.1 BIASED-FIELD CALIBRATIONS

All instruments were initially calibrated at NRDL with  $\text{Co}^{60}$  sources accurate to within 3 percent. All calibrations were made with a standard orientation: the longitudinal axes of the detector and the radiation beam were parallel, and the electrometer housing faced away from the source. In this orientation, dose increments of 0.243 mr and 0.243 r were established for the low- and high-range chambers, respectively. The linearity of the detector had been checked over a wide range of gamma intensities and is shown in Figures B.1 and B.2.

To assure optimum reliability and accuracy in the data, each detector was recalibrated in the field, before and after each shot, with the 120-curie  $\text{Cs}^{137}$  source installed in the project's instrumentation trailer. This source was standardized to the  $\text{Co}^{60}$  sources by means of the Victoreen 70-A r-meter and various calibrated chambers. To assure maximum reproducibility of calibration, a jig was fabricated to control positioning of all detectors in the radiation beam. For personnel protection, the beam was directed vertically through the roof of the trailer. A calibration radiation field of 56.4 r/hr was used for the adjustment of the detector output-pulse periods to 0.016 and 15.5 seconds for the low-range and the high-range channels, respectively. The low-range-channel pulse period of 0.016 second (instead of the expected value of 0.0155 second to give 0.243 mr) compensated for the 0.0005-second recycling time of the circuit. The calibration radiation field was too low to require a similar compensation for the high-range chamber.

It was estimated that all field calibrations were made with a precision of about  $\pm 2$  percent. Upon recalibration following an event, the random shifts in calibration were noted to be about  $\pm 3$  percent. Evaluation of all phases of instrument operation indicated that the relative precision of almost all detectors was about  $\pm 7$  percent throughout an event. However, it was known that the detector orientation used for calibration, and chosen because it assured reproducibility, biased the results because of the nonuniform directional response of the detectors. Figures B.3 and B.4 show the results of pretest studies of energy response and directional response characteristics.

#### B.2 CORRECTIONS FOR CALIBRATION BIAS

After Operation Hardtack, a more-extensive investigation of GTR directional characteristics as a function of energy was undertaken at NRDL for three conditions: (1) detector in the aluminum jacket, representing interior GTR stations; (2) detector inside the aluminum drum, representing exterior GTR stations; and (3) detector mounted inside the recorder case. Figure B.5 and Tables B.1 through B.6 show the results in relationship to the biased field-calibration condition. The actual responses of the shielded detectors (simulating the station mountings) to the several monoenergetic gamma-radiation beams for various detector orientations were divided by the responses of the unshielded detectors to  $\text{Cs}^{137}$  radiation beamed at the top of the detector (the biased field-calibration responses).

The directional responses indicated above were used to calculate integrated responses to four idealized radiation-source geometries: (1) horizontal radiation incidence, simulating remote pretransit radiation; (2) hemispherical radiation source above station, simulating the transit phase; (3) spherical radiation source around station, simulating interior stations affected by radiation from both the overhead decks and adjacent water; and (4) radiation source presenting solid angle of  $1.7-\pi$  steradians below station, simulating exterior stations exposed only to contaminated decks and/or adjacent water. Figures B.6 through B.9 show these integrated responses in relationship to the biased field-calibration condition. However, these values apply only for monoenergetic radiation sources.

In the absence of measured gamma-energy spectra for these shots, the sensitivity of calculated correction factors to various assumed spectra was investigated. Six un-degraded energy spectra for various times after fission were considered: 9-second and 6.8-minute spectra from Reference 10; a 31-minute spectrum from Reference 12; 1.1- and 5.2-hour spectra from Reference 13; and a 9-hour spectrum from

Reference 14. Degradation of these six spectra by penetration of about 1 inch of steel was also estimated as follows.

An unattenuated gamma-energy spectrum (broken into  $n$  energy intervals) has an average energy flux of  $U_j$  Mev/cm<sup>2</sup>-sec for the  $j$ th energy interval  $D_j$  Mev wide. After attenuation by  $x$ -cm. of steel the energy flux from the  $j$ th energy interval has been reduced to  $U_j B_j \exp(-ux)$ , assuming plane monodirectional radiation for simplicity; where  $B_j$  is an energy-buildup factor determined by cross-interpolation in Reference 11, and  $u$  is the total absorption coefficient per centimeter of steel (at the energy representative of the  $j$ th interval) determined from Reference 15. To reduce the computational complexity, it was assumed that (for energy originating in the  $j$ th energy interval) the attenuated energy flux per unit energy interval became uniformly distributed over the interval  $\sum_{i=1}^j D_i$ . This assumption biases the results somewhat by over-emphasizing the low energies (Figure B.10). The energy flux for the  $p$ th intervals ( $p \leq j$ ), originating from the  $j$ th interval, is represented by

$$\left( D_p / \sum_{i=1}^j D_i \right) U_j B_j \exp(-ux) \tag{B.1}$$

Summing all of the attenuated and degraded energy flux ( $A_p$ ) for the  $p$ th energy interval, originating from all intervals that can contribute to it, results in

$$A_p = D_p \sum_{j=p}^{j=n} \left\{ \left[ U_j B_j \exp(-ux) \right] / \sum_{i=1}^j D_i \right\} \tag{B.2}$$

An example of the effect of this assumed degradation on one of the assumed gamma-energy spectra is presented in Figure B.11.

The energy flux for each of the energy intervals of the twelve energy spectra (six original and six degraded) was converted to an equivalent dose rate by using conversion factors determined from Reference 15. These dose rates were used to calculate percent dose-rate contributions from energy intervals representative of the energies at which the integrated detector responses had been calculated (Tables B.7 and B.8). These percentages were used as weighting factors applied to the data of Figures B.6 through B.9, thereby obtaining the overall responses to the assumed spectra in relationship to the biased-field-calibration. GTR bias-correction factors were obtained by averaging the reciprocals of the weighted integrated responses to the assumed energy spectra for the various idealized radiation-source geometries (Table B.9).

TABLE B.1 DIRECTIONAL RESPONSE OF LOW-RANGE  
GITR DETECTOR (INSIDE 0.13-INCH ALUMINUM  
DRUM) TO BEAMS OF VARIOUS RADIATIONS

Values are comparisons to response of unshielded detector to  $Cs^{137}$  radiation beamed at top of detector (0 degree orientation). Detector and drum were rotated in longitudinal plane about center of detector. Response is symmetrical about longitudinal axis of detector.

Detector Orientation	70-kev X-rays	120-kev X-rays	180-kev X-rays	$Cs^{137}$	$Co^{60}$
deg					
0	1.071	0.894	0.911	0.949	1.091
22	1.009	0.930	0.950	0.958	1.124
45	1.064	0.992	0.993	0.953	1.129
67	1.211	1.095	1.046	0.956	1.128
90	1.265	1.124	1.057	0.947	1.132
101	1.242	1.114	1.040	0.936	1.126
112	1.170	1.058	1.000	0.912	1.107
123	1.011	0.965	0.937	0.892	1.087
135	0.834	0.840	0.856	0.854	1.051
146	0.609	0.693	0.701	0.796	0.988
157	0.473	0.317	0.571	0.507	0.666
180	0.212	0.292	0.368	0.501	0.751

TABLE B.2 DIRECTIONAL RESPONSE OF HIGH-RANGE  
GITR DETECTOR (INSIDE 0.13-INCH ALUMINUM  
DRUM) TO BEAMS OF VARIOUS RADIATIONS

Values are comparisons to response of unshielded detector to  $Cs^{137}$  radiation beamed at top of detector (0 degree orientation). Detector and drum were rotated in longitudinal plane about center of detector. Response is symmetrical about longitudinal axis of detector.

Detector Orientation	70-kev X-rays	120-kev X-rays	180-kev X-rays	$Cs^{137}$	$Co^{60}$
deg					
0	0.955	0.828	1.000	1.050	1.132
22	0.987	0.912	1.110	1.144	1.262
45	0.988	0.972	1.152	1.146	1.281
67	1.197	1.142	1.259	1.163	1.314
90	1.289	1.217	1.309	1.171	1.336
101	1.245	1.222	1.296	1.167	1.344
112	1.189	1.199	1.277	1.162	1.350
123	1.034	1.089	1.173	1.117	1.303
135	0.823	0.954	1.041	1.042	1.255
146	0.684	0.826	0.893	0.943	1.182
157	0.444	0.774	0.763	0.848	0.720
180	0.125	0.228	0.252	0.297	0.530

**CONFIDENTIAL**

TABLE B.3 DIRECTIONAL RESPONSE OF LOW-RANGE GTR DETECTOR  
(WITH 0.13-INCH ALUMINUM JACKET) TO BEAMS OF  
VARIOUS RADIATIONS

Values are comparisons to response of unshielded detector to Cs<sup>137</sup> radiation beamed at top of detector (0 degree orientation). Detector was rotated about its center in longitudinal plane. Response is symmetrical about longitudinal axis of detector.

Detector Orientation deg	70-kev X-rays	120-kev X-rays	180-kev X-rays	Co <sup>60</sup>	Detector Orientation deg	Cs <sup>137</sup>
0	1.012	0.902	0.884	1.058	0	0.958
					10	0.958
22	0.989	0.940	0.907	1.102	20	0.954
					30	0.952
45	1.030	1.000	0.957	1.115	40	0.954
					50	1.000
67	1.150	1.100	1.065	1.123	60	1.019
					70	1.015
90	1.211	1.157	1.015	1.120	80	1.018
					90	1.019
101	1.180	1.112	1.065	1.112	100	1.012
112	1.122	1.052	0.974	1.102	110	1.000
120	1.041	1.016	0.954	1.093	120	0.984
135	0.918	0.923	0.872	1.070	130	0.970
140	0.750	0.795	0.805	1.027	140	0.941
					150	0.884
157	0.582	0.639	0.666	0.953	160	0.788
					170	0.648
180	0.264	0.357	0.415	0.819	180	0.607

NOT AVAILABLE COPY

TABLE B.4 DIRECTIONAL RESPONSE OF HIGH-RANGE GTR DETECTOR  
(WITH 0.13-INCH ALUMINUM JACKET) TO BEAMS OF  
VARIOUS RADIATIONS

Values are comparisons to response of unshielded detector to Cs<sup>137</sup> radiation beamed at top of detector (0 degree orientation). Detector was rotated about its center in longitudinal plane. Response is symmetrical about longitudinal axis of detector.

Detector Orientation deg	70-kev X-rays	120-kev X-rays	180-kev X-rays	Co <sup>60</sup>	Detector Orientation deg	Cs <sup>137</sup>
0	0.907	0.826	0.952	1.090	0	0.968
					10	1.103
22	1.038	0.947	1.103	1.223	20	1.132
					30	1.176
45	1.023	0.976	1.145	1.250	40	1.192
					50	1.204
67	1.210	1.139	1.245	1.281	60	1.226
					70	1.240
90	1.295	1.213	1.285	1.301	80	1.257
					90	1.264
101	1.198	1.159	1.253	1.302	100	1.272
112	1.161	1.164	1.253	1.314	110	1.288
123	1.138	1.153	1.199	1.308	120	1.276
135	0.940	1.023	1.093	1.289	130	1.249
140	0.781	0.919	0.985	1.250	140	1.209
					150	1.111
157	0.709	0.814	0.854	1.133	160	0.911
					170	0.590
180	0.164	0.282	0.298	0.467	180	0.274

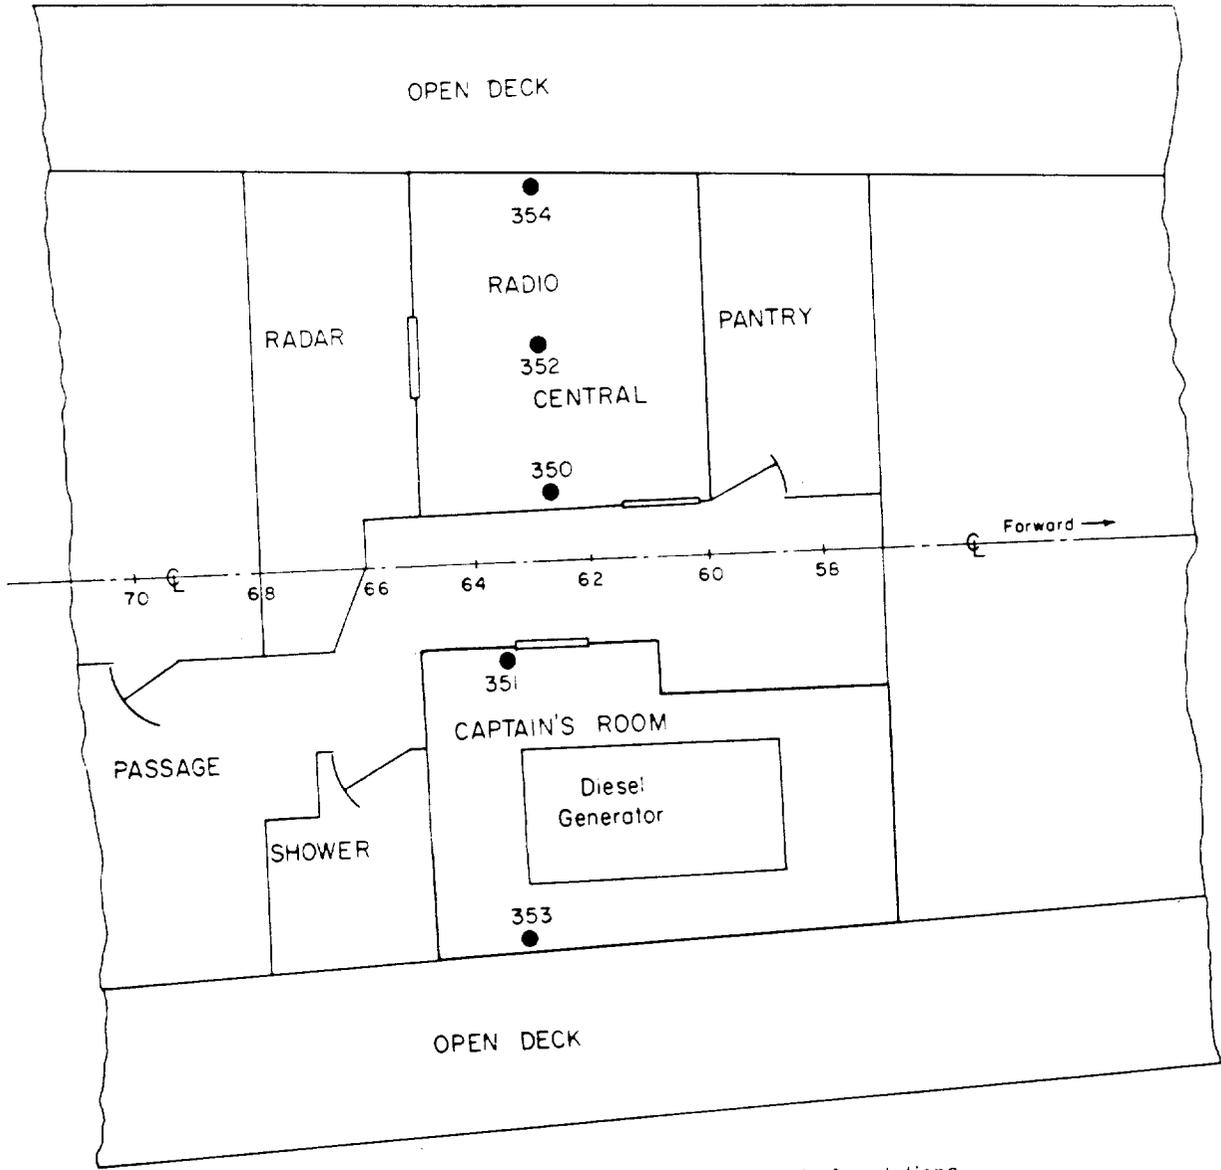


Figure C.5 Location and designation of film-badge stations in radio central (main deck) aboard target ships.

START AVAILABLE COPY


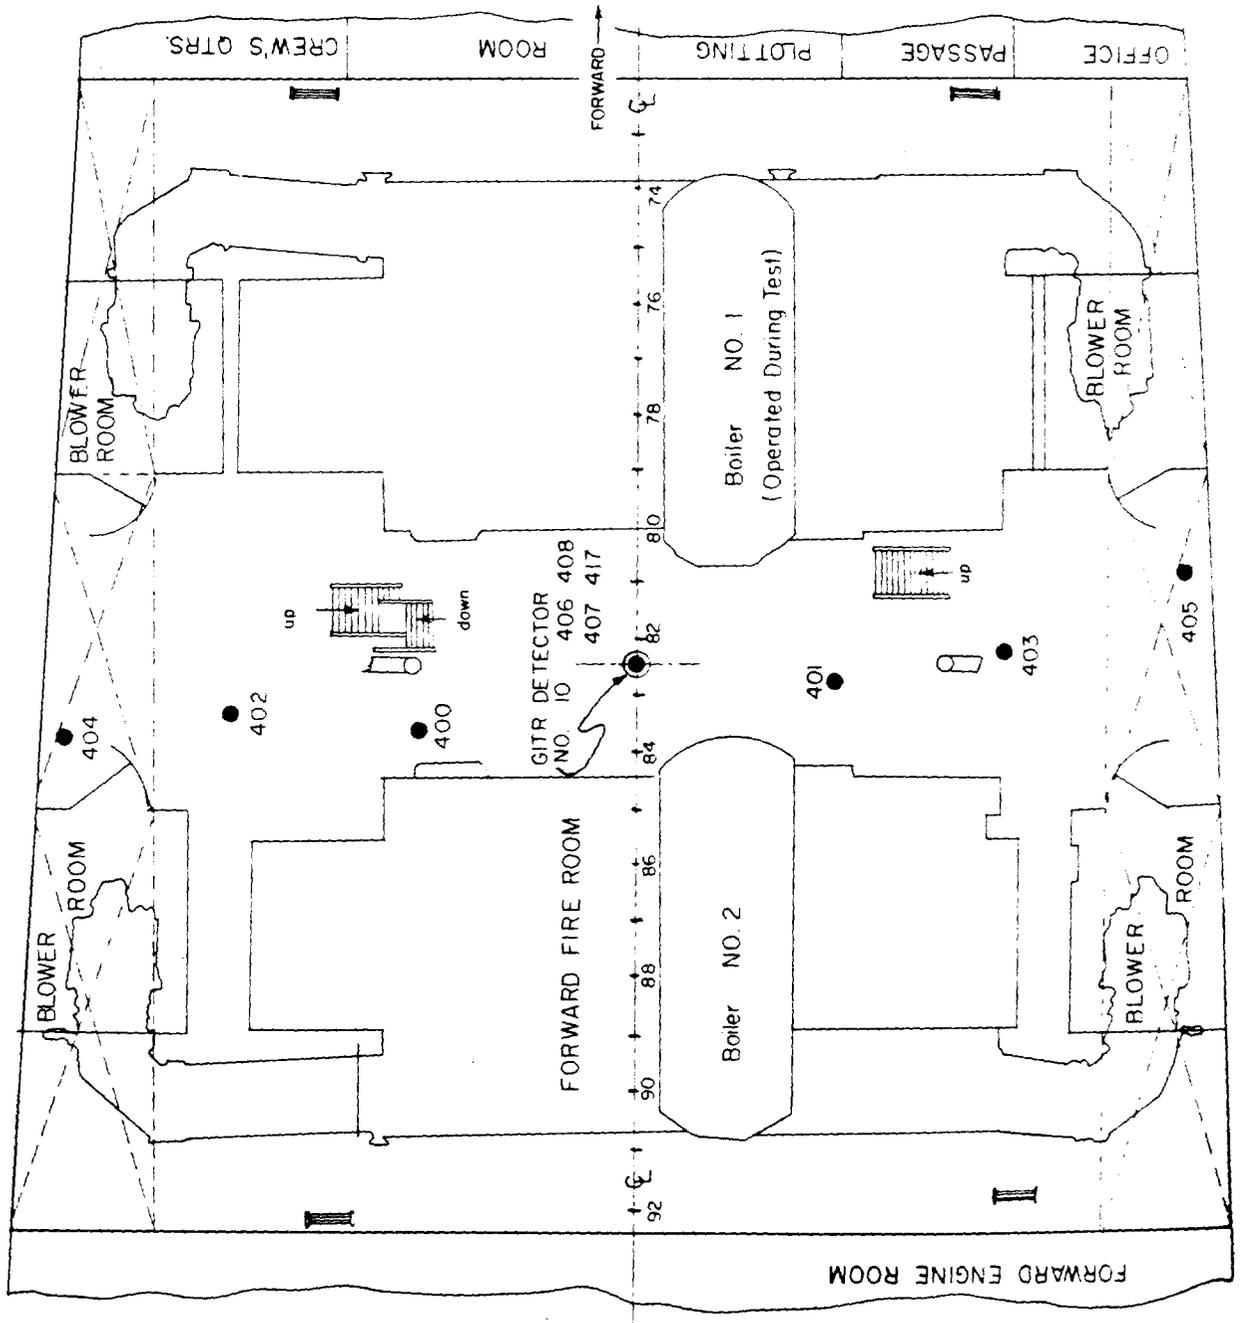


Figure C.6 Location and designation of film badge stations in forward fire room (upper level) also on target ships.

Figure C.8 Location and designation of film-badge stations in forward fireroom (upper level) aboard target ships.

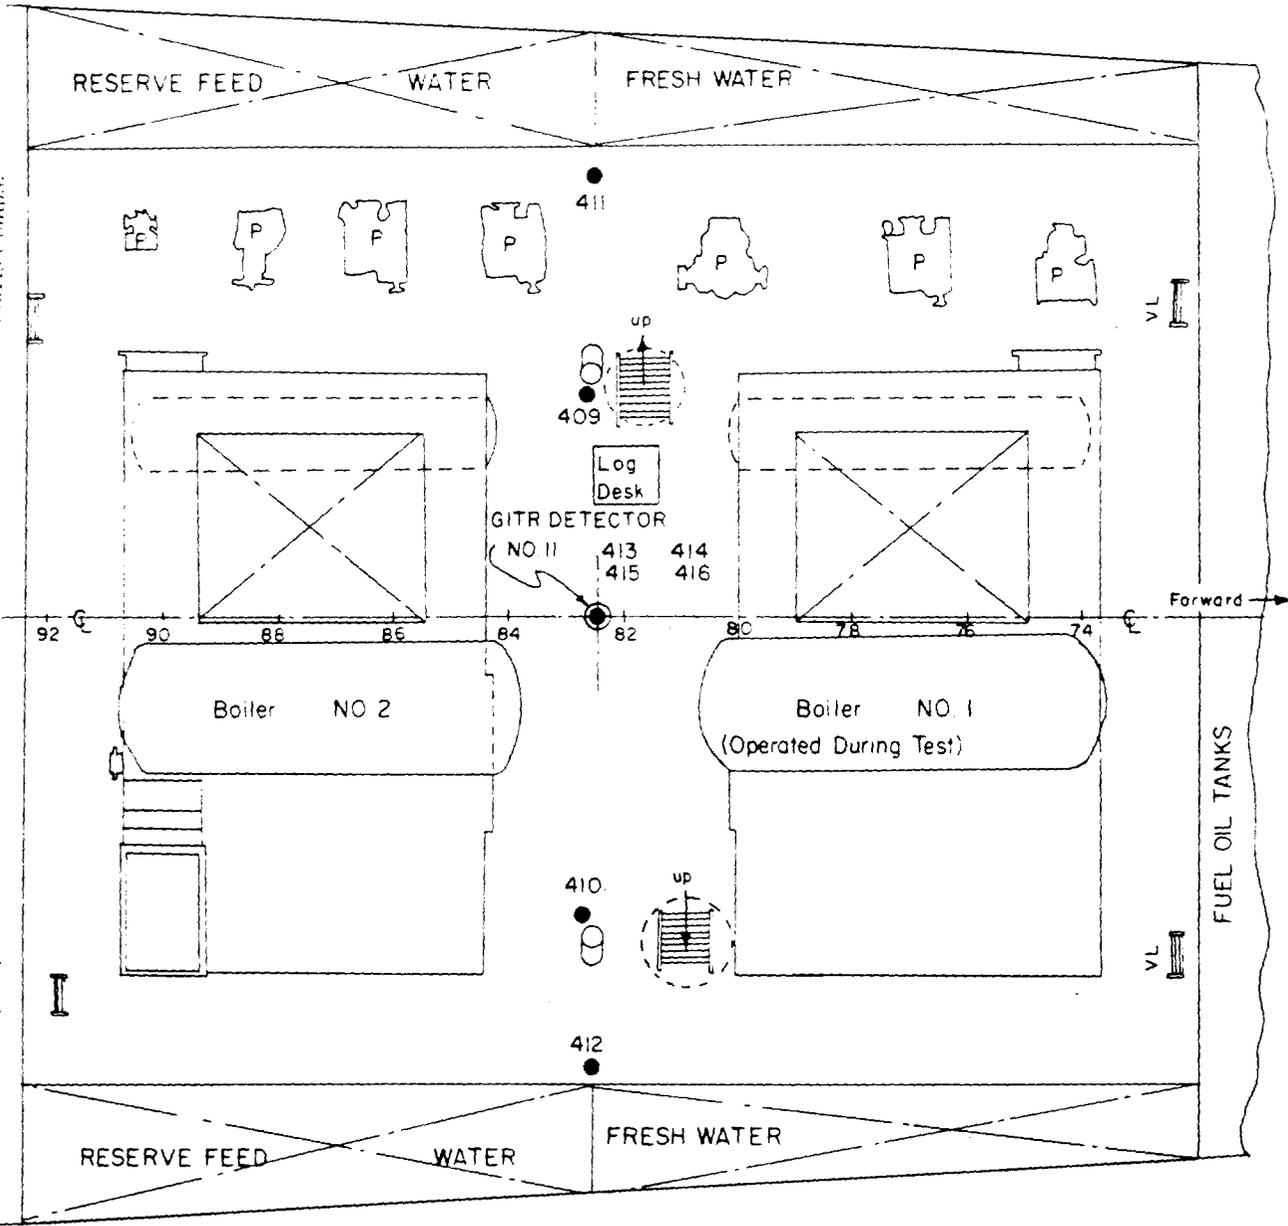

Note. Items Marked "P" are Pumps

Figure C.7 Location and designation of film-badge stations in forward fireroom (lower level) aboard target ships.

**BEST AVAILABLE COPY**



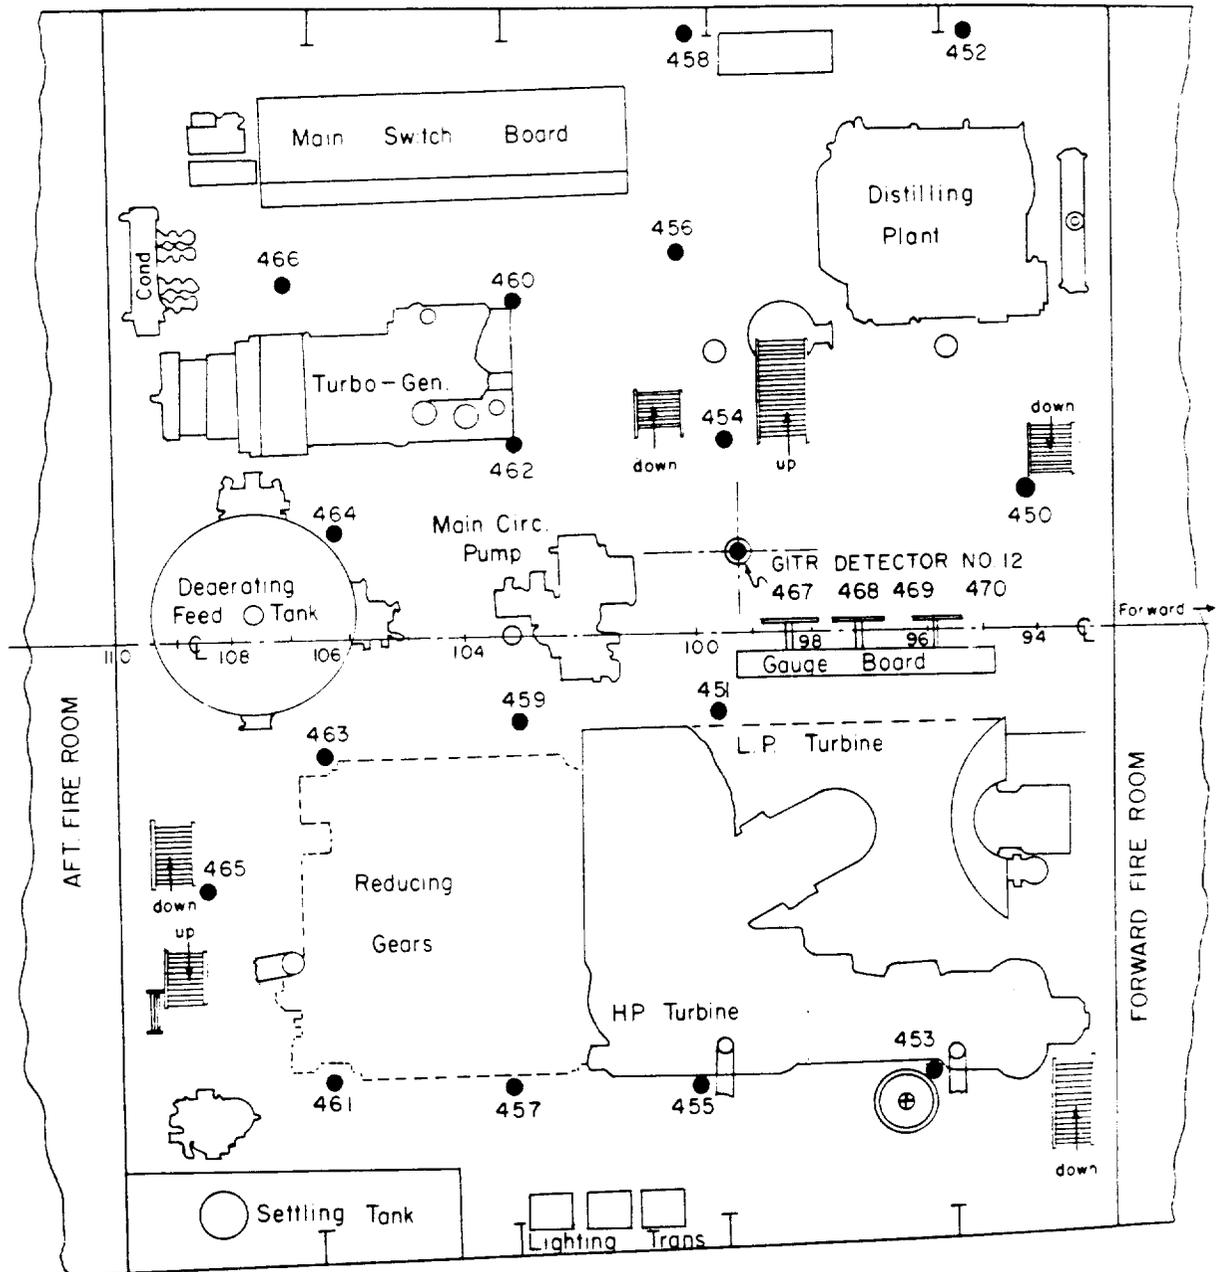


Figure C.8 Location and designation of film-badge stations in forward engine room (upper level) aboard target ships.

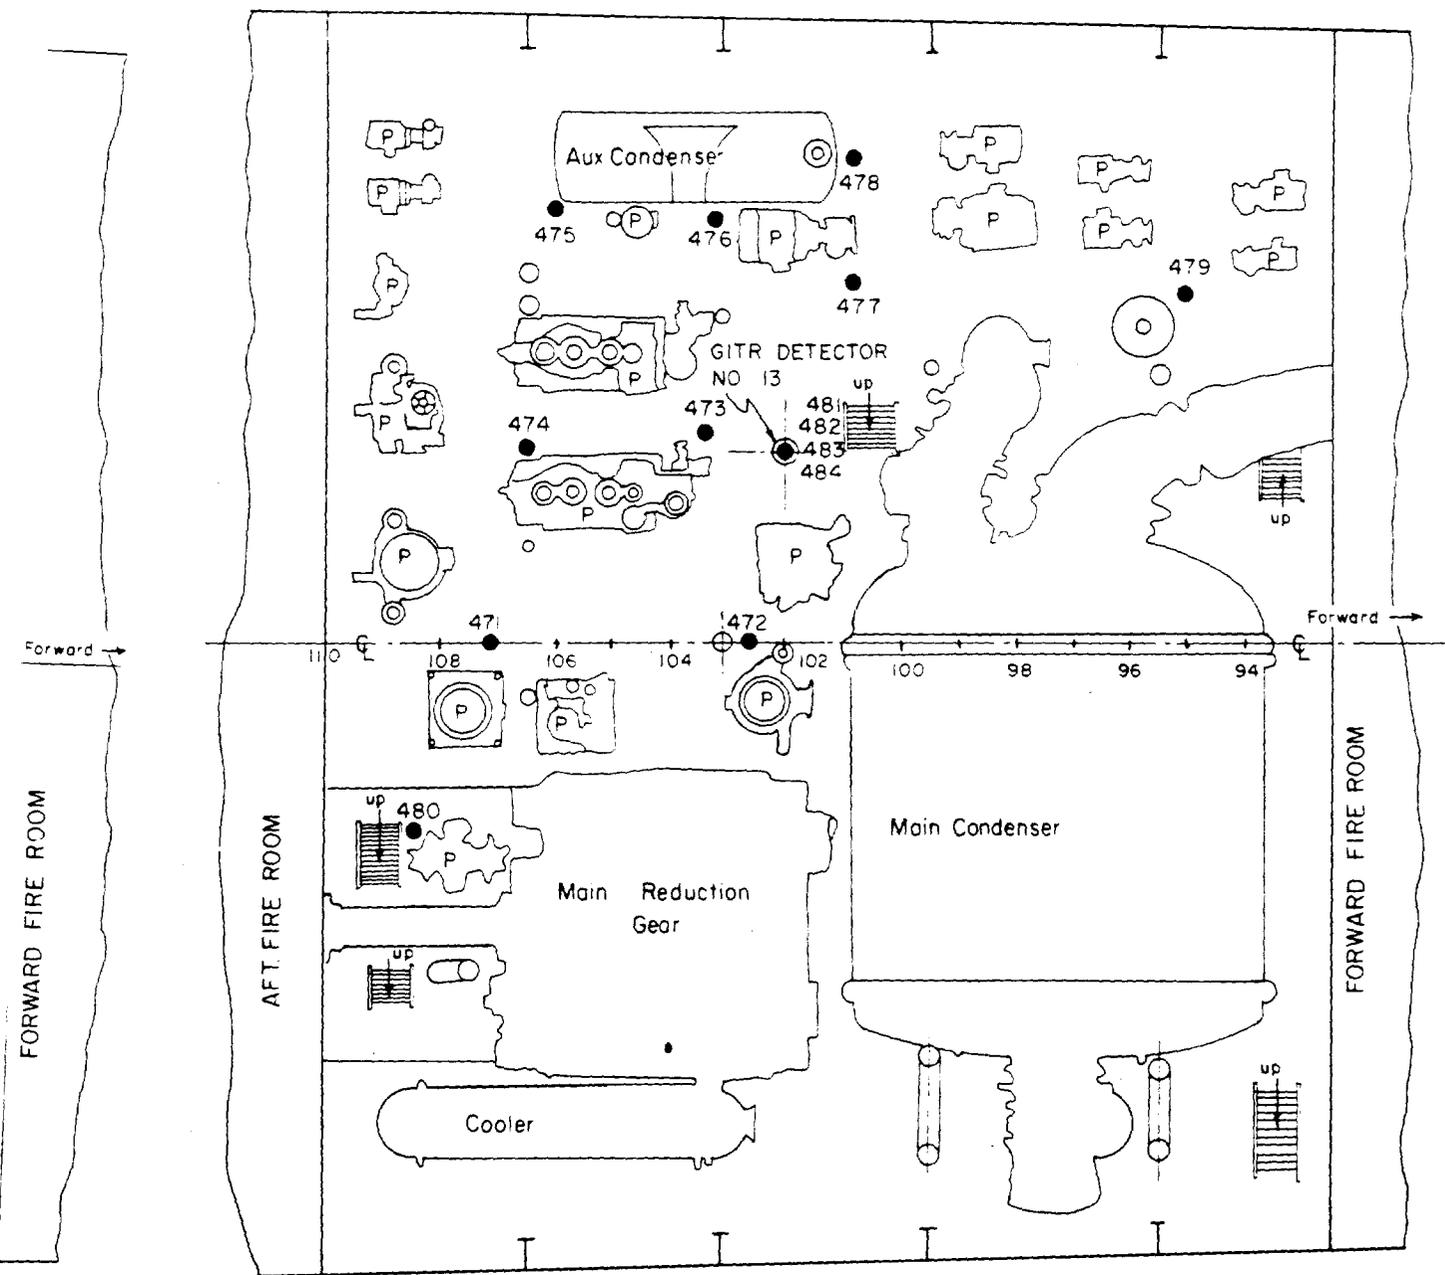

Note: Items Marked "P" are Pumps

Figure C.9 Location and designation of film-badge stations in forward engine room (lower level) aboard target ships.

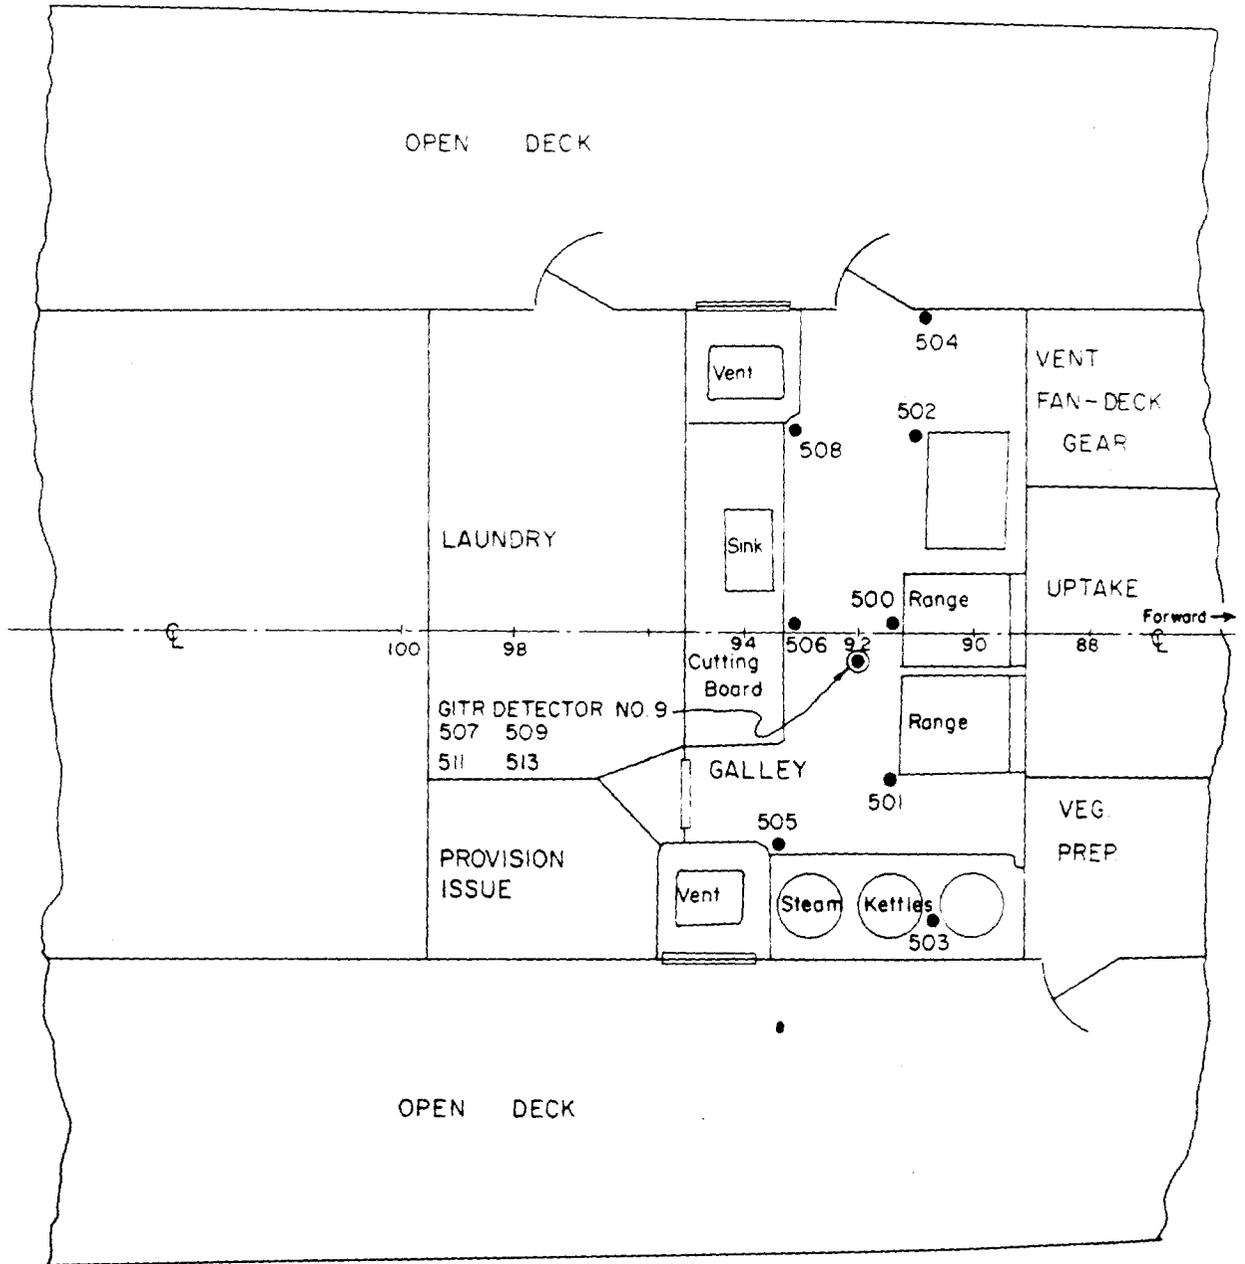

Note: DD 592 Galley Equipment Removed Prior to Tests.

Figure C.10 Location and designation of film-badge stations in galley (main deck) aboard target ships.


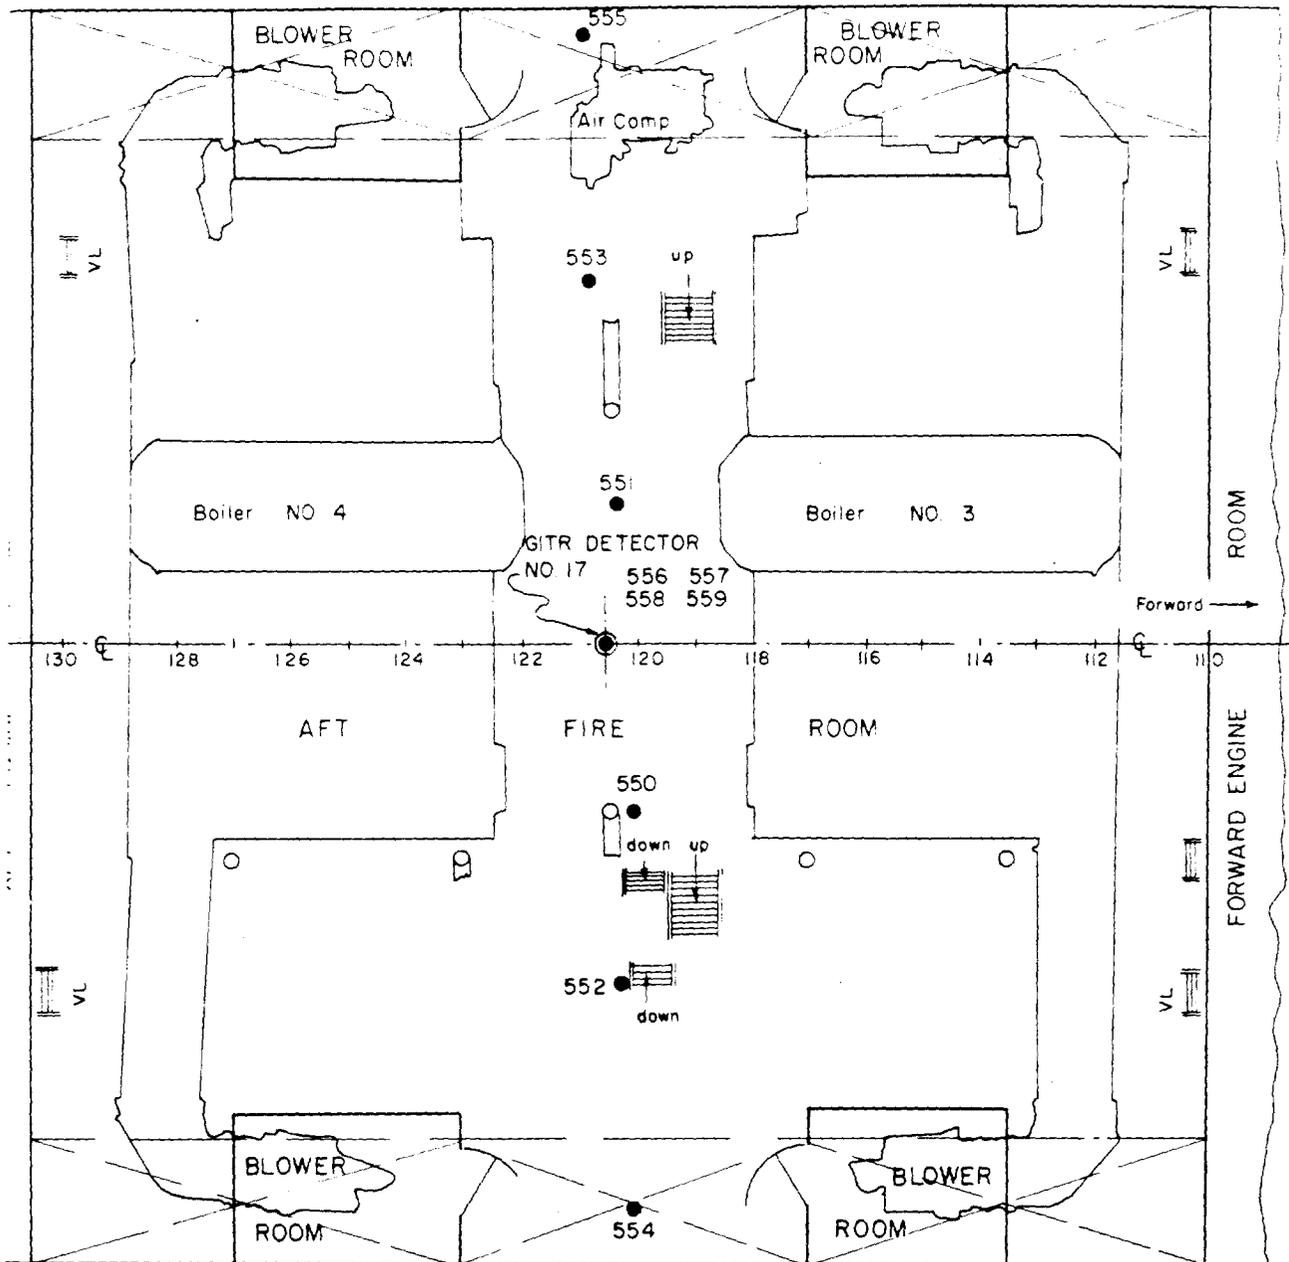


Figure C.11 Location and designation of film-badge stations in aft fireroom (upper level) aboard DD 592.

**BEST AVAILABLE COPY**

**CONFIDENTIAL**

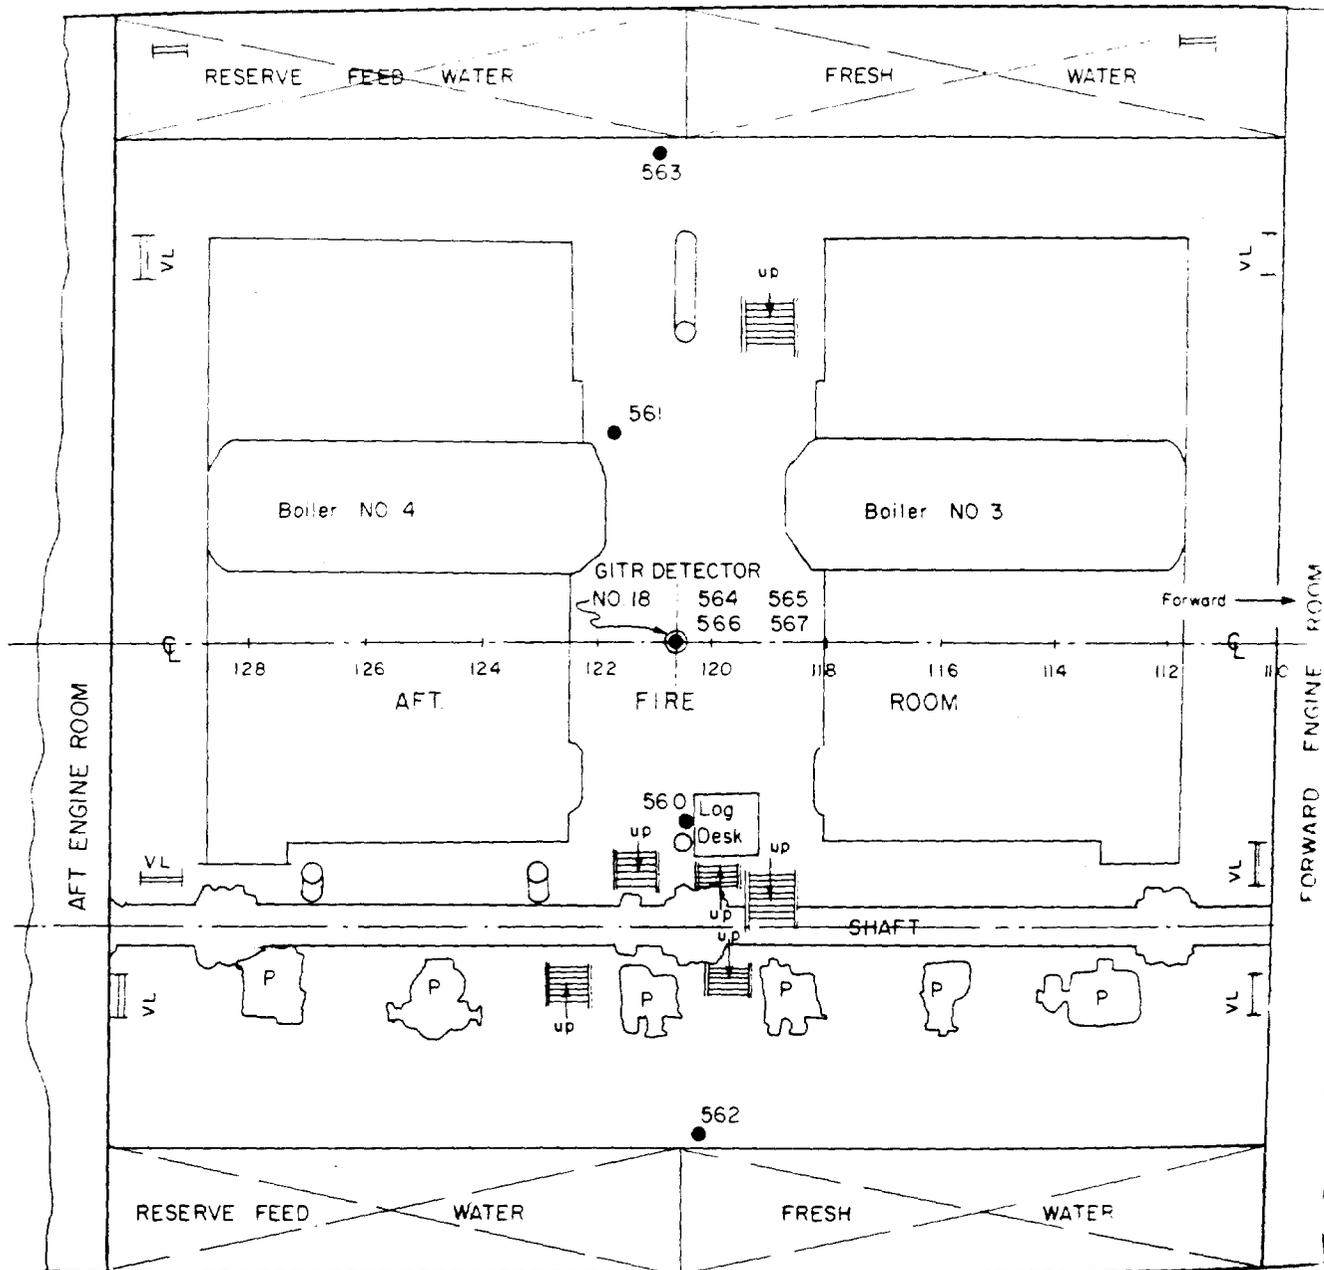


Note: Items Marked "P" are Pumps

Figure C.12 Location and designation of film-badge stations in aft fireroom (lower level) aboard DD 592.

**BEST AVAILABLE COPY**

**CONFIDENTIAL**

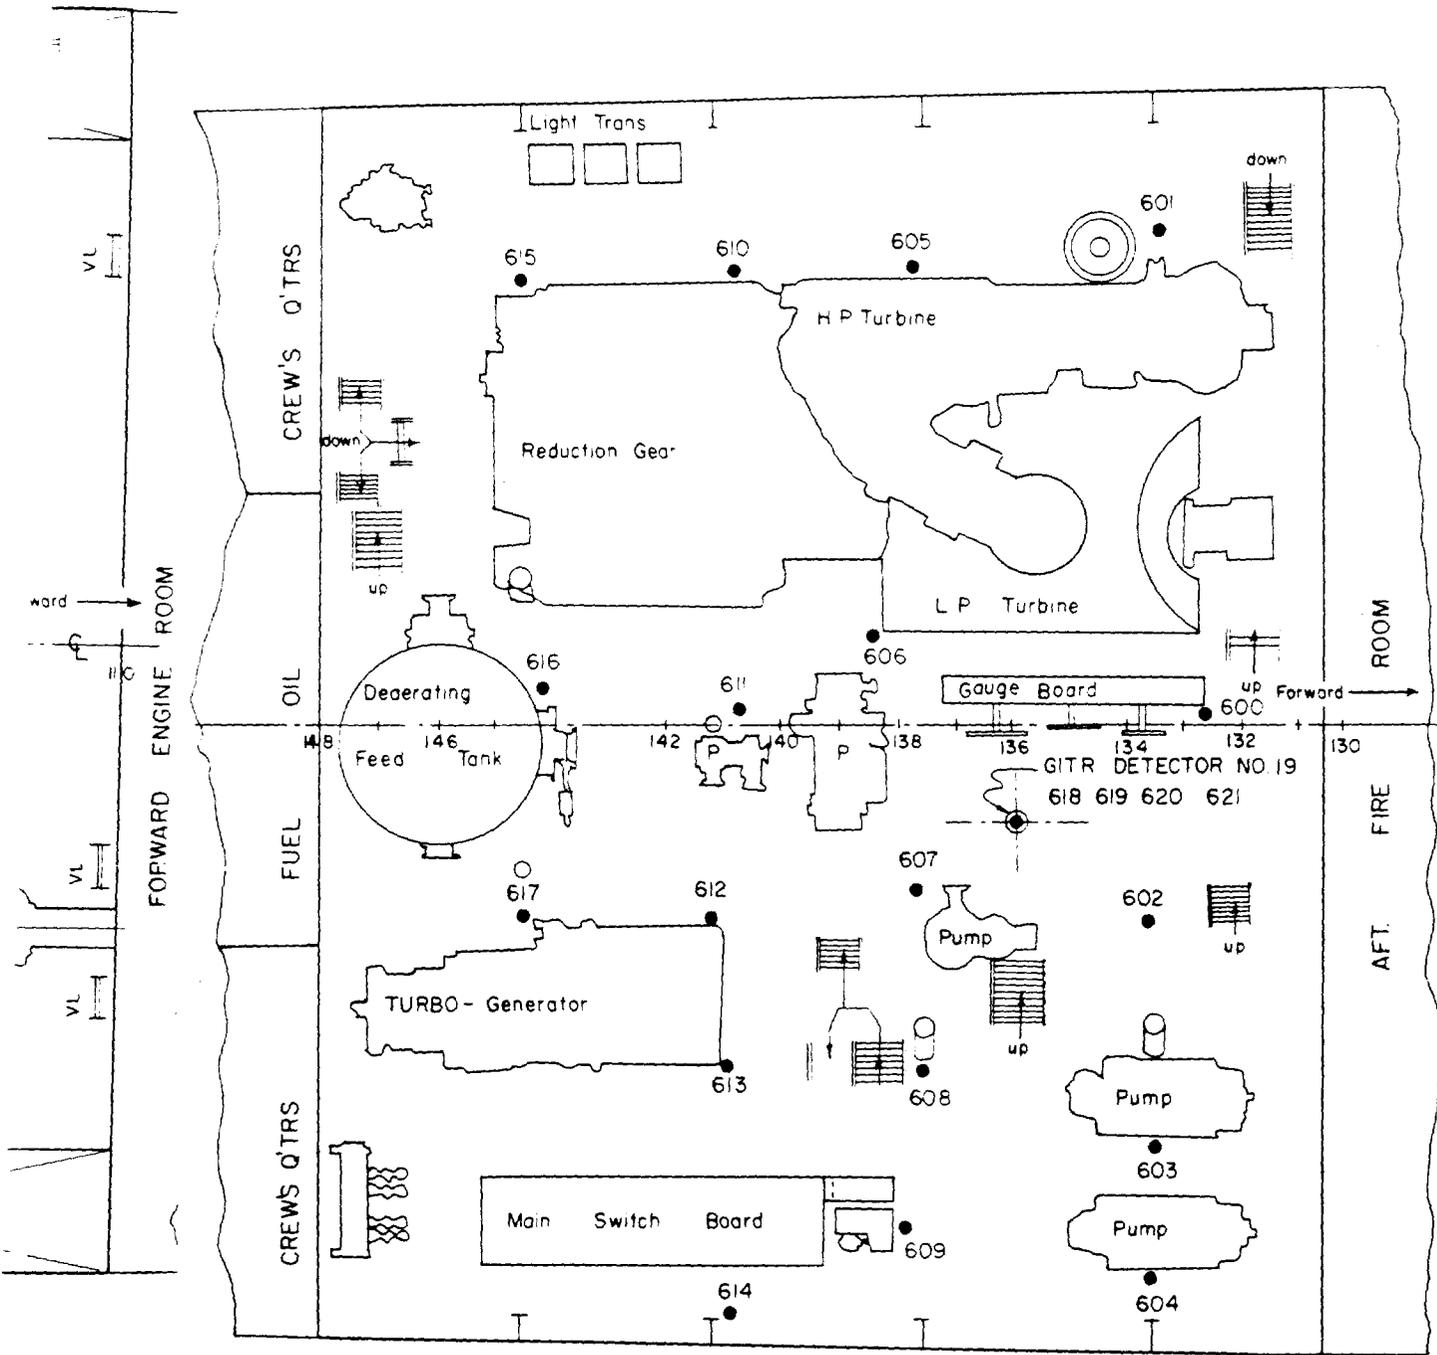


Note: Items Marked "P" are Pumps

Figure C.13 Location and designation of film-badge stations in aft engine room (upper level) aboard DD 592.

BEST AVAILABLE COPY

~~CONFIDENTIAL~~

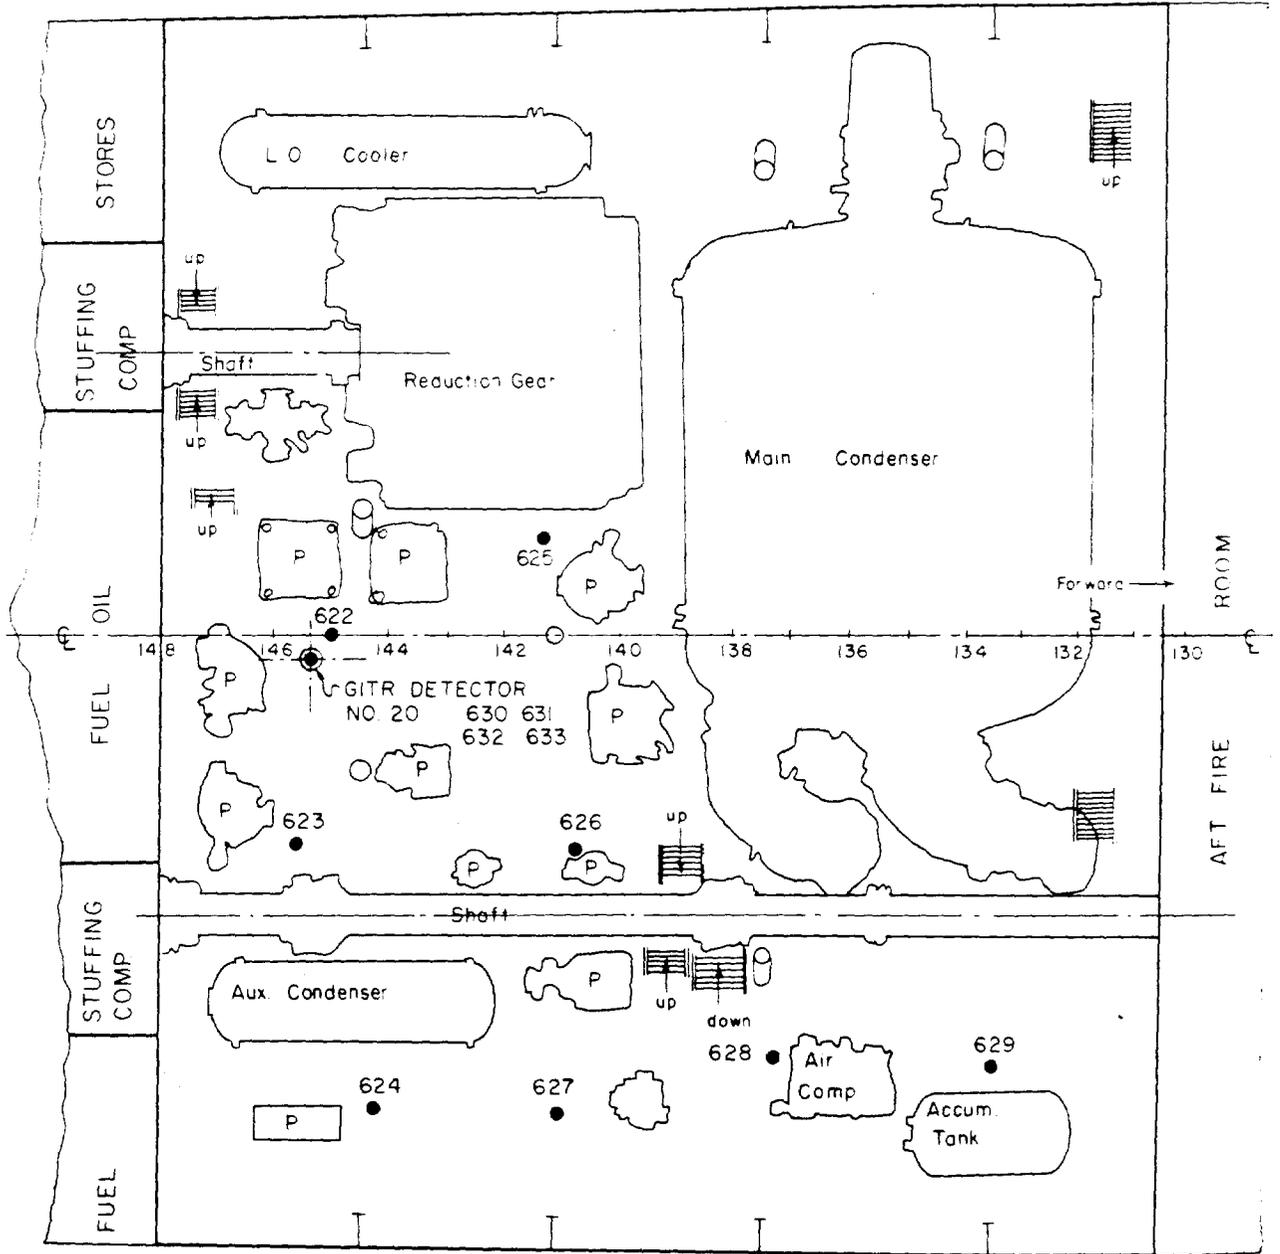

Note: Items Marked "P" are Pumps

Figure C.14 Location and designation of film-badge stations in aft engine room (lower level) aboard DD 592.

BEST AVAILABLE COPY

CONFIDENTIAL

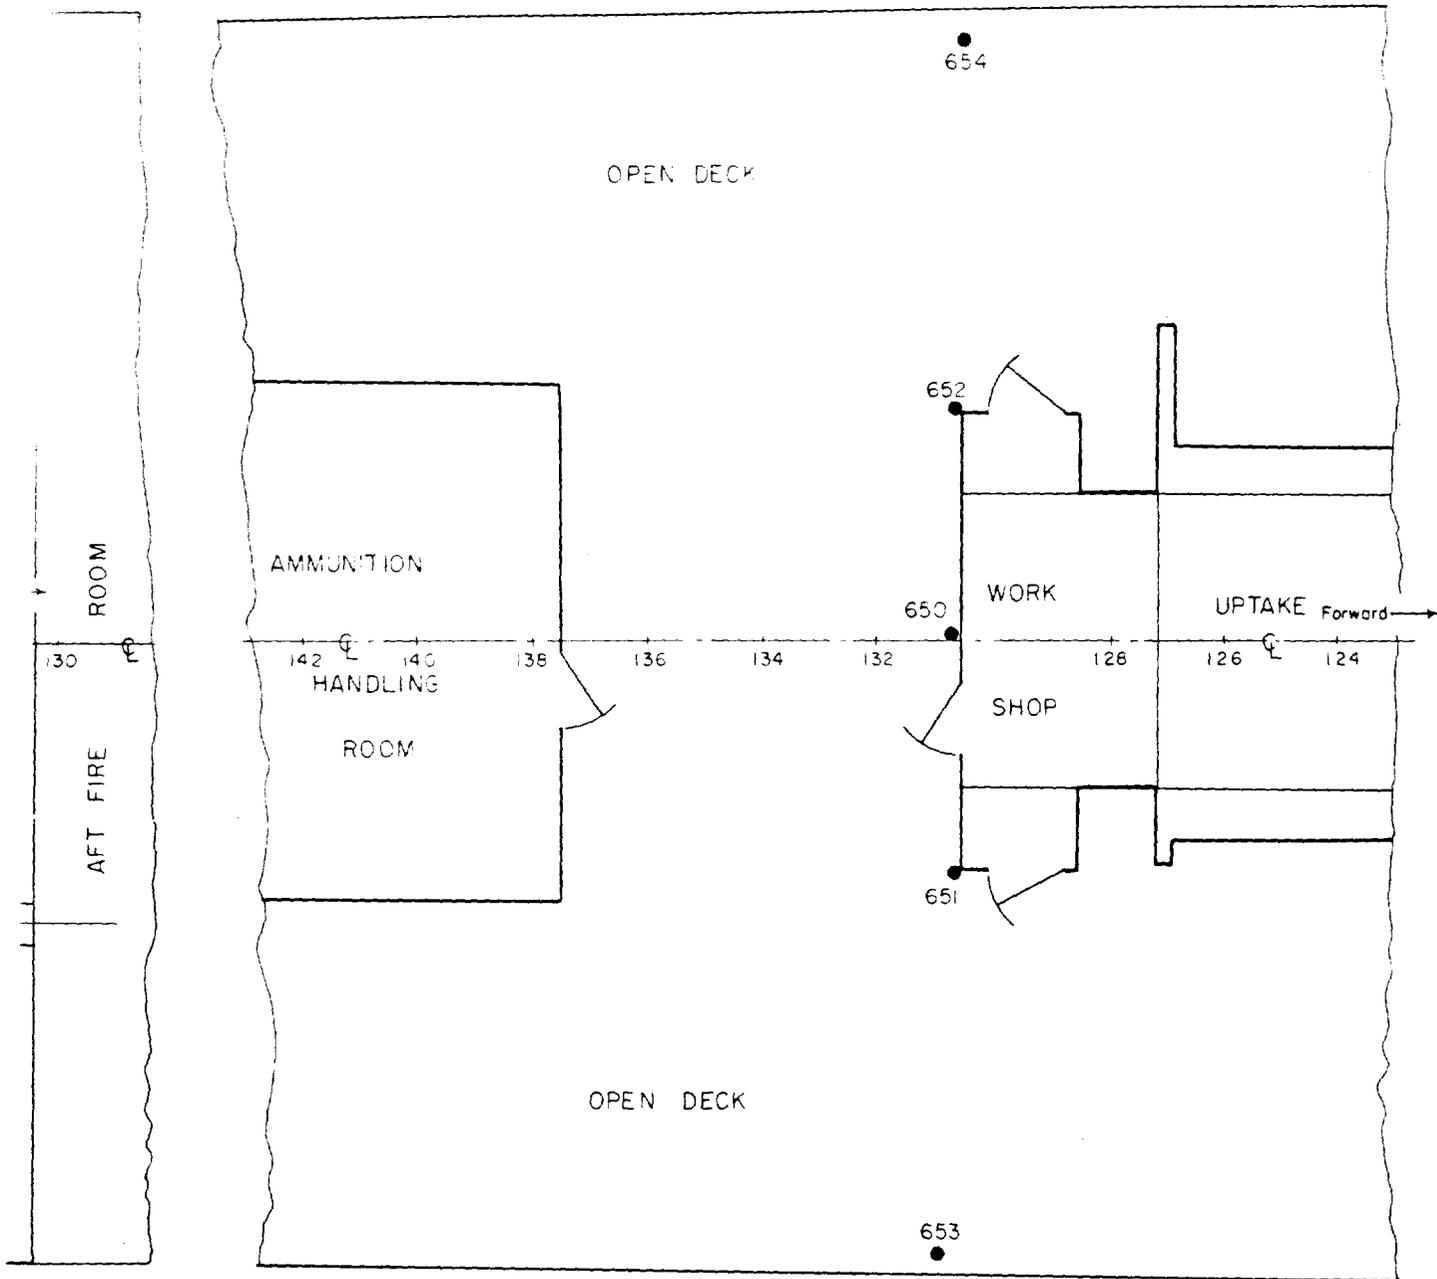


Figure C.15 Location and designation of film-badge stations on main deck (midship) aboard target ships.

**BEST AVAILABLE COPY**

**CONFIDENTIAL**

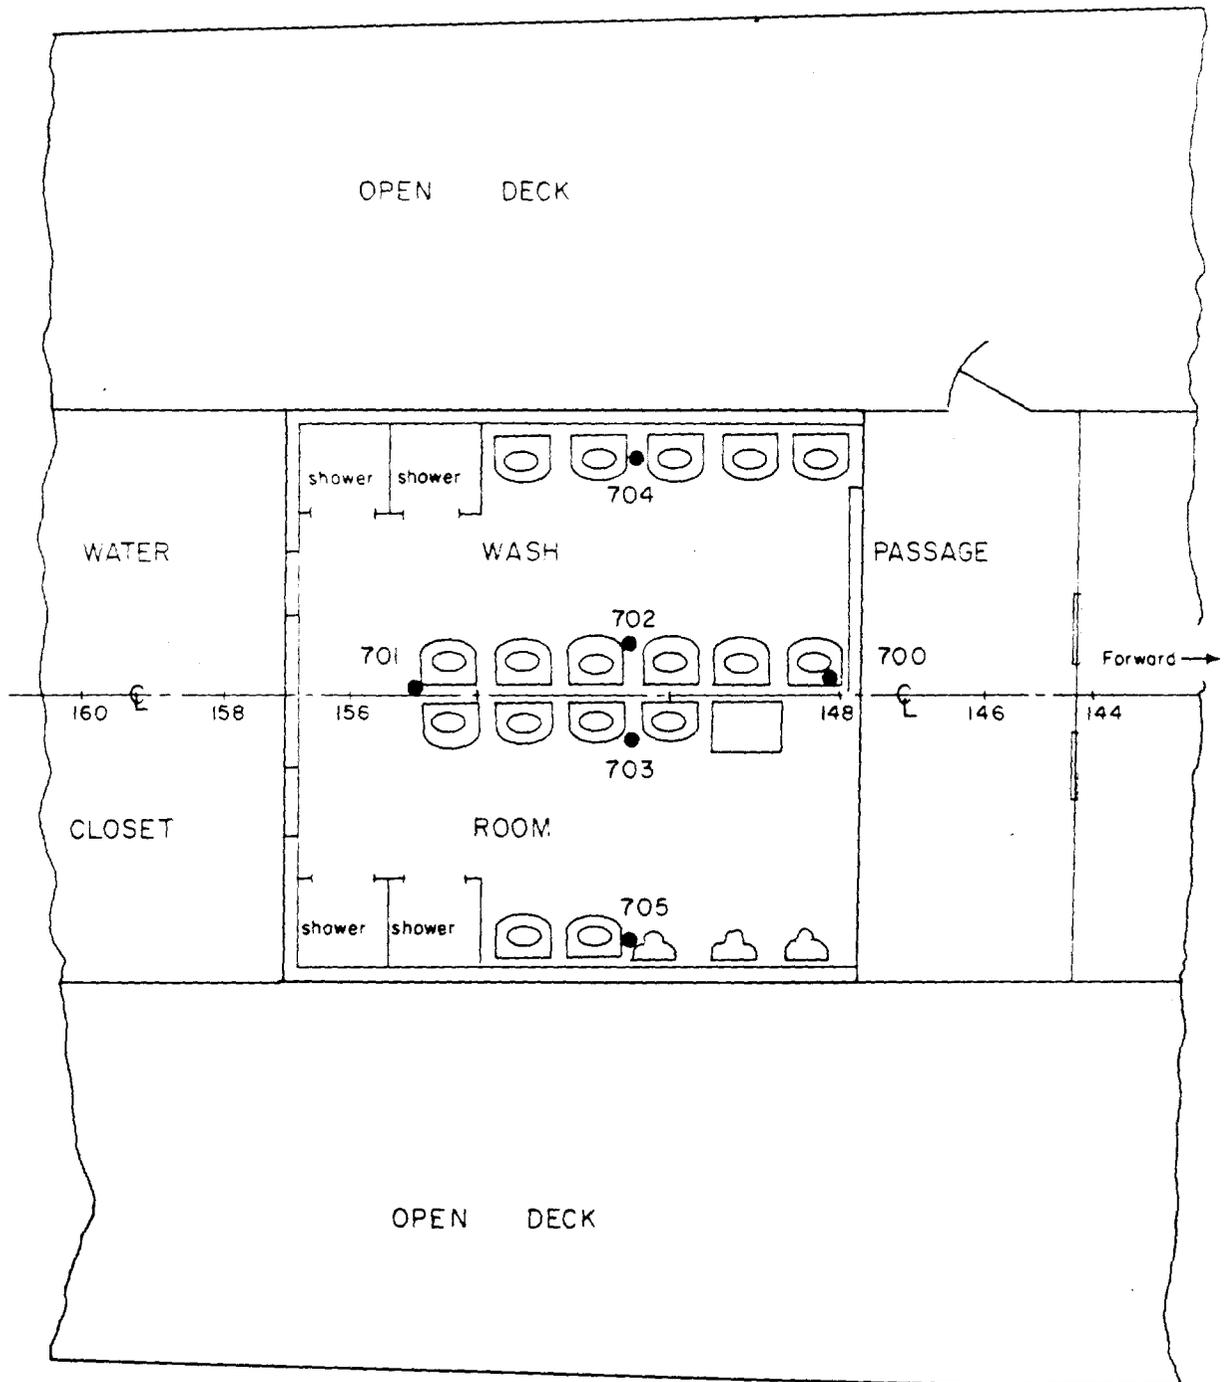


Figure C.16 Location and designation of film-badge stations in crew's washroom (main deck) aboard target ships.

**BEST AVAILABLE COPY**

~~CONFIDENTIAL~~

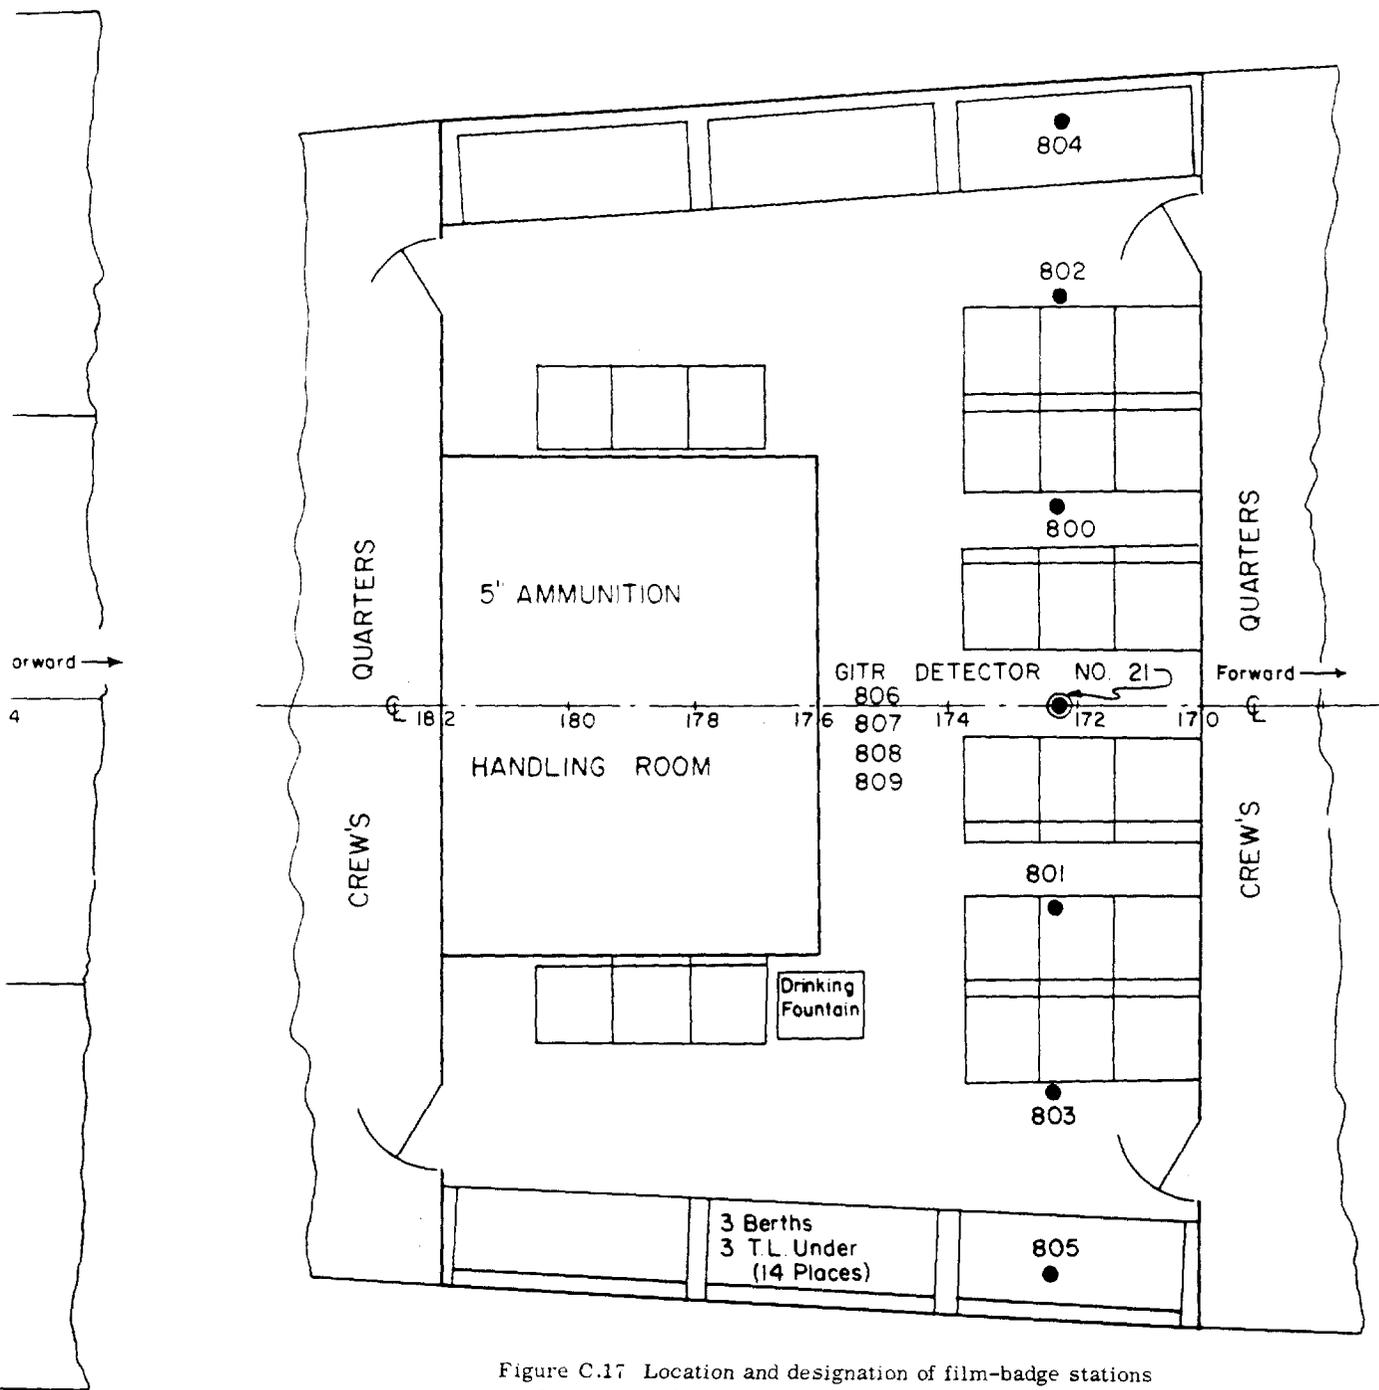


Figure C.17 Location and designation of film-badge stations in aft quarters (first platform) aboard target ships.

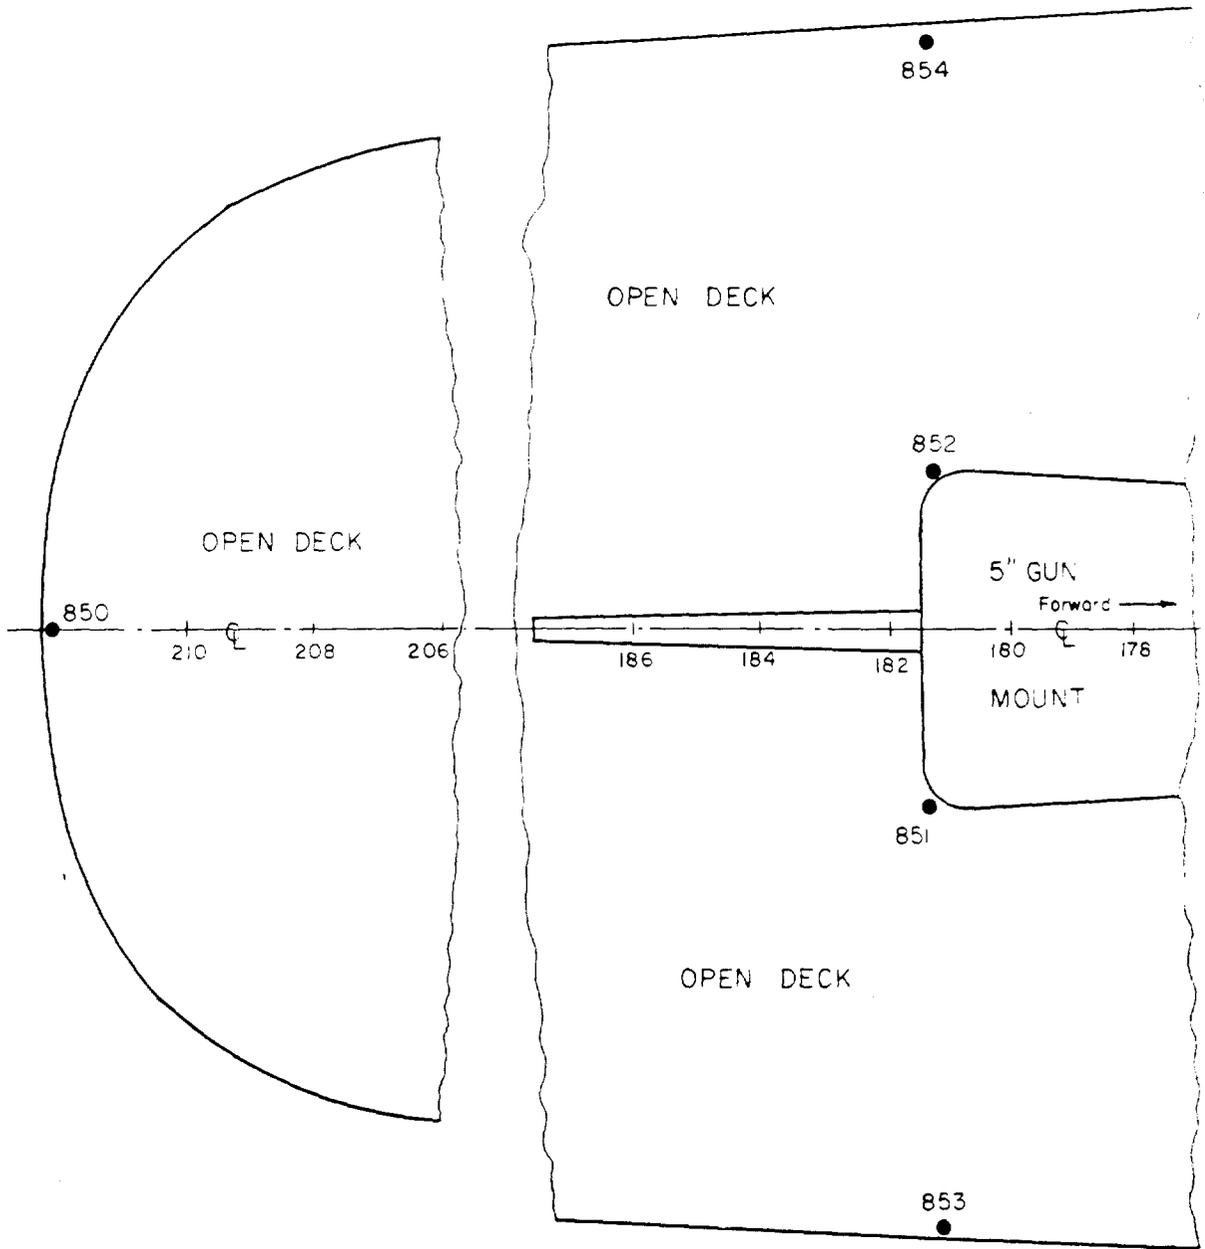


Figure C.18 Location and designation of film-badge stations on main deck (fantail) aboard target ships.

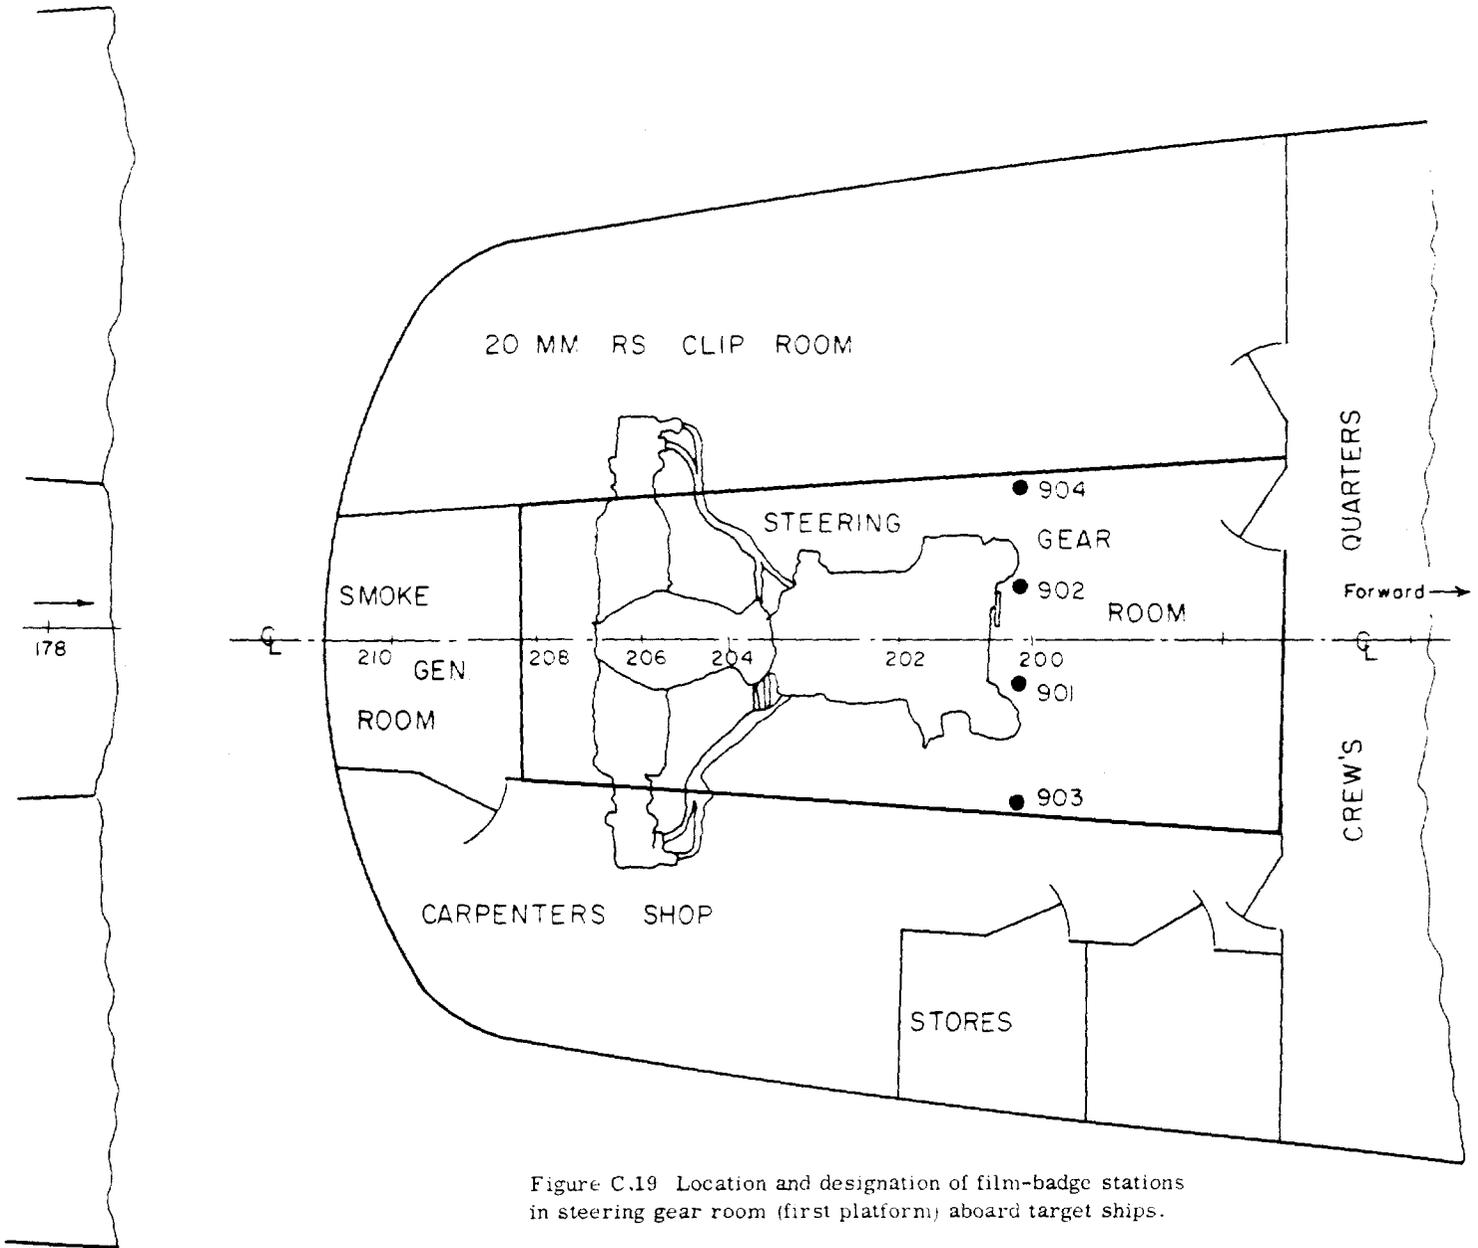


Figure C.19 Location and designation of film-badge stations in steering gear room (first platform) aboard target ships.

Appendix D

TABULATIONS OF GAMMA-RADIATION HISTORIES

Appendix D is not being published.

The appendix consists of 2 pages of text, 386 pages of numerical data tables (dose rates and doses versus time and location, and the like), and 3 figures that depict the estimated probable errors in average gamma dose rates and doses (versus time) on the weather decks of the target ships.

Initial distribution of Appendix D included 2 copies to Headquarters, Defense Atomic Support Agency (SWPET), 2 copies to Bureau of Ships (Codes 341 and 423), and 6 copies to U. S. Naval Radiological Defense Laboratory.

Readers desiring access to this more-basic data may obtain a copy on request sent to:

Commander  
Field Command, DASA  
ATTN: FCWT  
Sandia Base, New Mexico

## DISTRIBUTION

### Military Distribution Category 26

SES VOP-

Page

Agency  
al De-

ARMY ACTIVITIES			
1	Deputy Chief of Staff for Military Operations, D/A, Washington 25, D.C. ATTN: Dir. of S&F	44	Director, Armed Forces Institute of Pathology, Walter Reed Army Med. Center, 625 16th St., NW, Washington 25, D.C.
2	Chief of Research and Development, D/A, Washington 25, D.C. ATTN: Atomic Div.	45	Commanding Officer, U.S. Army Research Lab., Ft. Knox, Ky.
3	Assistant Chief of Staff, Intelligence, D/A, Washington 25, D.C.	46	Commandant, Walter Reed Army Inst. of Res., Walter Reed Army Medical Center, Washington 25, D.C.
4-6	Chief Chemical Officer, D/A, Washington 25, D.C.	47-48	Commanding General, Qm R&D Comd., QM R&D Cntr., Natick, Mass. ATTN: CBP Liaison Officer
7	Chief of Engineers, D/A, Washington 25, D.C. ATTN: ENGE	49-50	Commanding General, Qm. Research and Engr. Comd., USA, Natick, Mass.
8	Chief of Engineers, D/A, Washington 25, D.C. ATTN: ENGE	51-52	Commanding General, U.S. Army Chemical Corps, Research and Development Comd., Washington 25, D.C.
9-10	Office, Chief of Ordnance, D/A, Washington 25, D.C. ATTN: ORCTN	53-54	Commanding Officer, Chemical Warfare Lab., Army Chemical Center, Md. ATTN: Tech. Library
11	Chief Signal Officer, D/A, Research and Development Div., Washington 25, D.C. ATTN: SIGR--	55	Commanding General, Engineer Research and Dev. Lab., Ft. Belvoir, Va. ATTN: Chief, Tech. Support Branch
12	Chief of Transportation, D/A, Office of Planning and Insp., Washington 25, D.C.	56	Director, Waterways Experiment Station, P.O. Box 631, Vicksburg, Miss. ATTN: Library
13-14	The Surgeon General, D/A, Washington 25, D.C. ATTN: MEDNE	57	Commanding Officer, Diamond Ord. Fuze Labs., Washington 25, D.C. ATTN: Chief, Nuclear Vulnerability Br. (230)
15-17	Commanding General, U.S. Continental Army Command, Ft. Monroe, Va.	58-59	Commanding General, Aberdeen Proving Grounds, Md. ATTN: Director, Ballistics Research Laboratory
18	Director of Special Weapons Development Office, Headquarters COMARC, Ft. Bliss, Tex. ATTN: Capt. Chester I. Peterson	60	Commanding Officer, Ord. Materials Research Off., Watertown Arsenal, Watertown 72, Mass. ATTN: Dr. Foster
19	President, U.S. Army Artillery Board, Ft. Sill, Okla.	61	Commanding General, Ordnance Ammunition Command, Joliet, Ill.
20	President, U.S. Army Air Defense Board, Ft. Bliss, Tex.	62	Commanding Officer, USA Signal R&D Laboratory, Ft. Monmouth, N.J.
21	President, U.S. Army Aviation Board, Ft. Rucker, Ala. ATTN: ATBS-DG	63	Commanding General, U.S. Army Electronic Proving Ground, Ft. Huachuca, Ariz. ATTN: Tech. Library
22	Commanding General, First United States Army, Governor's Island, New York 4, N.Y.	64	Commanding General, USA Combat Surveillance Agency, 1124 N. Highland St., Arlington, Va.
23	Commanding General, Second U.S. Army, Ft. George G. Meade, Md.	65	Commanding Officer, USA, Signal R&D Laboratory, Ft. Monmouth, N.J. ATTN: Tech. Doc. Ctr., Evans Area
24	Commanding General, Third United States Army, Ft. McPherson, Ga. ATTN: ACofS G-3	66	Director, Operations Research Office, Johns Hopkins University, 6935 Arlington Rd., Bethesda 14, Md.
25	Commanding General, Fourth United States Army, Ft. Sam Houston, Tex. ATTN: G-3 Section	67	Commandant, U.S. Army Chemical Corps, CBR Weapons School, Dugway Proving Ground, Dugway, Utah.
26	Commanding General, Fifth United States Army, 1660 E. Hyde Park Blvd., Chicago 15, Ill.	68	Commanding General, Southern European Task Force, APO 168, New York, N.Y. ATTN: ACofS G-3
27	Commanding General, Sixth United States Army, Presidio of San Francisco, San Francisco, Calif. ATTN: AMOCT-4	69	Commanding General, Eighth U.S. Army, APO 301, San Francisco, Calif. ATTN: ACofS G-3
28	Commandant, Army War College, Carlisle Barracks, Pa. ATTN: Library	70	Commanding General, U.S. Army Alaska, APO 949, Seattle, Washington
29	Commandant, U.S. Army Command & General Staff College, Ft. Leavenworth, Kansas. ATTN: ARCHIVES	71	Commanding General, U.S. Army Caribbean, Ft. Amador, Canal Zone. ATTN: Cml Office
30	Commandant, U.S. Army Air Defense School, Ft. Bliss, Tex. ATTN: Command & Staff Dept.	72	Commander-in-Chief, U.S. Army Pacific, APO 956, San Francisco, Calif. ATTN: Ordnance Officer
31	Commandant, U.S. Army Armored School, Ft. Knox, Ky.	73	Commanding General, USARPANT & MDPF, Ft. Brooke, Puerto Rico
32	Commandant, U.S. Army Artillery and Missile School, Ft. Sill, Okla. ATTN: Combat Development Department	74	Commanding Officer, 9th Hospital Center, APO 180, New York, N.Y. ATTN: CO, US Army Nuclear Medicine Research Detachment, Europe
33	Commandant, U.S. Army Aviation School, Ft. Rucker, Ala.		
34	Commandant, U.S. Army Infantry School, Ft. Benning, Ga. ATTN: C.D.S.		
35	The Superintendent, U.S. Military Academy, West Point, N.Y. ATTN: Prof. of Ordnance		
36	Commandant, The Quartermaster School, U.S. Army, Ft. Lee, Va. ATTN: Chief, QM Library		
37	Commandant, U.S. Army Ordnance School, Aberdeen Proving Ground, Md.		
38	Commandant, U.S. Army Ordnance and Guided Missile School, Redstone Arsenal, Ala.		
39	Commanding General, Chemical Corps Training Comd., Ft. McClellan, Ala.	75-76	Chief of Naval Operations, D/N, Washington 25, D.C. ATTN: OP-ORIG
40	Commandant, USA Signal School, Ft. Monmouth, N.J.	77	Chief of Naval Operations, D/N, Washington 25, D.C. ATTN: OP-75
41	Commandant, USA Transport School, Ft. Eustis, Va. ATTN: Security and Info. Off.	78	Chief of Naval Operations, D/N, Washington 25, D.C. ATTN: OP-922G2
42	Commanding General, The Engineer Center, Ft. Belvoir, Va. ATTN: Asst. Cmdt, Engr. School	79	Chief of Naval Personnel, D/N, Washington 25, D.C.
43	Commanding General, Army Medical Service School, Brooke Army Medical Center, Ft. Sam Houston, Tex.	80-81	Chief of Naval Research, D/N, Washington 25, D.C. ATTN: Code 811
		82-84	Chief, Bureau of Naval Weapons, D/N, Washington 25, D.C. ATTN: DLI-3
			NAVY ACTIVITIES

85	Chief, Bureau of Medicine and Surgery, D/N, Washington 25, D.C. ATTN: Special Wpns. Def. Div.	140	Commander, Air Defense Command, Ent AFB, Colorado. ATTN: Operations Analysis Section, ADTC
86	Chief, Bureau of Ordnance, D/N, Washington 25, D.C.	141	Commander, Hq. Air Research and Development Command, Andrews AFB, Washington 25, D.C. ATTN: RDRWA
87	Chief, Bureau of Ships, D/N, Washington 25, D.C. ATTN: Code 423	142	Commander, Air Force Ballistic Missile Div. Hq. ARDC, Air Force Unit Post Office, Los Angeles 45, Calif. ATTN: WDSOC
88	Chief, Bureau of Yards and Docks, D/N, Washington 25, D.C. ATTN: D-440	143-144	Commander, AF Cambridge Research Center, L. G. Hanscom Field, Bedford, Mass. ATTN: CM4ST-2
89	Director, U.S. Naval Research Laboratory, Washington 25, D.C. ATTN: Mrs. Katherine E. Cass	145-149	Commander, Air Force Special Weapons Center, Kirtland AFB, Albuquerque, N. Mex. ATTN: Tech. Inf. & Intel. Div.
90-91	Commander, U.S. Naval Ordnance Laboratory, White Oak, Silver Spring 19, Md.	150-151	Director, Air University Library, Maxwell AFB, Ala.
91	Director, Material Lab. (Code 900), New York Naval Shipyard, Brooklyn 1, N.Y.	152	Commander, Lowry Technical Training Center (TW), Lowry AFB, Denver, Colorado.
92	Commanding Officer and Director, Navy Electronics Laboratory, San Diego 52, Calif.	153	Commandant, School of Aviation Medicine, USAF, Aerospace Medical Center (ATC) Brooks Air Force Base, Tex. ATTN: Col. G. L. Bekhuis
93-98	Commanding Officer, U.S. Naval Radiological Defense Laboratory, San Francisco, Calif. ATTN: Tech. Inf. Div.	154	Commander, 1009th Sp. Wpns. Squadron, Hq. USAF, Washington 25, D.C.
99	Commanding Officer and Director, U.S. Naval Civil Engineering Laboratory, Port Huenehue, Calif. ATTN: Code L31	155-156	Commander, Wright Air Development Center, Wright-Patterson AFB, Dayton, Ohio. ATTN: WCACT (For WCOSE)
100	Superintendent, U.S. Naval Academy, Annapolis, Md.	157-158	Director, USAF Project RAND, USAF Liaison Office, The RAND Corp., 1700 Main St., Santa Monica, Calif.
101	Commanding Officer, U.S. Naval Schools Command, U.S. Naval Station, Treasure Island, San Francisco, Calif.	159	Commander, Air Defense Systems Integration Div., L. G. Hanscom Field, Bedford, Mass. ATTN: SIDE-S
101	President, U.S. Naval War College, Newport, Rhode Island	160	Commander, Air Technical Intelligence Center, USAF, Wright-Patterson AFB, Ohio. ATTN: AFIC-4Ela, Library
102	Superintendent, U.S. Naval Postgraduate School, Monterey, Calif.	161	Assistant Chief of Staff, Intelligence, Hq. USAF, APO 633, New York, N.Y. ATTN: Directorate of Air Targets
104	Officer-in-Charge, U.S. Naval School, CEC Officers, U.S. Naval Construction Bn. Center, Port Huenehue, Calif.	162	Commander, Alaskan Air Command, APO 942, Seattle, Washington. ATTN: AACD
105	Commanding Officer, Nuclear Weapons Training Center, Atlantic, U.S. Naval Base, Norfolk 11, Va. ATTN: Nuclear Warfare Dept.	163	Commander-in-Chief, Pacific Air Forces, APO 955, San Francisco, Calif. ATTN: PFCIE-MS, Base Recovery
106	Commanding Officer, Nuclear Weapons Training Center, Pacific, Naval Station, San Diego, Calif.		OTHER DEPARTMENT OF DEFENSE ACTIVITIES
107	Commanding Officer, U.S. Naval Damage Control Tug. Center, Naval Base, Philadelphia 12, Pa. ATTN: ABC Defense Course	164	Director of Defense Research and Engineering, Washington 25, D.C. ATTN: Tech. Library
108	Commanding Officer, Air Development Squadron 5, VX-5, China Lake, Calif.	165	Executive Secretary, Military Liaison Committee, Department of Defense, Washington 25, D.C.
109	Commanding Officer, U.S. Naval Medical Research Institute, National Naval Medical Center, Bethesda, Md.	166	Director, Weapons Systems Evaluation Group, Room 1E880, The Pentagon, Washington 25, D.C.
110	Commander, U.S. Naval Ordnance Test Station, China Lake, Calif.	167	Commandant, The Industrial College of The Armed Forces, Ft. McNair, Washington 25, D.C.
111	Officer-in-Charge, U.S. Naval Supply Research and Development Facility, Naval Supply Center, Bayonne, N.J.	168	Commandant, Armed Forces Staff College, Norfolk 11, Va. ATTN: Library
112	Commander-in-Chief, U.S. Atlantic Fleet, U.S. Naval Base, Norfolk 11, Va.	169-172	Chief, Defense Atomic Support Agency, Washington 25, D.C. ATTN: Document Library
113	Commandant, U.S. Marine Corps, Washington 25, D.C. ATTN: Code A03E	173	Commander, Field Command, DASA, Sandia Base, Albuquerque, N. Mex.
114	Director, Marine Corps Landing Force, Development Center, MGS, Quantico, Va.	174	Commander, Field Command, DASA, Sandia Base, Albuquerque, N. Mex. ATTN: FCTG
115	Chief, Bureau of Ships, D/N, Washington 25, D.C. ATTN: Code 372	175-176	Commander, Field Command, DASA, Sandia Base, Albuquerque, N. Mex. ATTN: FCWT
116	Commanding Officer, U.S. Naval CIC School, U.S. Naval Air Station, Glynnco, Brunswick, Ga.	177	Commander-in-Chief, Strategic Air Command, Offutt AFB, Neb. ATTN: OAMS
117	Chief of Naval Operations, Department of the Navy, Washington 25, D.C. ATTN: OP-09E5	178	Commandant, US Coast Guard, 1300 E. St., N.W., Washington 25, D.C. ATTN: Cdr. E. E. Kalkhorst
118-120	Chief, Bureau of Naval Weapons, Navy Department, Washington 25, D.C. ATTN: RRLS	179	Commander-in-Chief, WCOM, APO 128, New York, N.Y.
121	Commander-in-Chief, U.S. Pacific Fleet, Fleet Post Office, San Francisco, Calif.	180	Commander-in-Chief, Pacific, c/o Fleet Post Office, San Francisco, Calif.
	AIR FORCE ACTIVITIES	181	U.S. Documents Officer, Office of the United States National Military Representative - BBAPE, APO 55, New York, N.Y.
122	Air Force Technical Application Center, Hq. USAF, Washington 25, D.C.	182	SAC (SUP3.1), Offutt AFB, Nebr.
123	Deputy Chief of Staff, Operations, Hq. USAF, Washington 25, D.C. ATTN: AFOOP		ATOMIC ENERGY COMMISSION ACTIVITIES
124	Hq. USAF, ATTN: Operations Analysis Office, Office, Vice Chief of Staff, Washington 25, D.C.	183-185	U.S. Atomic Energy Commission, Technical Library, Washington 25, D.C. ATTN: For IMA
125	Director of Civil Engineering, Hq. USAF, Washington 25, D.C. ATTN: AFOCE	186-187	Los Alamos Scientific Laboratory, Report Library, P.O. Box 1663, Los Alamos, N. Mex. ATTN: Helen Redman
126-136	Hq. USAF, Washington 25, D.C. ATTN: AFICIN-3D1, Rm 4B137, Pentagon	188-192	Sandia Corporation, Classified Document Division, Sandia Base, Albuquerque, N. Mex. ATTN: E. J. Smyth, Jr.
137	Director of Research and Development, DCS/D, Hq. USAF, Washington 25, D.C. ATTN: Guidance and Weapons Div.	193-202	University of California Lawrence Radiation Laboratory, P.O. Box 806, Livermore, Calif. ATTN: Clovis G. Craig
138	The Surgeon General, Hq. USAF, Washington 25, D.C. ATTN: Bio-Def. Pre. Med. Division	203	Weapon Data Section, Office of Technical Information Extension, Oak Ridge, Tenn.
139	Commander, Tactical Air Command, Langley AFB, Va. ATTN: Doc. Security Branch	204-235	Office of Technical Information Extension, Oak Ridge, Tenn. (Surplus)